


MODEL 20BHC (Effective June 1, 2006)

GOULDS PROPOSAL NO.	GOULDS S.O. NO.	INQUIRY NO.	CUSTOMER P.O. NO.	P.O. DATE	ITEM NO.	CUSTOMER
PROJECT			SERVICE		GPM CAPACITY	FT. TDH
					% EFFICIENCY	RPM

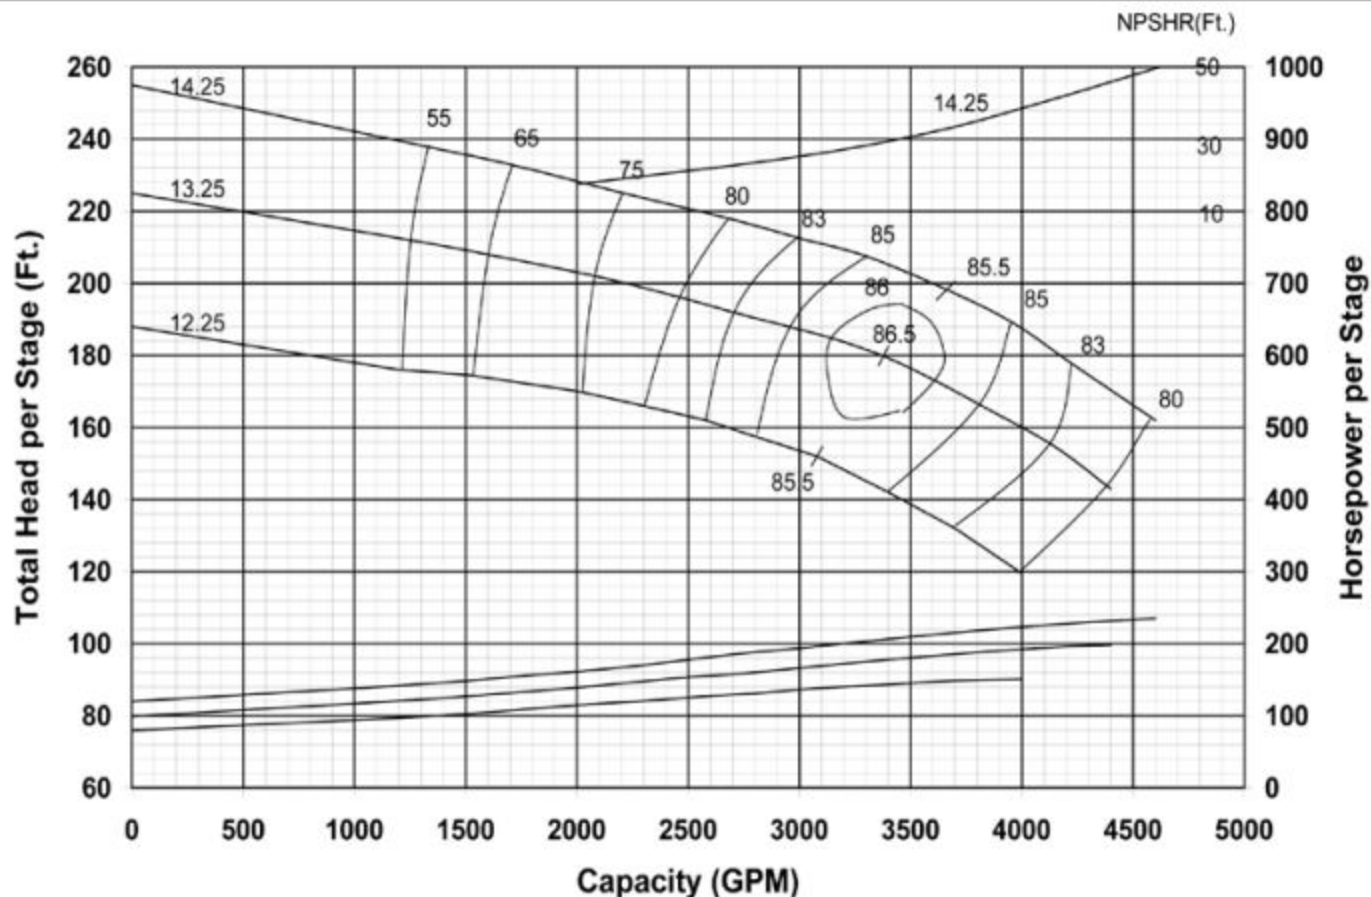

Curve No. E6420BBPC2	
Model 20BHC	
RPM 1770	
EFFICIENCY CORRECTION	
1-STAGE	-0.5
2-STAGE	
3-STAGE	
4-STAGE	
Impeller ENCLOSED	
Ns = 2034	
K = 18.8 LBS/FT	
K(Bal.)= N/A	
Bowl O.D.	19.75"
Bowl Lateral	0.81"
Max. PSI	327
Min. Subm	34"
TURBINE OPERATIONS Lubbock, Texas	
BOWL PERFORMANCE CURVE BASED ON PUMPING CLEAR, NON-AERATED WATER. RATED POINT ONLY IS GUARANTEED. CURVES REPRESENT SINGLE STAGE PERFORMANCE BASED ON TEST OF MULTI-STAGE BOWL ASSEMBLY. EFFICIENCY CORRECTION IS REQUIRED FOR LESSER STAGES.	