


Screw Thickeners

Widely used for:

- Thickening of waste paper
- Washing installations for virgin pulps, semichemical, deinked stock
- Thickening of groundwood rejects
- Thickening of groundwood
- Thickening of wet broke

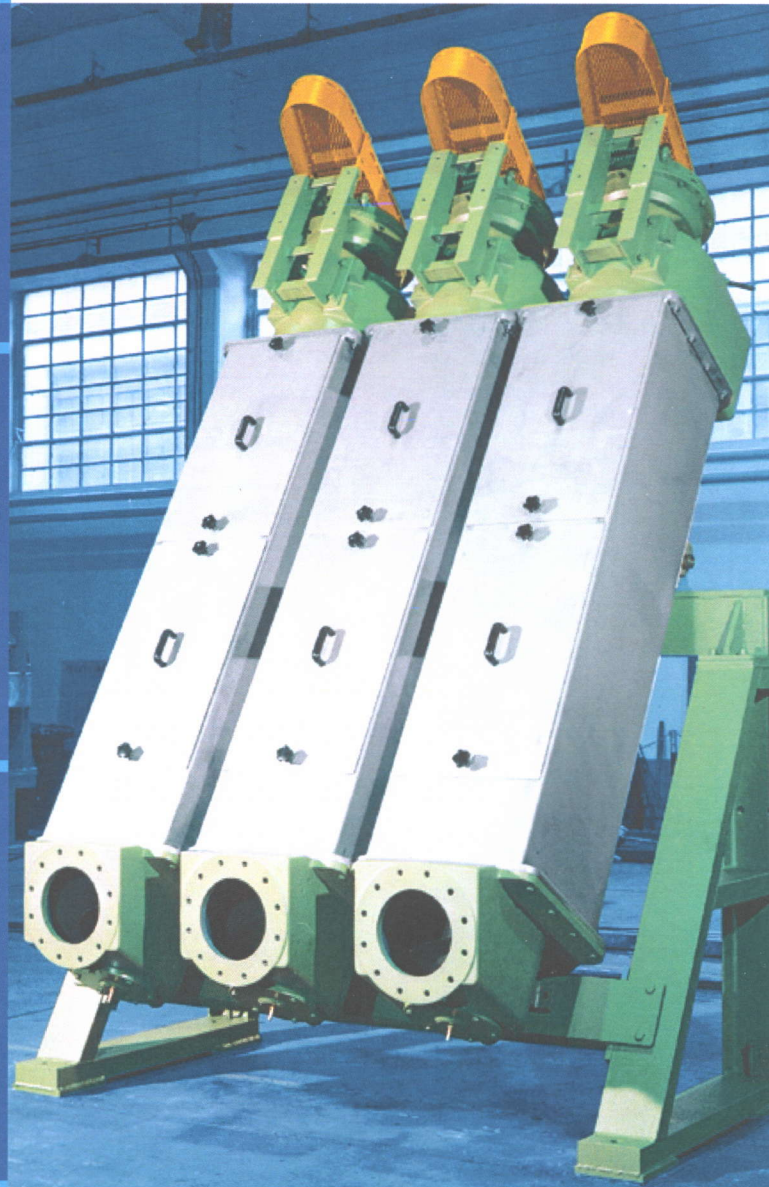







MAULE

Ing. S.MAULE & C. S.p.A.

Via G. di Vittorio, 11 - 10098 Rivoli (TO) - Italy

Tel. +39 011 9593456 - Fax +39 011 9594476

maule@maule.it - www.maule.it

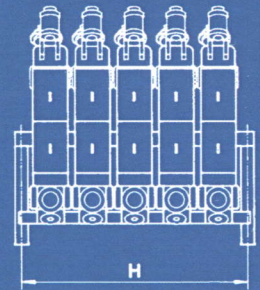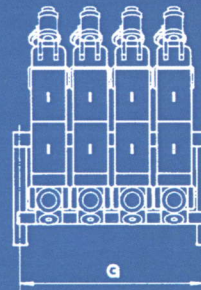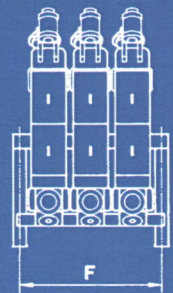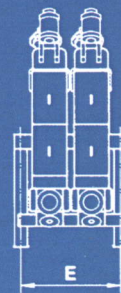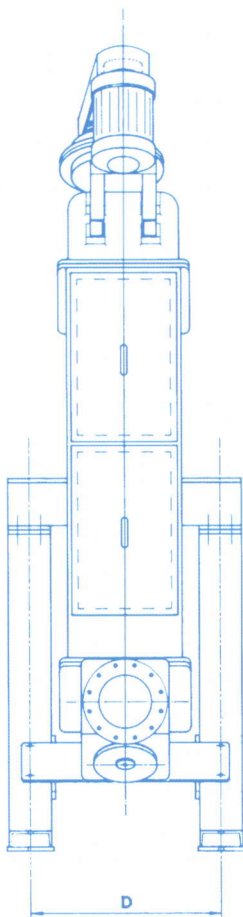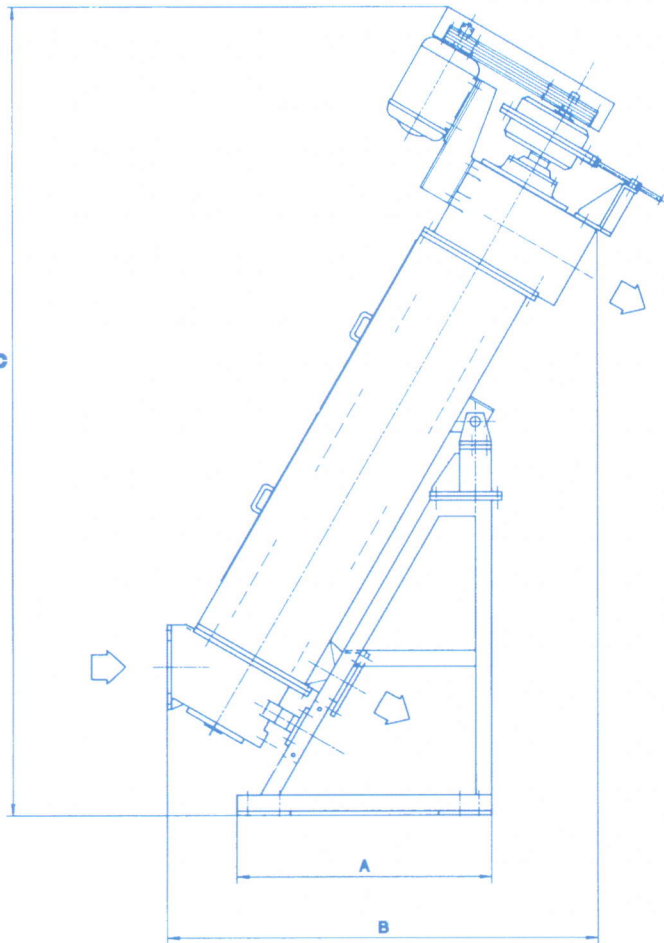

Screw Thickeners

Tipo - Type		MB 70	MB 75
Produzione massima (per vite) Max production (each screw)	T/D	25+30	50+60
Potenza massima Motor power	KW	5,5	11
Densità Density	Entrata - Inlet	1+4%	1+4%
	Uscita - Outlet	12+14%	12+14%
A		1000	1200
B		1520	2020
C		3000	3800
D		800	1200
E		1100	1550
F		1600	2200
G		2100	2850
H		2600	3500

(Quote non impegnative per l'installazione - Dimensions not binding for installation)