


FORK VARIETY OPTIONS



- » More than 20,000 forks in stock.
- » Wide variety of types and sizes.
- » Arrow carries forks and attachments for most model forklifts, skid steers, loaders, telehandlers, excavators, tractors, and backhoes; including large, medium, compact, and mini.

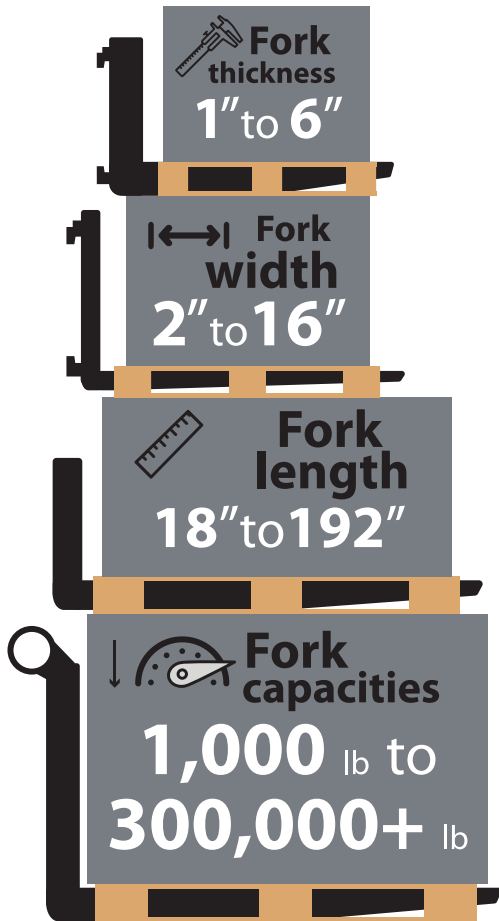

Standard ITA Forks




FTP Forks



Blank Forks




Block Forks

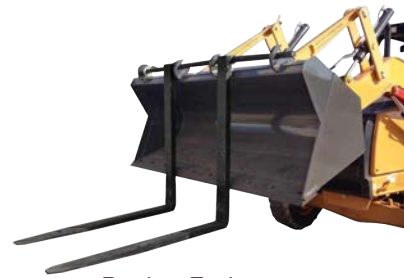


Bucket Forks



Telehandler Forks

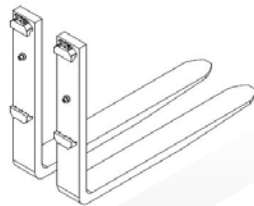

Custom Forks



Fork Shields



Heavy Duty Fork Extensions

CALL TODAY TO DESIGN YOUR CUSTOM FORKS

FOLLOW US ON:



BUCKET FORKS

PART NUMBER	SIZE	FORK EYES		SHAFT SIZE	BACK HEIGHT	FORK CAPACITY	QTY BRACKETS	BUCKET OPENING	BUCKET WIDTH
		ID	OD						
B1500-36	1-3-36 in	1 1/8 in	1.5 in	1 in	30 in	1,500 lb	3	up to 27 in	up to 54 in
B1500-42	1-3-42 in	1 1/8 in	1.5 in	1 in	30 in	1,500 lb	3	up to 27 in	up to 54 in
B3500-42S	150-3-42 in	2 1/8 in	3 in	2 in*	42 in	3,500 lb	3	up to 36 in	up to 55 in
B3500-42	150-3-42 in	2 1/8 in	3 in	2 in*	48 in	3,500 lb	3	up to 42 in	up to 55 in
B3500-48S	150-3-48 in	2 1/8 in	3 in	2 in	42 in	3,500 lb	3	up to 36 in	up to 55 in
B3500-48	150-3-48 in	2 1/8 in	3 in	2 in	48 in	3,500 lb	3	up to 42 in	up to 55 in
B4500-42S	150-4-42 in	2 1/8 in	3 in	2 in*	42 in	4,500 lb	4	up to 36 in	up to 72 in
B4500-42	150-4-42 in	2 1/8 in	3 in	2 in*	48 in	4,500 lb	4	up to 42 in	up to 72 in
B4500-48S	150-4-48 in	2 1/8 in	3 in	2 in	42 in	4,500 lb	4	up to 36 in	up to 72 in
B4500-48	150-4-48 in	2 1/8 in	3 in	2 in*	48 in	4,500 lb	4	up to 42 in	up to 72 in
B6000-48S	175-4-48 in	2 1/8 in	3 in	2 in*	48 in	6,000 lb	4	up to 42 in	up to 72 in
B6000-48	175-4-48 in	2 1/8 in	3 in	2 in*	55 in	6,000 lb	4	up to 49 in	up to 72 in
B8000-48S	2-4-48 in	2 1/8 in	3 in	2 in	48 in	8,000 lb	4	up to 42 in	up to 72 in
B8000-48	2-4-48 in	2 1/8 in	3 in	2 in*	66 in	8,000 lb	4	up to 60 in	up to 72 in
B8000-60	2-4-60 in	2 1/8 in	3 in	2 in*	66 in	8,000 lb	4	up to 60 in	up to 72 in
B10000-48	2-5-48 in	2 1/8 in	3 in	2 in*	74 in	10,000 lb	5	up to 63 in	up to 72 in
B10000-72	2-5-72 in	2 1/8 in	3 in	2 in*	74 in	10,000 lb	5	up to 63 in	up to 72 in
B18000-60	250-6-60 in	2 1/8 in	3 in	2 in*	74 in	18,000 lb	5	up to 63 in	up to 72 in
B28000-72	250-8-72 in	3 1/8 in	4.5 in	3 in	85 in	28,000 lb	5	up to 77 in	up to 96 in

HEAVY DUTY FORK EXTENSIONS

PART #	WIDTH	LENGTH
FE-460	4 in	60 in
FE-472	4 in	72 in
FE-484	4 in	84 in
FE-496	4 in	96 in
FE-560	5 in	60 in
FE-572	5 in	72 in
FE-584	5 in	84 in
FE-596	5 in	96 in
FE-660	6 in	60 in
FE-672	6 in	72 in
FE-684	6 in	84 in
FE-696	6 in	96 in

CALL TO REQUEST A CUSTOM QUOTE based on your MACHINE'S SPECIFICATIONS

ITA

ITA CLASS	STYLE	WIDTHS	THICKNESSES	LENGTH	CAPACITIES PER PAIR
II, III, IV, V	Standard Taper	2 to 16 in	1 to 6 in	18 to 192 in	1,000 lb to 308,400 lb
	Full-Bottomed Tapered				
	Top Polished	50 to 405 mm	25 to 150 mm	457 to 4,877 mm	460 kg to 142,130 kg
	Lumber				
	Gypsum				
	Block/ Brick				

FTP

FTP CLASS	STYLE	WIDTHS	THICKNESSES	LENGTH	CAPACITIES PER PAIR
II, III, IV, V	Full-Bottomed Tapered	2 to 16 in	1 to 6 in	18 to 192 in	1,000 lb to 308,400 lb
	Top Polished				
	Lumber	50 to 405 mm	25 to 150 mm	457 to 4,877 mm	460 kg to 142,130 kg
	Gypsum				

	STYLE	WIDTHS	THICKNESSES	LENGTH	CAPACITIES PER PAIR
BLANK	Standard Taper	2 to 16 in	1 to 6 in	18 to 192 in	1,000 lb to 308,400 lb
	Full-Bottomed Tapered				
	Top Polished	50 to 405 mm	25 to 150 mm	457 to 4,877 mm	460 kg to 142,130 kg
	Lumber				
	Gypsum				
	Block/ Brick				

BLOCK	CROSS SECTION	TYPICAL LENGTHS	MOUNTING OPTIONS	FORK TIPS	CAPACITY PER FORK
	2 x 1.5 in	Up to 48 in	ITA Clip, Nonstandard Clip, Shaft Mount, Blank	Custom tips available	1,600 lb each
	2 x 2 in	Up to 48 in			2,200 lb each

FORK WEAR INDICATOR

Thickness	Width	Length	Class
1.25 in	4 in	36, 42, 48 in	II
1.5 in	3 in	48 in	II
1.5 in	4 in	32, 36, 40, 42, 48, 54, 60, 72 in	II
1.5 in	5 in	36, 42, 48, 54, 60, 72 in	II
1.5 in	5 in	48 in	III
1.75 in	4 in	36, 40, 54 in	II
1.75 in	4 in	42, 48, 60, 72 in	II, III
1.75 in	5 in	36, 42, 48, 54, 60, 72 in	II, III
1.75 in	5 in	84 in	III
2 in	4 in	48, 72, 96 in	II, III
2 in	4 in	60 in	III
2 in	4 in	96 in	III & IV
2 in	5 in	36, 42, 48, 54, 60, 72, 84, 96 in	III
2 in	6 in	36, 42, 54 in	III
2 in	6 in	48, 60, 72, 96 in	III, IV
2.5 in	6 in	48, 60, 72, in	IV

*Products are manufactured according to the metric system but are shown in Imperial units (inches) for the purposes of these materials. Please consult an Imperial-to-metric conversion chart for exact specifications.

FORK SHIELD

PART NUMBER	DESCRIPTION	SHIPPING WEIGHT
HS-04-KIT	Fits on 4 in Wide Forks	0.75 lb each
HS-05-KIT	Fits on 5 in Wide Forks	0.75 lb each
HS-06-KIT	Fits on 6 in Wide Forks	0.75 lb each