




## **SPECIFICATIONS**



# McCloskey S130 3-Deck

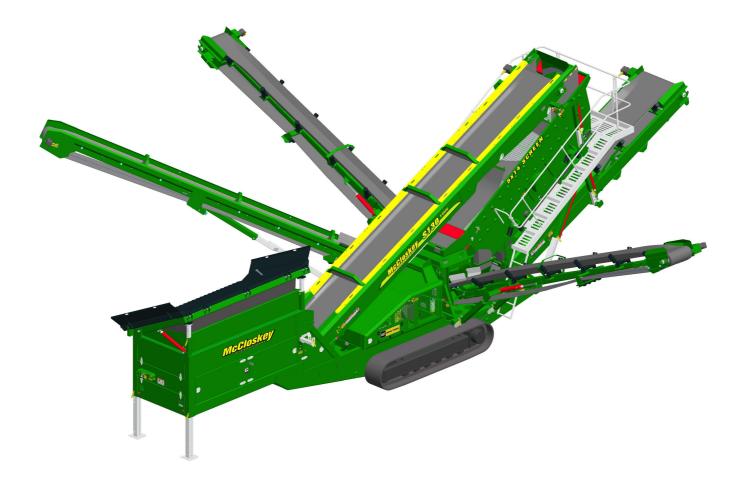



#### **DESCRIPTION**

Heavy duty mobile screener with following features:

- 14x5 heavy duty high energy 2 bearing 3 deck screenbox.
- 100Hp Cat engine.
- Track or wheel mobile.
- Integrated hydraulic folding stockpiling conveyors.
- 3 Deck auxiliary conveyor attaches to machine for one unit transport.
- Remote control tipping grid.
- Fast on site setup time 10 minutes.

#### **DIMENSIONS AND WEIGHTS**

Length - transport 15.09m (49' - 6")
Width - transport 3.0m (9' - 10")
Height - transport 3 deck track 3.45m (11' - 4")
Height - transport 3 deck wheel 3.73m (12' - 3")

Weight - track 29,000 Kgs (63,933 lbs) - estimated Weight - wheel 25,000 Kgs (55,115 lbs) - estimated

#### **CAPACITIES**

Diesel tank capacity

Hydraulic tank capacity

Capacity - 12ft hopper

399 L (105 US gal)

630 L (166 Gals)

8.01 m³ (10.48 yd³)

#### FEED CONVEYOR

Belt width 1200mm (48")
Belt spec Plain 500/3 6+3
Drive drum dia. 335mm (13.1")
Tail drum dia. 320mm (12.5")
Gearbox Bonfig 805 W2

Gearbox ratio 24.2

Gearbox torque 7000Nm cont, 12500Nm max

Motor Danfoss OMSS160 Flow rate 50.6 Lpm (13.4gpm)

Adjustable speed YES
Maximum speed 13.1 rpm

#### **MAIN CONVEYOR**

Belt width 1050mm (42")
Belt spec Plain 400/3 6+1.5
Drive drum dia. 285mm (11.2")
Tail drum dia. 270mm (10.6")
Motor Danfoss OMV630
Flow rate 72.6 Lpm (19.2gpm)

Adjustable speed OPTION
Maximum speed 115.2 rpm





#### TAIL CONVEYOR

Stockpile height - track model 3871mm (12' - 8") Stockpile height - wheel model 4139mm (13' - 7") 1200mm (48") Belt width Belt spec Plain - 400/2 6+1.5 Drive drum dia. 285mm (11.2") Tail drum dia. 270mm (10.6") Motor Danfoss OMV630 Flow rate 72.6 Lpm (19.2gpm)

Maximum speed 115.2 rpm

#### SIDE CONVEYOR

Stockpile height - track model 4600mm (15' - 1")
Stockpile height - wheel model 4870mm (15' - 11")
Belt width 650mm (26")

Belt spec Chevron - 400/3 6+1.5

Drive drum dia. 285mm (11.2")
Tail drum dia. 270mm (10.6")
Motor OMT400

Flow rate 50.6 Lpm (11.1 gpm)

Adjustable speed YES
Maximum speed 126.5 rpm

#### 3 DECK TRANSFER CONVEYOR

Belt width 650mm (26")
Belt spec Plain 400/3 4+2
Drive drum dia. 200mm (8")
Tail drum dia. 200mm (8")
Motor OMT400

Flow rate 50.6 Lpm (11.1 gpm)

Adjustable speed YES
Maximum speed 126.5 rpm

#### 3 DECK AUXILLARY CONVEYOR

Stockpile height - track model 4700mm (15.5')
Belt width 500mm (20")

Belt spec Chevron - 400/3 6+1.5

Drive drum dia. 290mm (11.5")
Tail drum dia. (Spoked) 270mm (10.6")
Motor OMT400

Flow rate 50.6 Lpm (11.1 gpm)

Adjustable speed YES
Maximum speed 126.5 rpm



### S130 3D

Oct. 2007, issue 002



#### **SCREENBOX**

Dimensions - top deck

Dimensions - middle deck

Dimensions - middle deck

Dimensions - bottom deck

Bearing type 3 Deck

4270mm x 1524mm (14' x 5')

4270mm x 1524mm (14' x 5')

3660mm x 1524mm (12' x 5')

NSK/RHP 22319 - 95mm bore

Screens - top deck 5' x 4' side tension - 3 off & 5' x 2' side tension - 1 off Screens - middle deck 5' x 4' side tension - 3 off & 5' x 2' side tension - 1 off

Screens - bottom deck
Tensioning - top deck
Tensioning - middle deck
Tensioning - bottom deck

Screen angle 25 to 34 deg

Screen motor DBH MCC2208 (58.9cc/rev)
Drive system Direct drive with HRC180 coupling

Hydraulic flowrate 72.6 Lpm (19.2gpm)

Speed adjustable YES - Pressure compensated FCV

Screen stroke adjustable 6 - 10mm maximum Screen shaft speed 1130 - 950 rpm Screen 'g' force 4.29 - 5.05

#### **POWERUNIT AND HYDRAULICS**

Engine CAT 3054 C DIT (Tier II)

Engine power 100 HP Engine speed 2200 rpm

Flywheel Pump 1 DBH 5033,5033,5023 LH PTO Pump 2 DBH 5023,5023 RH PTO Pump 3 DBH 2SPA11

Total system flow 339 L (89.5 US Gpm) Hydraulic tank capacity 630 L (166 US Gals)

Hydraulic tank ratio 1.85 : 1
Hydraulic Oil cooler YES

#### **ELECTRICS**

Emergency stops 6 off, 1 feeder, 2 powerunit RH&LH, 2

chassis front RH&LH, 1 Walkway

Chassis cabling
Start Siren
Engine shutdowns:

Armored cable
YES - 10 sec delay
Low oil pressure
High water temp

Air filter blockage (selectable)

Fuel contamination Low hydraulic tank level

Engine room light YES

Remote tipping grid YES - 2 function timed
Radio control tracks optional - Hetronic system
Pendant track control YES - plugged in at feeder end





#### **TRACKS**

 Width
 500mm (19.7")

 Length
 2920mm (9' - 7") crs

 Height
 739mm (29.4")

 Gearbox
 Bonfiglioli 707

Ratio 122:1 Motor Rexroth 63

Speed max 1.32 Kph (0.82 Mph) Flow rate 72.6 Lpm (19.2gpm)

Dual speed TBC

Attachment to chassis Bolt On for quick change

#### **WHEELS**

 Width
 2900mm (9' - 6")

 Axle centers
 1360mm (4' - 6")

 Wheels
 235/75/R17.5 dual

Axles 2 off
Brakes YES
Spring suspension YES
Mudguards YES
Handbrake OPTION
ABS OPTION

#### **OPTIONS**

Single or double deck live head

Roll-in bogie system

Single shaft shredder

Rinsing system

Crusher chute (available with 15ft hopper only)

Radio remote control

#### SAFETY FEATURES

External belt alignment points


External grease points

Engine safety shutdown systems

Full safety guarding for nip points






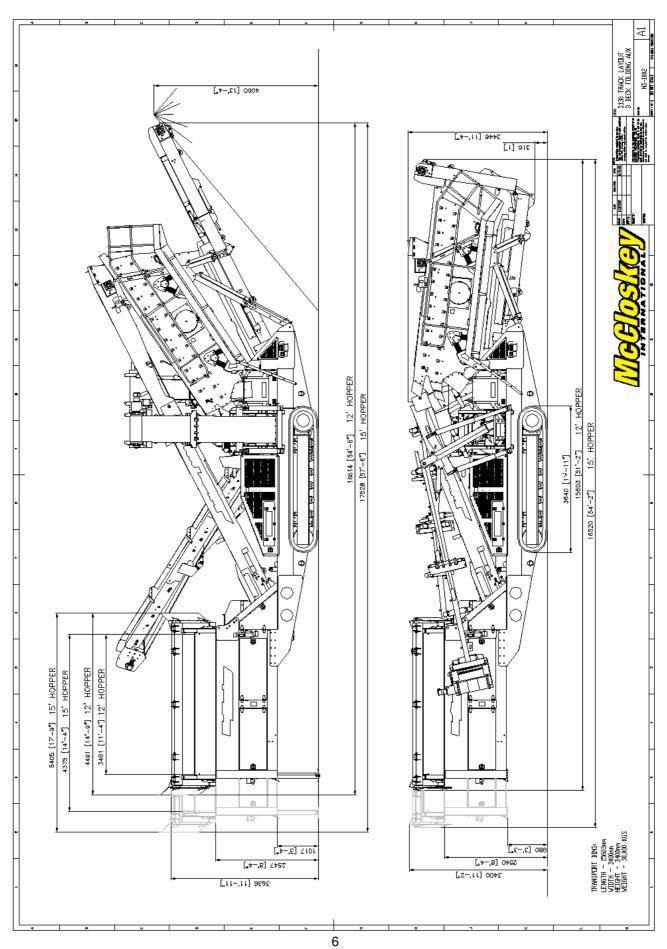






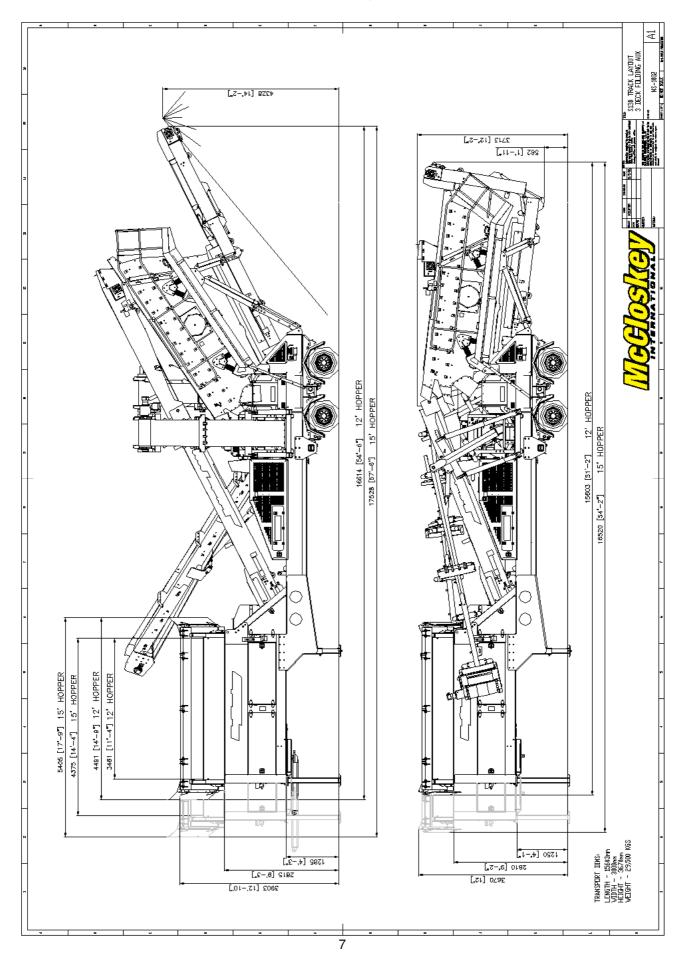





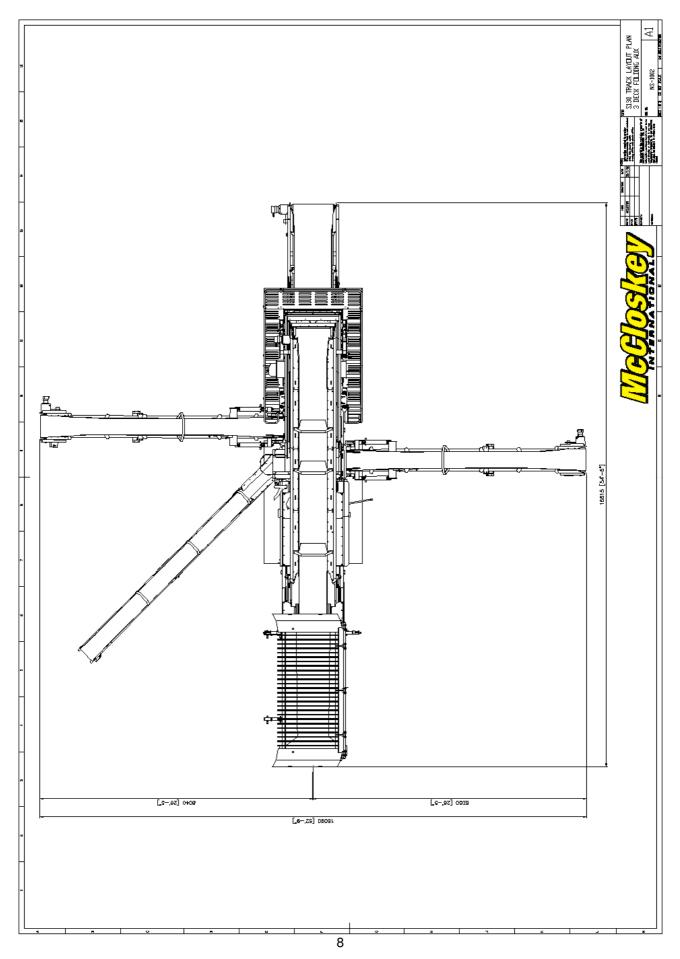



**\$130 3D**Oct. 2007, issue 002



