


THE EZ-SCREEN 2000T

— Now with Remote Control Track Undercarriage —



EZ-SCREEN PERFORMANCE PLUS ADDED MOBILITY

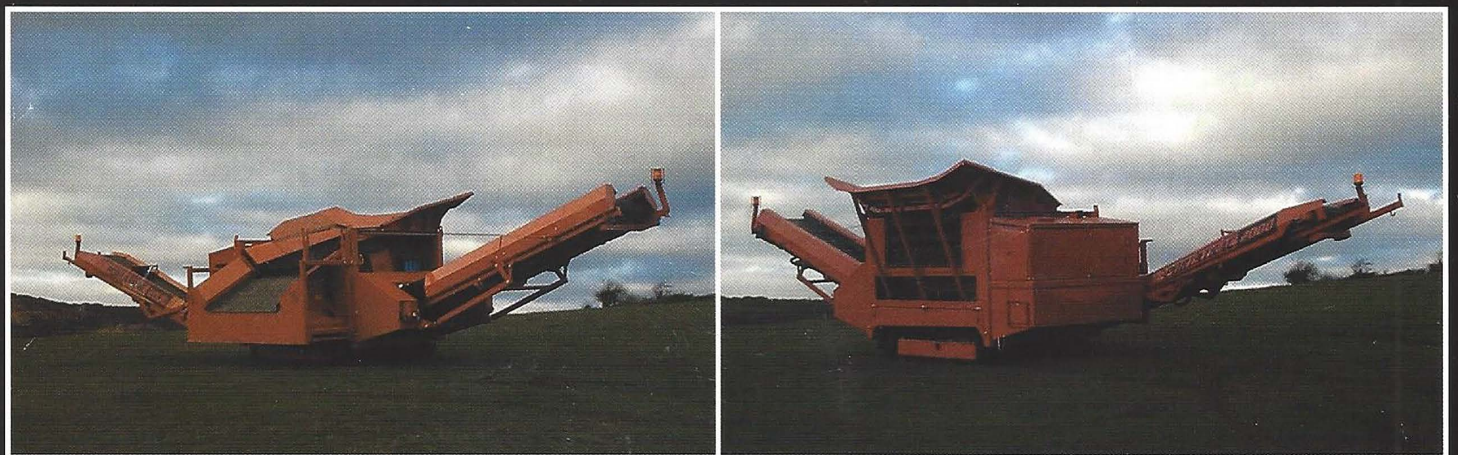

THE EZ-SCREEN 2000T - VITAL STATISTICS

FEATURES

- Water cooled, 41 HP Isuzu diesel (@2150 RPM) 4 cylinder with low oil/high temp shutdown
- Hand held radio or wired remote control of all travel and machine functions
- Loading bucket size range: 1-4 yds.
- Can be equipped with grizzly bars or woven screens on top deck, and woven or piano wire screens on bottom deck
- 6' x 7'7" bolted double-deck screen box with 6" clearance between screen shaft tube and bottom decks
- Engine compartment fully enclosed, lockable, and sound-suppressed for quiet operation
- Fuel tank: 13 gallons; Hydraulic tank: 50 gallons
- Main conveyor: 39" wide
- Optional middle product conveyor: 24" wide

SPECIFICATIONS

Transport Length:	19'0"
Overall Length: (operating) w/o middle product conveyor	29'4"
Overall Length: (operating) with middle product conveyor	42'0"
Transport Width: w/o middle product conveyor	9'6"
Transport Width: with middle product conveyor	13'0"
Transport Height:	9'2"
Main Conveyor Stockpile Hgt:	7'6"
Middle Product Stockpile Hgt:	6'7"
Max. Tipping Height:	9'2"
Max. Loading Width:	11'11"
Track Width: (overall)	7'4"
Individual Track Width:	16"
Ground Clearance:	14"
Weight: w/o middle product conveyor	19,900 lbs.
Weight: with middle product conveyor	22,000 lbs.



EZ-SCREEN 2000T
shown without middle product conveyor



EZ-SCREEN 2000T
shown with main conveyor folded

*Machine pictured with
optional equipment

1/01
Specifications subject to
change without notice.