COLORTROM 250



Mulch production doesn't get any easier than this. Forget parts wearing out, shafts jamming and paddles breaking. This no-wear, low-maintenance system produces up to 300 cubic color enhanced yards per hour and is made of tough steel and powerful peristaltic pumps. Our newly designed colorant and water spray delivery system dramatically reduces water and colorant use rates per yard. For producers who want a simple, effective, high-volume system for coloring mulches, this is it. Comes with the Amerimulch® commitment of total customer satisfaction. For maximum performance, always use Heartland® Enriched Colorants.

Specifications:

Production Range	200-300 Yrds/Hr*
Water Requirements	8-18 Gal/Yd**
Power Supply	480-Volt 3-Phase
Feed Hopper	20 Cubic Yard "Non-Bridging" Design

^{*} With a maximum bulk density of 500 lbs per cubic yard.


ALL SYSTEM PRICING INCLUDES INSTALLATION, MAINTENANCE AND SAFETY TRAINING.



amerimulch.com



^{**} Water rates are directly dependent on particle size and fiber moisture content.

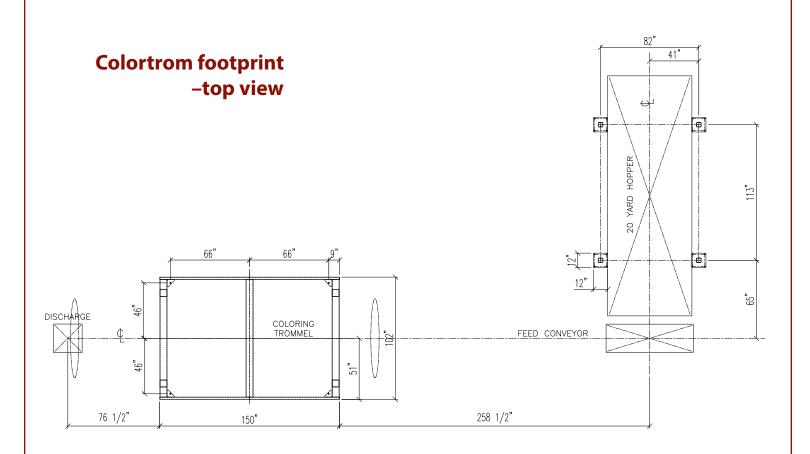

Colortrom footprint -side view

