

RHC 5-70 Trommel Screen

The Performance Screen for Smaller Operations!



Wildcat



28" wide integral hopper and feed system prevents bridging with most materials

- 50 cubic yards per hour capacity
- Attached stacking conveyors fold hydraulically
- Aggressive apron feeder system provides a more consistent flow of material than a belt system
- 3.75 cubic yards low profile hopper
- Low hopper no ramps
- Quick change screens
- Brushes for cleaning panels
- Isuzu 55 HP diesel engine
- State-of-the-art hydraulics
- All functions are variable speed
- Solid rubber tire drum drive for quiet operation and low maintenance
- Set up in under 15 minutes
- Transportable without permits
- 94 square feet of open screening area
- Tensioned screen panels
- UHMW lined screened product hopper
- Fold-down sides on hopper
- Pintle or optional fifth-wheel hitch

RHC 5-70 Trommel Screen


Easily transportable, both conveyors fold hydraulically for transport. Because of Wildcat's low hopper design there are no ramps to build or remove prior to moving the unit. The RHC 5-70 can be set up in under 15 minutes. Shown with optional fifth wheel hitch.



The brushes on the Wildcat continually remove material from the screen panels to prevent blinding assuring maximum efficiency.



All controls on the RHC 5-70 are centrally located and easy to understand. The engine is protected with a Murphy shut down system. Each control has a variable speed function to suit a variety of materials.

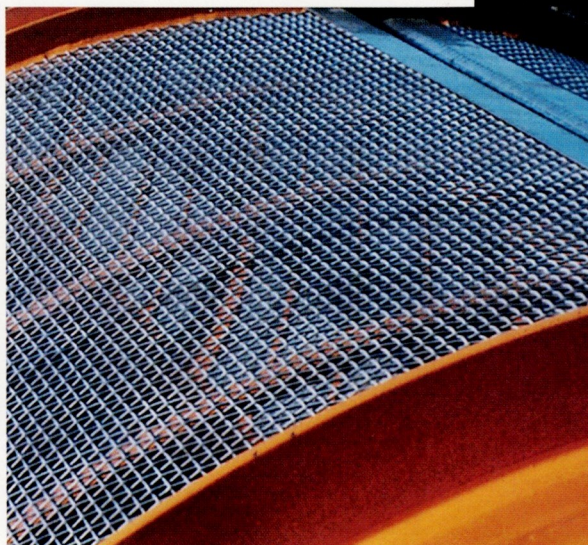

Tensioned screen panels allow screens to be changed in about one hour with simple hand tools.

***The RHC 5-70 retains the trademark features
that have made Wildcat number one in the industry!***



Wildcat

Bulletin RHC 5-70-601

800-627-3954

605-925-4512

605-925-7536 Fax

E-mail: wildcat@wildcatmfg.com

www.wildcatmfg.com