


FINTec **570**

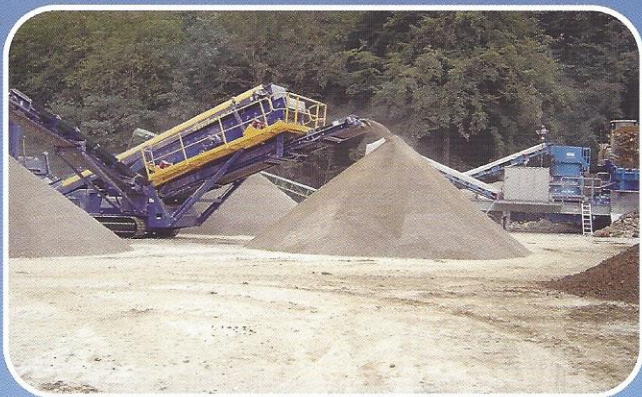

- High capacity 18'x5' (5450mm x 1500mm) double deck screen.
- Most suitable screen available for maximum screening efficiency of finished quarry products.
- Crusher inlet chute fitted as standard to work in tandem with primary or secondary crushers.
- Fintec now offers you single source crushing and screening solutions for all your applications.


Recycling — Contracting — Demolition

FINTEC 570

Technical Specifications



Screenbox	18ft x 5ft (5.45m x 1.5m)	Main Conveyor	1050mm 3 ply (42")
Reject Grid	12ft Remote Control Tipping with By-pass Chute	Side Conveyors	800mm Chevron (31.5") Variable Speed
Engine Type	Deutz Water Cooled Diesel	Tail Conveyor	1200mm 3 ply (48")
Engine Power	72 Kw (96 Hp)	Machine Weight	34 tonnes (38.08 US Tonnes)
Hopper Capacity	8m ³ (10.4yd ³)	Vibrating Grid	12ft Double Deck
Beltfeeder	1200mm Inclined 3 ply (48") Variable Speed	Wheel Version	Tri-Axle Undercarriage

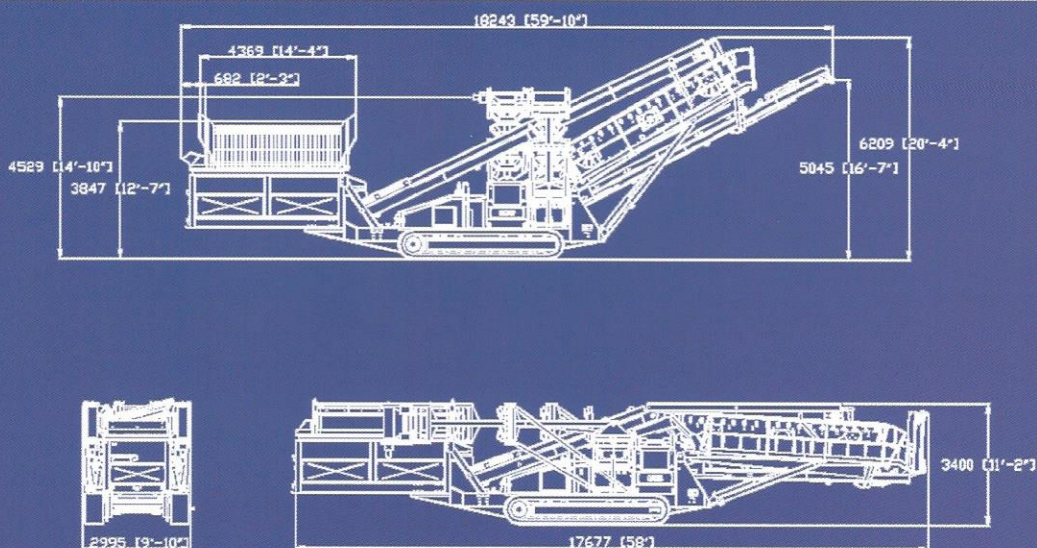

FINLAY BME LTD. TULLYVANNON BALLYGAWLEY CO.TYRONE NORTHERN IRELAND BT70 2HW
 TEL +44 (0) 28 8556 7799 FAX: +44 (0) 28 8556 7007
 EMAIL SALES@FINLAYBME.CO.UK WEB WWW.FINLAYBME.CO.UK