



## TRACKED TROMMEL


The DK 620TK is a tracked trommel designed specifically to meet the needs of the European and ROW market. The DK 620TK has been designed to meet the needs of plants dealing in wood waste, compost, Light C&D waste and general MSW.

The interchangeable drum is removable from the side of the machine via a side opening door and retractable feed conveyor. The quick change drum system allows a machine to be quickly changed to a different feed material rapidly, eliminating the need for multiple machines for multiple waste streams on site. The machine will also fit readily available standard 620 drums, also used on Doppstadt, Terex and EDGE trommels, amongst other. There is an intelligent control system designed to optimize throughput without causing stalling or slowing of the drum screen.

## FEATURES

- Hydraulically adjustable drum brushes
- Intelligent electrical control unit
- Variable speed feed conveyor
- 13' (4m) tracks for superior maneuverability & stability
- Hydraulically adjustable track frame for increasing ground clearance
- CAT 3.6 100KW (136HP) Stage V / Tier 4 Final\*
- Fuel efficient Hydraulics system
- User Friendly Hydraulic Controls
- Hydrostatic drive transmission
- Adjustable transfer conveyor divert chute
- Chain drive drum
- Hydraulically adjustable conveyor angle

# DZ 620K

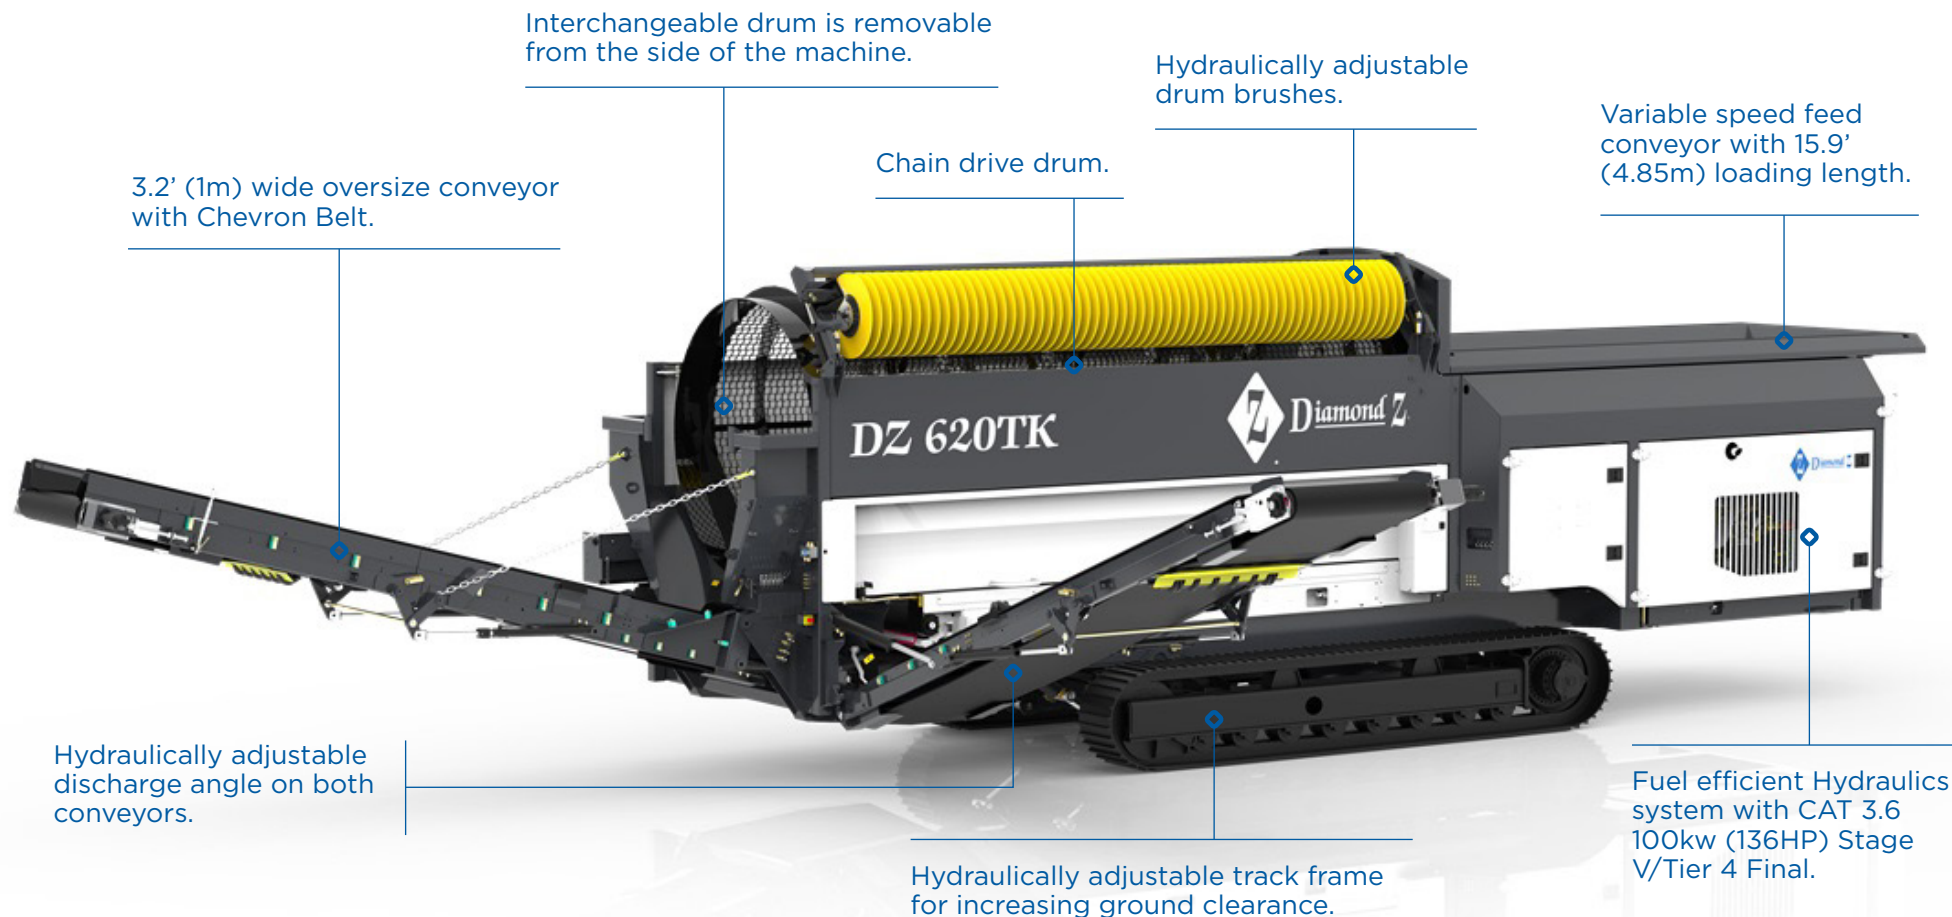

**Diamond Z**

## DIMENSIONS AND CAPACITIES

Weight	24,000kg (52,910 Lbs.)	Working Height	11' 11" (3.64m)
Transport Height	11' 1" (3.38m)	Working Length	50' 7" (15.42m)
Transport Length	38' 4" (11.68m)		
Transport Width	9' 10" (2.99m)		

© Copyright 2024 Diamond Z. All rights reserved.  
Diamond Z reserves the right to make changes to the information and design of the machines on this brochure without reservation and notification to the users. Information at time of print considered accurate — Diamond Z assumes no liability resulting from errors or omissions in this document.