TR75 TRACKED CONVEYOR

ANACONDA®
A McLanahan Company

The Anaconda TR Range of Mobile Tracked Conveyors are designed for the Material Handling Sector and aim to reduce production time and save stockpiling costs.

The **TR75** is our Mid-Sized Tracked Conveyor. Fully equipped with a 75' Stockpiling Conveyor it allows for stockpiling or feeding of a range of applications. The **TR75** has a variable speed conveyor in order to facilitate for different applications such as sand, gravel, aggregates, compost, coal and wood chip.

The **TR75** can be shipped worldwide within a 40' sea container and has become widely recognised in the market. Set up is simple and the machine can be running within 10 minutes of delivery. Commissioning is aided with the hydraulic controls to fold and unfold the Conveyor for transport.

Anaconda stock a full range of spare parts as a display of our commitment to provide a dedicated and responsive service to all our customers.

TR75 TRACKED CONVEYOR

ANACONDA®
A McLanahan Company

Specialists in Engineering Solutions for the Recycling and Material Handling Sectors

SPECIFICATIONS AND TECHNICAL DETAILS

Features
- 75' (23M) Long plate framed conveyor body
- Variable Speed
- Hydraulic folding head/tail section as standard
- Hyraulic raise and lower of front and rear legs
- Impact bed under feedboot as standard
- 3 Ply 42'' (1050mm) Wide plain belt as standard

Engine Options
- T3a – JCB444 DieselMAX – 63KW / 85HP
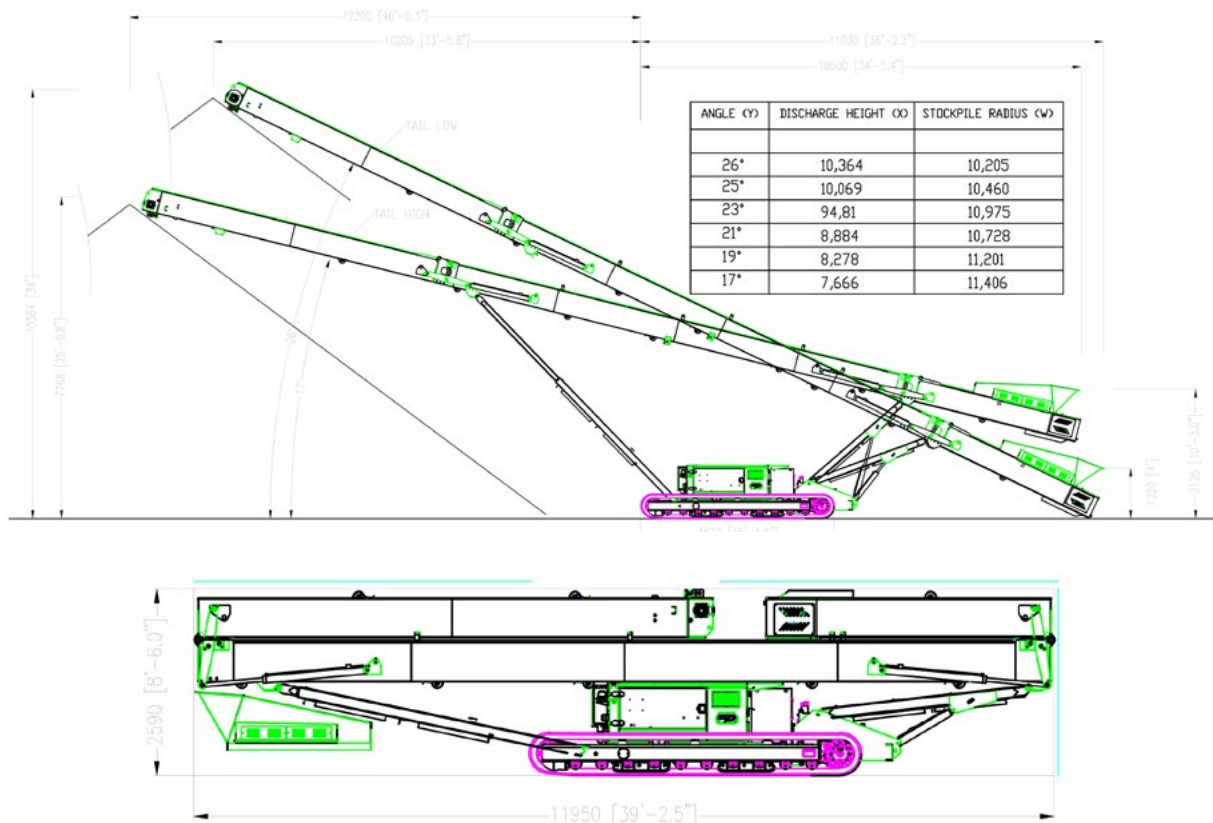- T3a – Duetz Turbo 2011 – 49.5KW / 66HP

Options
- Side skirting to enclose belt
- 4 Ply plain belt
- Chevron belt
- Belt weigh scale
- Overband Magnet

Weight
- 14,500KG

WORKING AND TRANSPORTATION DIMENSIONS

ANGLE (Y)	DISCHARGE HEIGHT (X)	STOCKPILE RADIUS (W)
26°	10,364	10,205
25°	10,069	10,460
23°	94,81	10,975
21°	8,884	10,728
19°	8,278	11,201
17°	7,666	11,406

Anaconda sell and distribute our entire product portfolio via a Dealer Network, For your nearest dealer please contact us or visit our website.

Anaconda reserves the right to make changes to design without reservation and without notification. Tonnage estimations are dependent on fractions, material type, size and application.