GRINDER CRUSHER SCREEN

FYREBX®

T3



The 300 gallon water delivery attachment built for skid steers and compact track loaders.

Built for: Firefighting, construction/mining, landscaping forestry/timber, utility companies & agriculture.



FYREBX T3 HEAVY DUTY - SKID STEER ATTACHMENT

FYREBX T3 is a patented compact track loader skid steer attachment that quickly deploys **300 gallons of water** across terrain that many trailers and other equipment are unable to reach. It exceeds the current utility fire safety requirements for fuel reduction.

Key Specifications

Capacity
300 gallons (1,136 liters) of water/ water-soluble product


Weight
850 lbs (empty)
3,200 lbs (full)

Compatibility
Attaches to all compact track loaders 7,500 lbs or more

Outer Dimensions (Wide x Tall x Deep)
83" x 41" x 61"

Seeding
With hydroseed LANDBX upgrade. Pellet hydro-mulch material only.

Dispersal
From nozzle(s), hose, or monitor gun (monitor gun not included in base model)

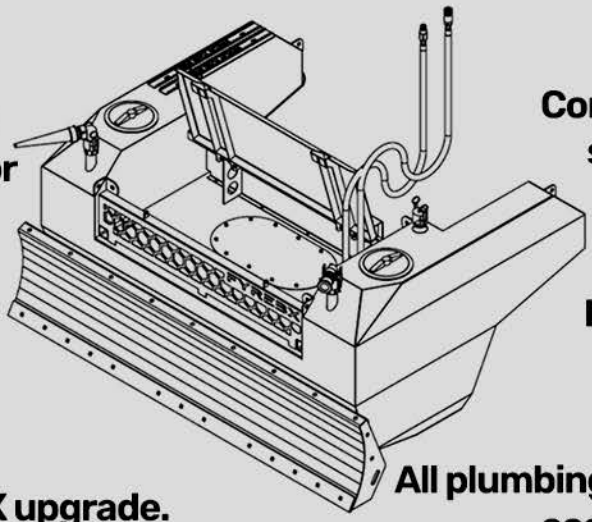

Standard Features

Jet Agitation
Circulation up to 250 gal per min

Air-Aspirated Nozzle
Will produce 10:1 espansion = 3,000 gal of foam

Hydraulic Flow
Compact track loader standard hydraulic flow required

Draft Capacity
Draft fill using hider auxillary pump

Plumbing
All plumbing NPT or NST. 2 Two accessory recivers: 2"

Tank Construccion
Welded from 10,12 and 14-gauge steel (approx. 3.4 mm to 1.9 mm thickness)







Additional Features



Submerged Hydraulic Water Pump
Water flow rate range: 1-250 gpm depending on hydraulic flow & nozzle type. Pressure range: 40-145 psi depending on hydraulic flow and nozzle type. Can be increased to 150 psi with a specialized pump.

Hydraulic Flow Control
Can safely be operated from #5 (8 gpm/ 30.3 lpm) to #7 (10 gpm/38 lpm) on the flow control to achieve desired water psi and gpm

Baffles
One (1) effective long and two (2) transverse

Interior Finish
3m scotch coat - cathodic protection

Exterior Finish
Durable powder-coated paint

Compact Track Loader Attachment Plate
1/4" (6.35 mm) Steel rated at 30,000 lbs

Forklift Skids
1/4" (6.35 mm) steel.

Lift Points
Four (4) lift points for helicopter or crane: rated to 6,000 psi/hook 24k psi total

Multiple Accessories and customizations available







FYRE3X®
+1-530-255-4431
info@fyrebx.com
www.fyrebx.com
2000 Frontier Trail - Unit C Anderson, CA 96007

+1-770-433-2670
sales@grindercrusherscreen.com
www.grindercrusherscreen.com
1772 Corn Rd, Smyrna GA 30080

GRINDER CRUSHER SCREEN