SCREEN U.S.A.®

FEEDER STACKERS







NEW SCREEN USA ROAD PORTABLE FEEDER STACKING CONVEYOR WFS6542




DIMENSIONS

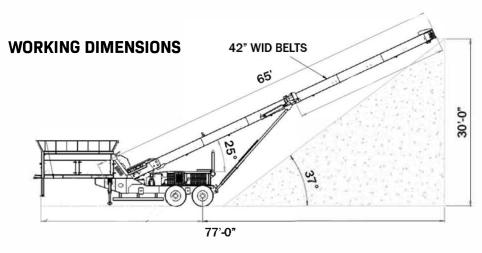

TRANSPORT DIMENSIONS

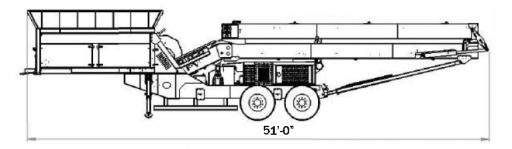



ENGINE

- 74HP Tier 4 final diesel engine

FRAME

- Deep folded plate frame constructed with heavy duty cross bracing for strength and stability.
- Hydraulic folding head section.
- Hydraulic raise/lower for discharge.
- Removable hopper section for ease of transport/-maintenance.
- Replaceable wear liners in hopper.

BELT

- 3-ply equivalent (European style) vulcanized.
- Chevron belt on discharge (optional)
- Adjustable polyurethane belt cleaner.

OTHER

- Remote twin drive on discharge.
- Loading height: 12'
- Stockpile capacity: 1,539 cu.yd
- Weight: 34,172 lbs

