




POWER TAKE OFF INDUSTRIAL TUB GRINDERS

- CONFIGURABLE
- ADAPTABLE
- CHANGEABLE
- SWITCHABLE



THE MONSTER TUB GRINDER WITH MONSTER PRODUCTION!

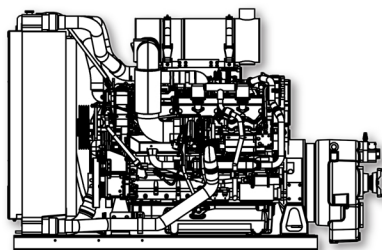

**EASILY
SWITCH
FROM
DIESEL TO
ELECTRIC
POWER
IF NEEDED.**




Spanning over five decades, CW Mill Equipment Co., Inc. has been manufacturing Power Take Off (PTO) grinders in addition to its diesel and electric powered units with increased efficiency, reduced maintenance, massive construction, and simplicity.

PTO HogZilla Grinders utilize long standing and proven methods to adapt & switch the machines power unit as needs change. A PTO Grinder can easily be switched from diesel to electric powered if needed, or power unit brands, models, & horsepower can be changed. Expensive Power units can be shared with other equipment as well.

A wide range of options are also available including both stationary and portability options for moving the grinder.

Whether you grind stumps and logs by the acre, wood waste by the ton or green waste by the yard, HogZilla is manufactured to provide maximum production per hour.

HogZilla's are built for reliability, while providing you the most profit. With the added benefit of being able to switch between power sources, allowing even greater flexibility, the HogZilla TC-PTO Series Grinders will deliver the dependability you need & the performance you can bank on!

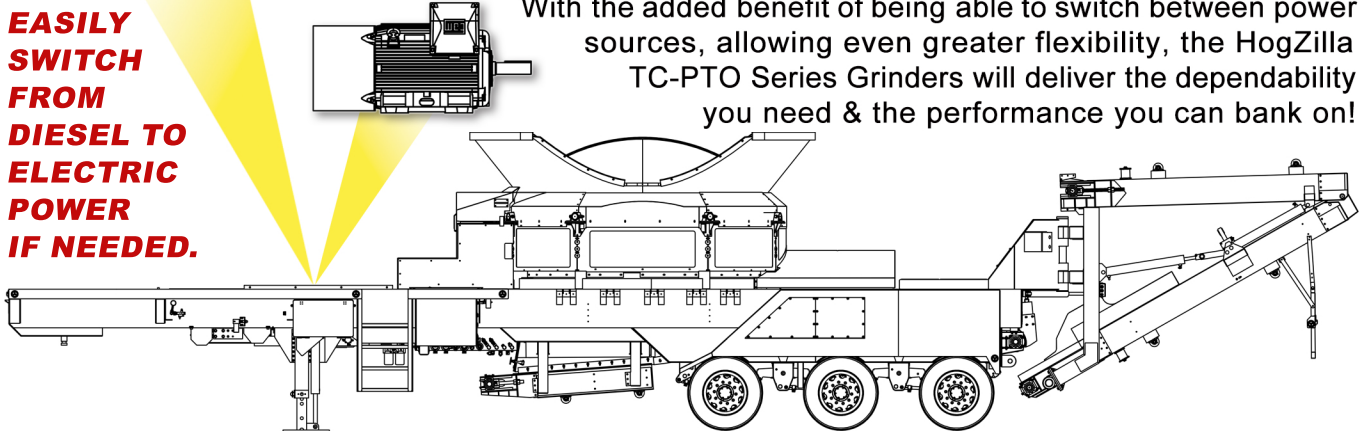

TC-PTO SERIES

POWER TAKE OFF (PTO) STYLE GRINDERS ARE SOLD LESS POWER UNIT. THE CUSTOMER IS TO SUPPLY THEIR OWN COMPLETE POWER UNIT AS NEEDED.

APPROXIMATE POWER UNIT REQUIREMENTS FOR STANDARD BASE MODEL*:

- 600HP minimum to 1200HP maximum
- Output shaft speed to drive rotor:
 - Combustion Engine Driven Power Unit
 - 1,250 RPM minimum to 1,400 RPM maximum
 - Electric Motor Driven Power Unit
 - 1,000 RPM minimum to 1,400 RPM maximum
- Closed loop hydraulic fluid power drive system to drive tub
 - 30GPM minimum to 35GPM maximum - 3,000 psi maximum
- Open loop hydraulic fluid power drive system to drive belly conveyor
 - 30GPM minimum to 35GPM maximum - 3,000 psi maximum
- Open loop hydraulic fluid power drive system to drive stacking conveyor
 - 30GPM minimum to 35GPM maximum - 3,000 psi maximum
- Open loop hydraulic fluid power drive system to cooler fan motors
 - 15GPM minimum to 20GPM maximum - 3,000 psi maximum
- 24 Volt / 95 Amp charging system to charge machine's batteries.

NOTE: A power take off (PTO) style grinder is less power unit and is subject to the purchaser selecting, connecting, and starting up a power unit that is compliant to their intended location and intended use. The purchaser is responsible for determining & achieving compliance to all regulatory issues that apply to their use of engines & powered equipment in their chosen areas.

***ACTUAL POWER UNIT REQUIREMENTS ARE SUBJECT TO POSSIBLE VARIANCES.**

Standard Features

- Remote Control
- Trougher Roller Conveyors
- Vulcanized Conveyor Belts
- Hydraulic Rod Puller

Optional Equipment*


- 60° Radial Stacking Elevator
- Auxiliary Hydraulic Power
- Bolt-In Tire Grinding Package
- Back-side Mill Deflector
- Weld-on & Bolt-on Tip Variations
- Rigid & Swing Hammer Variations
- Custom Fire Suppression Variations
- Custom Thrown Object Restraint Variations
- Mulch Color Attachment

***NOTE:** Additional options are available upon request. Custom variations may be available within the options upon request. Some options influence the capabilities, safety, performance, weight, & portability of the machine.



One loader or excavator operator can feed the HogZilla, controlling it by remote control and the optional 60° radial stacking elevator enables longer production runs.

The TCII variation has a hammermill assembly that can be changed to different swing diameters in the field enabling easy customization of the machine to match customers specific grinding needs. Maximum efficiency & productivity can be fine-tuned for any grinding application. It also offers a significant added benefit in future resale value since TCII grinders are the only machine that can be transformed to match future buyers individual preferences in mill diameter & depth of cut.

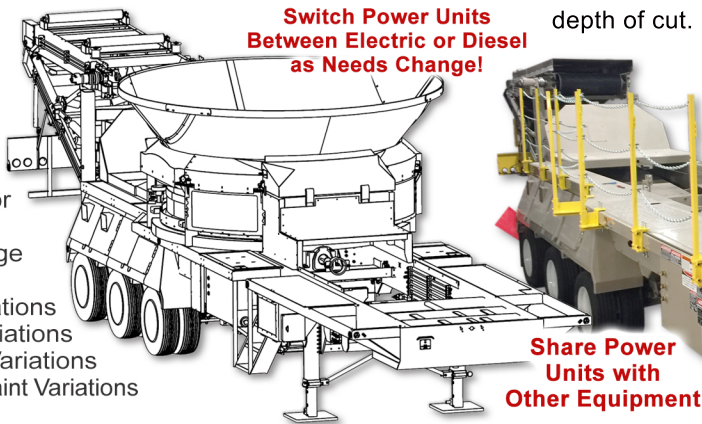

SPECIFICATIONS	TC-1564PTO (36)	TC-1564PTO (38)
Add Power Unit Requirements		
Hammermill Diameter	36"	38"
Screen Area	4374 sq. in.	4610 sq. in.
Screen Thickness	1" or 1 3/4"	1"
Hammer Weight	55 lbs.	70 lbs.
Hammer Number	24 - 48	24 - 48
Hammer Width	2.5"	3"
Rod Diameter	3"	3"
Tub Top Width (Standard)	15'	15'
Conveyor/Elevator Belts	48" & 42"	48" & 42"
Trans. Width	11' - 11"	11' - 11"
Trans. Length	56' - 3"	56' - 3"
Total Weight (Approximately)	70,000 lbs.	70,000 lbs.

Specifications subject to change without notice.
As improvements are made, actual product offered for sale may vary in design.

Estimated Maximum Production Range
(tons per hour*)

Yardwaste - 150-200
Stumps & Logs - 85-120
Pallet/Construction Waste - 75-120

*Any stated production information is estimated and is subject to variables that may fluctuate. Machine configurations include performance options that are changeable, and the actual materials being processed may differ resulting in actual production variations. Other production variables include user-based circumstances such as specific job site set up, material input procedures, & operational setting adjustments.

Check out HogZilla's Features, Quality and Workmanship, and you'll see why HogZilla Grinders are the Most Reliable, High Production Grinders in the world.



CW MILL EQUIPMENT CO., INC.
14 Commerce Dr., Sabetha, KS 66534
785-284-3454 or 800-743-3491 Fax: 785-284-3601
Web: hogzilla.com Email: hogzilla@cwmill.com

LETS CONNECT.