GRINDER
CRUSHER
SCREEN

FYREBX®

T5



The 500 gallon water delivery attachment built for skid steers and compact track loaders.

Built for: Firefighting, construction/mining, landscaping forestry/timber, utility companies & agriculture.

FYREBX T5 HEAVY DUTY - SKID STEER ATTACHMENT

FYREBX T5 HD is patented compact track loader skid steer attachment that quickly deploys **500 gallons of water** across terrain that many trailers and other equipment are unable to reach. It exceeds current utility fire safety requirements for fuel reduction.

Key Specifications

Capacity
500 gallons (1,892 liters) of water/ water-soluble product

Weight
1,200 lbs (empty)
5,300 lbs (full)


Compatibility
Attaches to compact track loaders 11,500 lbs or larger

Outer Dimensions (Wide x Tall x Deep)
90" x 54" x 90"

Jet Agitation
Circulation up to 250 gal per min

Seeding
With hydroseed LANDBX upgrade. Pellet hydro-mulch material only

Spraying
From nozzle(s), hose, or monitor gun (Monitor gun not included in base model)

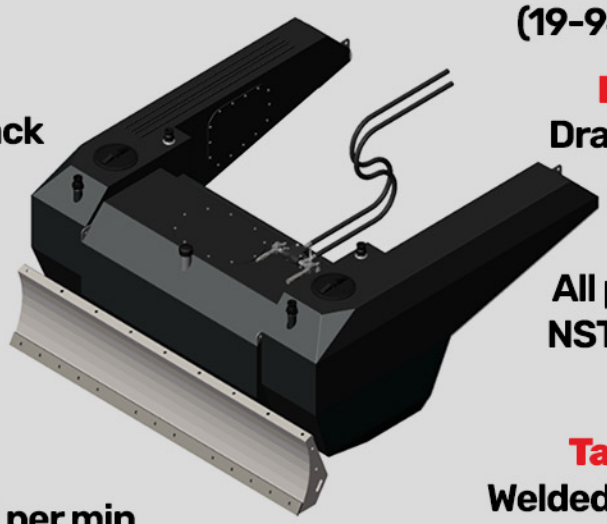

Standard Features

Air-Aspirated Nozzle
Will produce 10:1 expansion = 5,000 gal of foam

Hydraulic Water Pump
Flow rate 5 gpm to 250 gpm (19-946 lpm) of water

Draft Capability
Draft fill using hider axillary pump

Plumbing
All plumbing NPT or NST. Two accessory receivers: 2"

Tank Constrution
Welded from 10, 12, and 14-gauge steel (approx. 3.4 mm to 1.9 mm thickness)

Baffles
One (1) effective long and two (2) transverse







Additional Features



Submerged Hydraulic Water Pump
Water flow rate range: 1-250 gpm depending on hydraulic flow & nozzle type. Pressure range: 40-145 psi depending on hydraulic flow and nozzle type. Can be increased to 150 psi with a specialized pump. (See owner's manual for the cart)

Hydraulic Flow Control
Can safely be operated from #5 (8 gpm/ 30.3 lpm) to #7 (10 gpm/38 lpm) on the flow control to achieve desired water psi and gpm

Interior Finish
3m scotch coat - cathodic protection

Exterior Finish
Durable powder-coated paint

Compact Track Loader Attachment Plate
1/4" (6.35 mm) Steel rated at 30,000 lbs

Forklift Skids
1/4" (6.35 mm) steel.

Lift Points
Four (4) lift points for helicopter or crane: rated to 6,000 psi/hook 24k psi total

Multiple Accessories and customizations available







FYREBX®
+1-530-255-4431
info@fyrebx.com
www.fyrebx.com
2000 Frontier Trail - Unit C Anderson, CA 96007

+1-770-433-2670
sales@grindercrusherscreen.com
www.grindercrusherscreen.com
1772 Corn Rd, Smyrna GA 30080

GRINDER CRUSHER SCREEN