GRINDER CRUSHER SCREEN

LANDBX®

T3



The 300 gallon of Hyroseeding power attachment built for skid steers and compact track loaders.

Built for: Firefighting, construction/mining, landscaping forestry/timber, utility companies & agriculture.

GRINDER CRUSHER SCREEN

LANDBX T3 - SKID STEER ATTACHMENT

300 gallons of hydroseeding power for your compact track loader. Crafted with cutting-edge technology, our hydroseedingattachment promises durability and performance, making your work faster and easier. If you're ready to experience the next level of farming innovation with FYREBX, it's time to consider the skid steer agricultural attachment that'll transform your agricultural operations in ways you never thought possible.

Key Specifications

Capacity
300 gallons (1,136 liters) of water/ water-soluble product

Weight
850 lbs (empty)
3,200 lbs (full)


Compatibility
Attaches to compact track loaders 7,500 lbs or more

Outer Dimensions (Wide x Tall x Deep)
82.75" x 40.5" x 61"

Jet Agitation
Circulation up to 250 gal per min

Seeding
Pellet hydro-mulch material only

Dispersal
From nozzle(s), hose, or monitor gun (Monitor gun sold separately). 50' hose plus hydroseed nozzle included

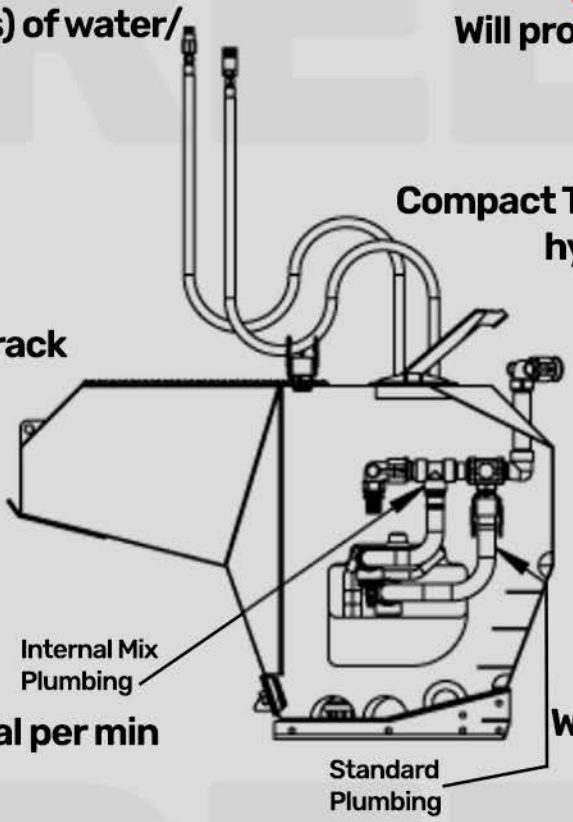

Standard Features

Air-Aspirated Nozzle
Will produce 10:1 expansion = 5,000 gal of foam

Hydraulic Flow
Compact Track Loader standard hydraulic flow required.

Draft Capability
Draft fill using hider axillary pump

Plumbing
All plumbing NPT or NST. Two accessory receivers: 2"

Tank Constrution
Welded from 10, 12, and 14-gauge steel (approx. 3.4 mm to 1.9 mm thickness)

Baffles
One (1) effective long and two (2) transverse







Additional Features



Submerged Hydraulic Water Pump
Water flow rate range: 1-250 gpm depending on hydraulic flow & nozzle type. Pressure range: 40-145 psi depending on hydraulic flow and nozzle type. Can be increased to 150 psi with a specialized pump. (See owner's manual for the cart)

Hydraulic Flow Control
Can safely be operated from #5 (8 gpm/ 30.3 lpm) to #7 (10 gpm/38 lpm) on the flow control to achieve desired water psi and gpm

Interior Finish
3m scotch coat - cathodic protection

Exterior Finish
Durable powder-coated paint

Compact Track Loader Attachment Plate
1/4" (6.35 mm) Steel rated at 30,000 lbs

Forklift Skids
1/4" (6.35 mm) steel.

Lift Points
Four (4) lift points for helicopter or crane: rated to 6,000 psi/hook 24k psi total

Multiple Accessories and customizations available







FYREBX®
+1-530-255-4431
info@fyrebx.com
www.fyrebx.com
2000 Frontier Trail - Unit C Anderson, CA 96007

+1-770-433-2670
sales@grindercrusherscreen.com
www.grindercrusherscreen.com
1772 Corn Rd, Smyrna GA 30080

GRINDER CRUSHER SCREEN