



KEY SPECS

Platform Height 33-ft 10.5-in / 10.33-m

Horizontal Outreach 19-ft 11-in / 6.06-m

Up and Over Reach 17-ft / 5.17-m

Platform Capacity

500-lb / 227-kg

KEY FEATURES

- Peak productivity with 33-ft 10.5-in platform height and 17-ft up and over reach.
- Steel hoods ensure added durability.
- Delivers industry-leading terrainability.
- Ideal for general contractors, steel erectors, painters, stadium construction and more.

ACCESSORIES & OPTIONS

- 1/2-in Airline to Platform
 43.5-lb / 19.7-kg Propage
- 43.5-lb / 19.7-kg Propane Tank
- AC Generator, 3500W
- Arctic Package¹ (Diesel)
- Cold Weather Start Kit (Diesel)²
- Hostile Environment Kit
- Light Packages
- Platform Mesh to Mid or Top Rail
 - Aluminum or Plastic
- Platforms
 - Drop Bar, 30 x 36-in,
 30 x 48-in, 30 x 60-in
 - Inward Self-Closing Swing Gate, 30 x 48-in, 30 x 60-in
- White Noise Alarm

STANDARD SPECIFICATIONS

Performance

Platform Height 33-ft 10.5 / 10.33-m Horizontal Outreach 19-ft 11-in / 6.06-m Up and Over Height 17-ft / 5.17-m

Swing 355 Degrees Non-Continuous

Platform Capacity 500-lb / 227-kg
Platform Rotator 180 Degrees Hydraulic

4-ft / 1.22-m

Range of Articulation 139 Degrees (+79, -60)
Weight* 10,175-lb / 4,615-kg
Max. Ground Bearing Pressure 62 psi / 4.3 kg/cm²

Drive Speed (4WD)

3.1 mph / 4.98 km/h

Tilt Cut Out

4 Degrees

Gradeability (4WD) 45%
Turning Radius Inside 5-ft / 1.52-m
Turning Radius Outside 13-ft / 3.96-m

Engine

Dual Fuel Engine – PSI/GM L4 EFI 28.7 hp / 21.4 kW
Diesel Fuel – Kubota D1105 24.8 hp / 18.5 kW
Fuel Tank Capacity 13 gal / 49.21 L

Tires

Standard Foam Filled, 9x20

Optional Foam Filled Non-Marking, 9x20 Foam Filled Turf & Sand, 33x12

Solid, 7x18

Solid Non-Marking, 7x18

Hydraulic System

Capacity 20.6 gal / 77.9 L Auxiliary Power 12V DC

STANDARD FEATURES

- 4 Degree Tilt Alarm/ Indicator Light
- 4-ft (1.22-m) Articulating Jib
- 12V-DC Auxiliary Power
- 110V-AC Receptacle in the Platform
- All Motion Alarm
- Cast Aluminum Control Box
- Center Storage Tray
- ClearSky Smart Fleet™ Hardware (CS550)

- Control ADE® System
- Glow Plugs (Diesel Engines)
- Gull-Wing Steel Turntable Hoods
- Horn
- Hourmeter
- Hydrostatic Drive
- LED Motion/Amber Beacon (CS550)
- Lifting/Tie Down Lugs
- Load Sensing System

- Oscillating Axle
- Platform Console Machine Status Light Panel**
- Proportional Controls
- Rapid Replaceable Platform with Self-Closing Gate
- SkyGuard SkyLine™
- Swing-Out Engine Tray
- USB-A and USB-C Charger

*Certain Options or Country Standards Increase Weight.

Includes Arctic Hydraulic Hoses (Drive and Steer Only) and Main Boom Cable, Arctic Hydraulic Oil, Extreme Cold Engine Oil, Antifreeze, Fuel Conditioner, Engine Block Heater, Battery Blanket, Glow Plugs, Hydraulic Tank Heater, and Oversized Footswitch.
 Includes Engine Block Heater, Battery Heater, Oil Tank Heater.

^{**}Provides Indicator Lights at Platform Control Console for System Distress, Low Fuel, Degree Tilt Light and Foot Switch Status.

340AJ ARTICULATING BOOM LIFT

BOOM LIFT




DIMENSIONS

REACH DIAGRAM

All dimensions are approximate






A. Platform Width 30-in / 0.76-m
B. Platform Length 60-in / 1.22-m
C. Machine Width 6-ft 4-in / 1.93-m
D. Tailswing 2-in / 5.08-cm
E. Machine Height 6-ft 7-in / 2-m

F. Machine Length 18-ft 2-in / 5.52 m 13-ft 2-in / 4.02-m with Jib Stowed

G. Wheelbase 6-ft 2-in / 1.87-cm
H. Ground Clearance 10-in / 23.7-cm

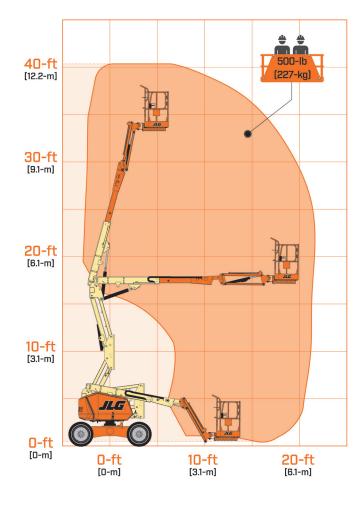



We provide coverage for one (1) full year, and cover all specified major structural components for five (5) years. Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification. This machine meets or exceeds applicable ANSI and CSA requirements based on machine configuration as originally manufactured for intended applications. Please reference the serial number plate on the machine for additional information.



JLG INDUSTRIES, INC.
Toll-free US 877-JLG-LIFT
JLG.com

An Oshkosh Corporation Business