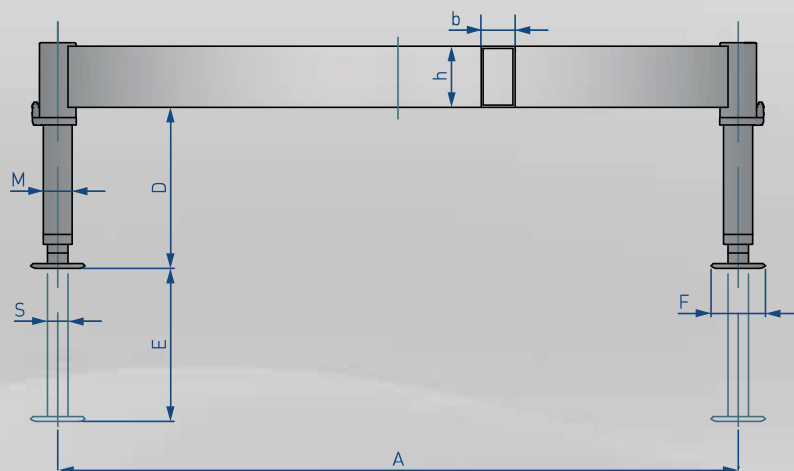
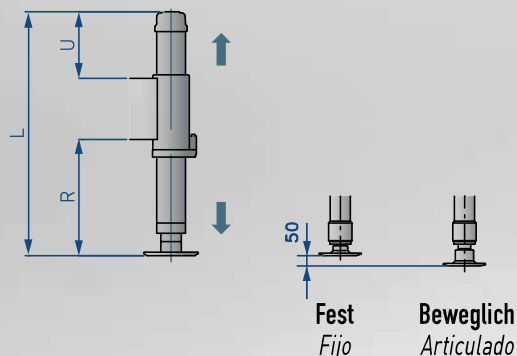



K-System für Höhenverstellung
K-Sistema de regulación en altura


Kran Grúa	daN MAX	Mod.	Abmessungen Dimensiones (mm)										Eigengewicht Peso (kg)	Zubehör Accesorios				
			A	h x b	D (R max)	E	F	M	S	R min	U max	L		1	2	3	4	5
2-4	2,400	ML-F K	1,800	120 x 80	430	330	150	70	40	200	240	560	60	o	o	o	o	--
		ML-F / L K			500	400					310	630	62	o	o	o	o	--
4-10	3,000	0 F K	2,000	120 x 80	500	400	150	70	40	200	310	630	80	o	o	o	o	--
10-23	6,300	1 F K	2,000	180 x 100	510	450	160	85	60	240	300	720	125	o	o	o	o	--
		1 F / L K			610	550					400	820	130	o	o	o	o	--
18-35	8,250	2 F / S K	2,300	200 x 100	450	400	200	95	60	200	260	660	170	•	o	o	o	--
		2 F K			600	550					410	810	180	•	o	o	o	--
		2 F / L K			700	650					510	910	185	•	o	o	o	--

Manuell schwenkbare Stützzyylinder Cilindros giratorios manuales

Kran Grúa	 daN MAX	Mod.	Abmessungen Dimensiones (mm)							45° Standard Estándar	Eigengewicht Peso [kg]	Zubehör Accesorios				
tm			A	h x b	D	E	F	M	S	90° Auf Anfrage A petición		1	2	3	4	5
2-4	2,400	ML-F GIR	1.800	120 x 80	480	330	150	70	40		60	○	○	○	○	--
4-10	3.000	0 F GIR	2.000	120 x 80	480	330	150	70	40		75	○	○	○	○	--
10-23	6.300	1 F GIR	2.000	180 x 100	590	450	160	85	60		125	○	○	○	○	--
18-35	8.250	2 F / S GIR	2.300	200 x 100	530	400	200	95	60		170	●	○	○	○	--
		2 F GIR			680	550					180	●	○	○	○	--

o Auf Anfrage A petición • Standard Estándar

Zubehör Accesorios				
1 - Doppeltwirkende Sperrventile 1 - Válvulas dobles	2 - Beweglicher Stützteller 2 - Plato articulado	3 - Zwei-Seiten-Steuerung 3 - Mandos bilaterales	4 - Kolbenstangenverlängerung 4 - Prolonga vástago	5 - Schlauchtrommeln 5 - Arrollador de tubo
			 ML - 0 = 100 mm 1 - 2 = 120 mm	