




FW260 - FW460


Prodotti non adatti a sollevamento persone
Products not suitable for lifting people

In conformità EN 2006/42/CE - EN 14492-2 - EN 12100-1-2
 According to EN 2006 42 EC - EN 14492-2 - EN 12100-1-2



Modelli Models	FW260	FW300	FW360	FW460
Tiro 1° strato / 1st line pull	2600	3000	3600	4200
Tiro ultimo strato / Last line pull	1860	2120	2500	2800
Strati fune / Rope layers	5	5	5	5
Ø fune / Rope size	12	13	14	15
Lunghezza fune / Rope length	74	70	62	58
Velocità fune / Rope speed	30	29	28	26
Peso / Weight	120	129	136	140
Portata max / Max flow	65	65	65	65
Pressione / Pressure	170	175	180	190
Motore / Motor	100	100	100	100
Coppia motore / Engine torque	216	216	216	216
Coppia al tamburo Max torque on the drum	5230	5350	5400	5453
Contropress. max sulla linea di ritorno Max back pressure on return line	2	2	2	2
Rapporto di riduzione Gear ratio	26.8	27.0	27.2	27.5
Coppia frenante Braking torque	354	358	364	368
Pressione completa apertura freno Full opening brake pressure	33	33	33	33

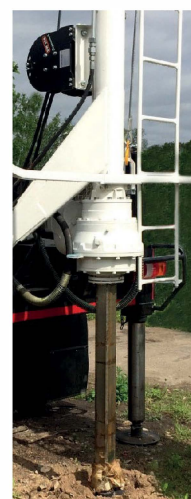

**Argano Ferrari 2
 su applicazione
 perforazione Russia
 Ferrari 2 winch Russian
 drilling application**



Rotazione standard in senso orario
Standard rotation clockwise



Dimensioni Dimensions	FW260	FW300	FW360	FW460
A	213	213	213	213
B	498	498	498	498
Ø C	250	250	250	250
D	441	441	441	441
E	415	415	415	415
Ø F	400	400	400	400
G	245	245	245	245
H	360	360	360	360
Ø I	19	19	19	19



Barcelona
 938498388
Valencia
 961344538

Madrid
 918951758
Vitoria
 945365601

www.transgruas.com
info@transgruas.com