




PK 27002 Performance			
Technical Specifications (DIN 15018 H1-B3)			
Max. lifting moment	26.9 mt/264.0 kNm	194650 ft.lbs	
Max. lifting capacity	8500 kg/83.4 kN	18740 lbs	
Max. hydraulic outreach	21.3 m	69' 11"	
Max. outreach (with fly-jib)	29.3 m	96' 2"	
Slewing angle	400°		

PK 27002 Performance			
Standard crane			
Slewing torque	2.8 mt/27.0 kNm	19910 ft.lbs	
Outreach	8.1 m	26' 7"	
Stabilizer spread standard	5.6 m	18' 6"	
Stabilizer spread max.	6.6 m	21' 9"	
Fitting space required	0.96 m	3' 2"	
Width folded	2.5 m	8' 2"	
Max. operating pressure	315 bar	4568 psi	
Recommended pump capacity with RC- control and LS-system	from 80 l/min to 100 l/min	17.6 imp.gal./min to 22.0 imp.gal./min	21.1 US gal./min to 26.4 US gal./min
Dead weight standard crane	2802 kg	6180 lbs	

Applications shown in the leaflet do not always correspond to the standard specifications. Country-specific regulations must be considered for the crane installation.

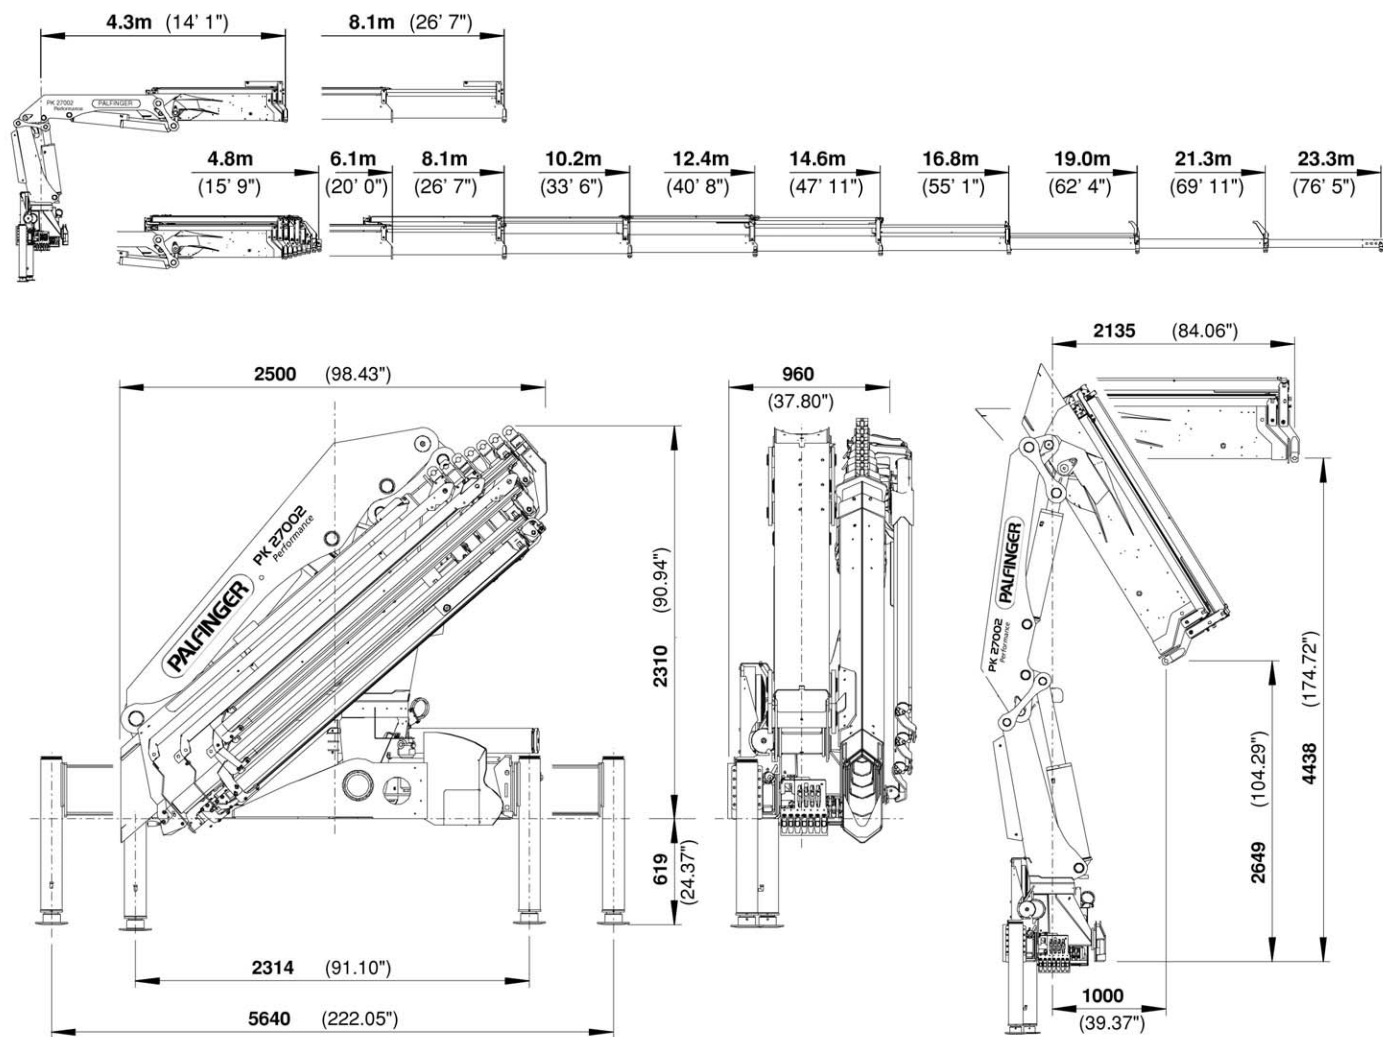

PERFECTION IN OUTREACH, MANOEUVRABILITY
AND FUNCTIONALITY



UNRIVALLED IN OUTREACH AND MANOEUVRABILITY →

WITH THE RELIABILITY OF A REAL
PALFINGER *PERFORMANCE* CRANE

Max. lifting capacities

PK 27002 Performance E			
Max. lifting capacities		6700 kg	14770 lbs
Outreach		Capacity	
hydraulic			
4.6 m	15' 1"	5200 kg	11460 lbs
6.0 m	19' 8"	3760 kg	8290 lbs
7.9 m	25' 11"	2660 kg	5860 lbs
10.1 m	33' 2"	1950 kg	4300 lbs
12.2 m	40' 0"	1520 kg	3350 lbs
14.4 m	47' 3"	1250 kg	2760 lbs
16.7 m	54' 9"	1070 kg	2360 lbs
manual			
18.8 m	61' 8"	890 kg	1960 lbs
21.0 m	68' 11"	750 kg	1650 lbs
23.0 m	75' 6"	650 kg	1430 lbs

