

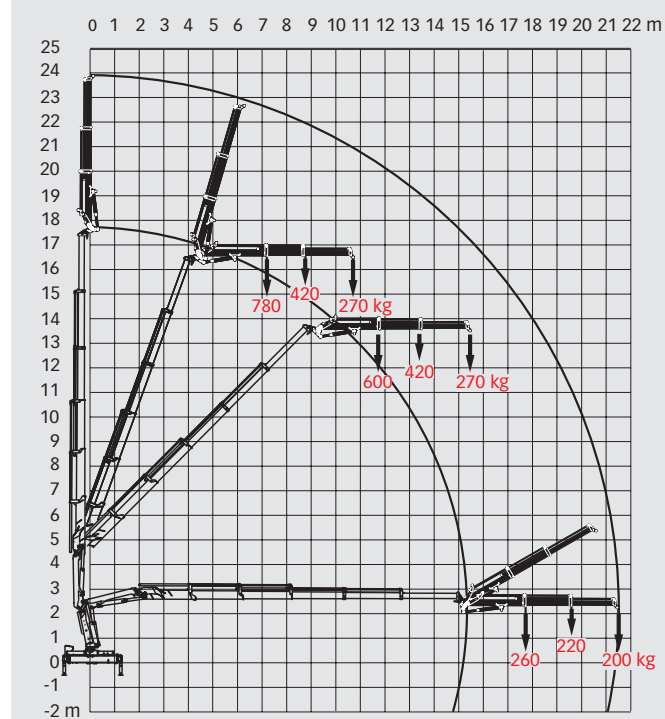
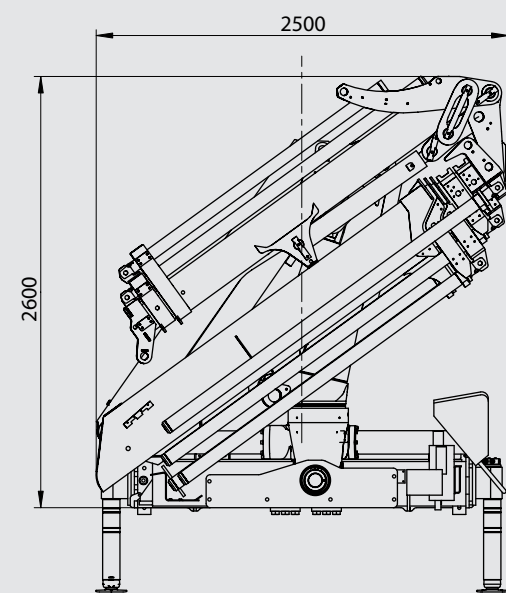


HIAB XS 166 Basic data

> HIAB XS 166 E-5 HiPro jib 45X-2

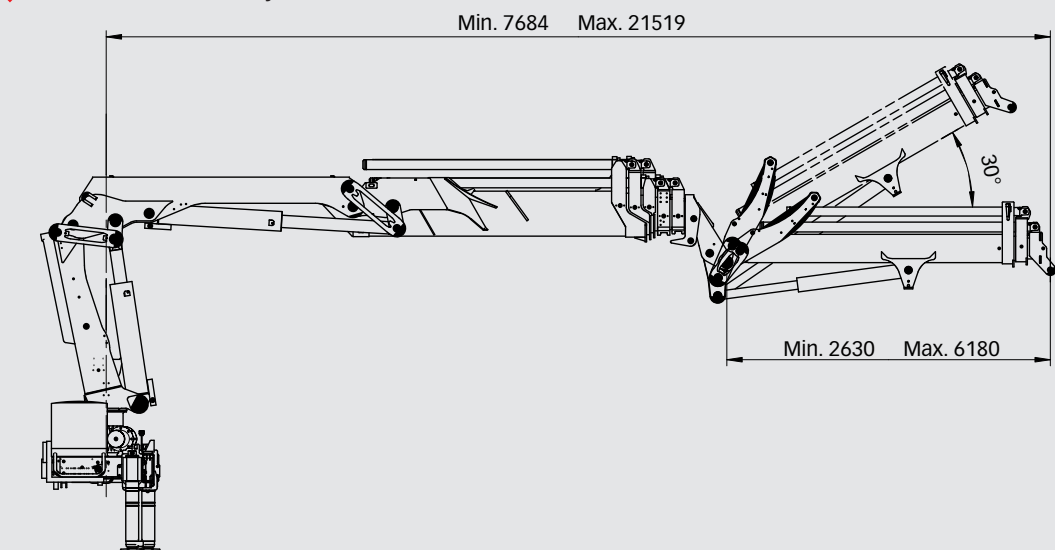

HIAB XS 166 Range 13-17 tm

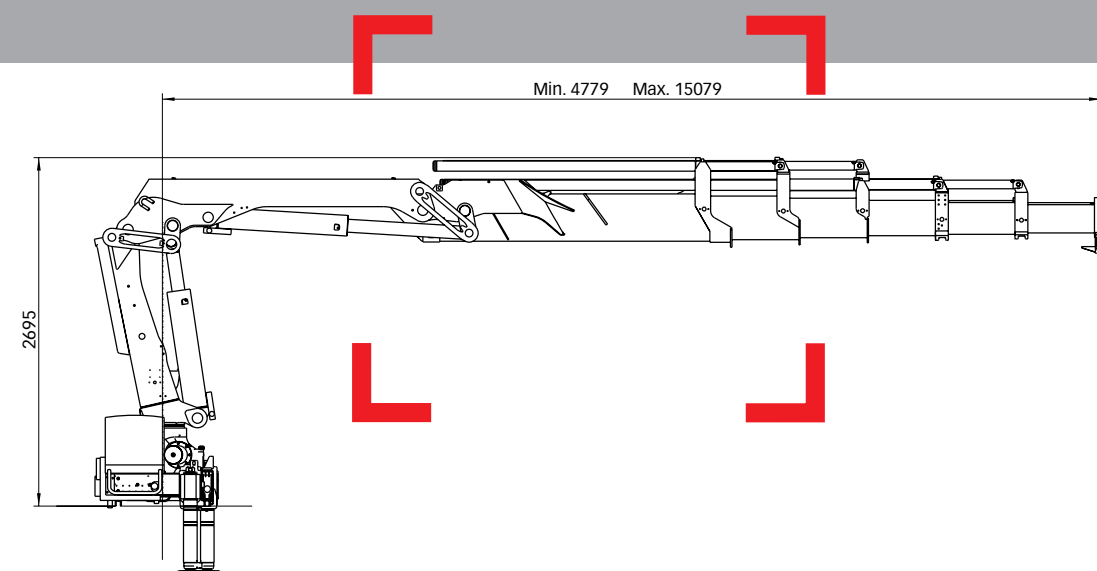

Basic data

Disclaimer
Hiab cranes have been built to meet the highest standards of safety and service life and have been thoroughly tested. Strength calculations for this model have been carried out in accordance with EN13001. Hiab's certified Quality Assurance System complies with the ISO 9001. Some of the items in our literature may be extra equipment. Certain applications may require an official permit. We reserve the right to change technical specifications without prior notice. Hiab cranes produced for EU-countries are CE-marked and comply with the European Standard EN 12999.

BD-166-EN-EU_060224

www.hiab.com



HIAB
 XS
 166
 Basic data

>
 Technical data

Max. lifting capacity (kNm)					157
Outreach - hydraulic extensions (m)					15.1
Outreach - manual extensions (m)					-
Outreach - jib (m)			-		21.5
Outreach / Lifting capacity, standard (m / kg)					2.7 / 5900
					4.7 / 3400
					6.5 / 2300
					8.5 / 1680
					10.5 / 1300
					12.7 / 1040
					14.9 / 880
Outreach / lifting capacity, with jib (m / kg)			-		17.9 / 260
			-		19.6 / 220
			-		21.5 / 200
Slewing angle					406°
Height in folded position (mm)					2600
Width in folded position (mm)					2500
Installation space needed (mm)					962
Weight - "standard" crane without stabilizers (kg)					2330
Weight - stabilizer equipment (kg)					255 - 395
Weight - jib (kg)			-		380

E-5 HiPro

>
 HIAB XS 166 E-5 HiPro

