




7131C
NEW AGE

7131C

Ferrari
PASSION FOR LIFTING

7131C Technical data

	Lift Moment	Slewing Angle	Working pressure	Oil tank capacity	Max Oil flow	Max lifting height	Standard crane weight
	tm	°	bar	l	l/m	m	kg
A2	12,0	425	290	130	60	12,2	1820
A3	11,6	425	290	130	60	14,4	1935
A4	11,2	425	290	130	60	16,5	2040
A5	10,8	425	290	130	60	18,8	2140
A6	10,5	425	290	130	60	21,0	2230
A3J2	-	425	290	130	60	19,9	2245
A4J2	-	425	290	130	60	22,0	2350

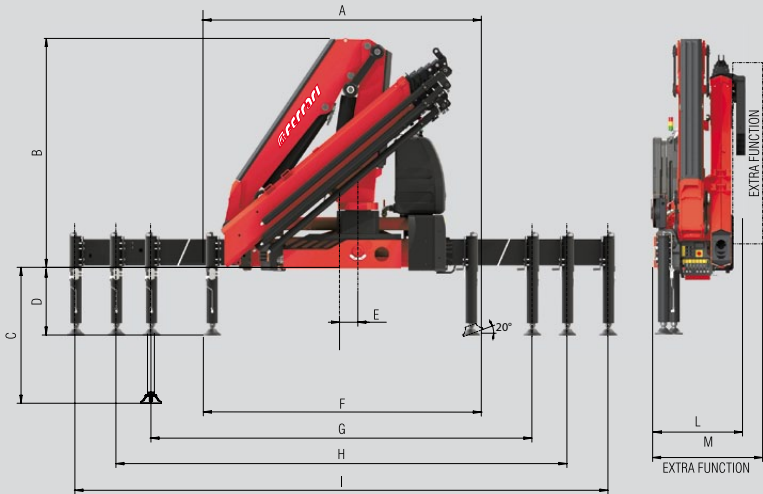


	A2	A3	A4	A5	A6	A3J2	A4J2
A	2450	2450	2450	2450	2450	2450	2450
B	2330	2330	2330	2330	2330	2450	2500
C	1362	1362	1362	1362	1362	1362	1362
D	670	670	670	670	670	670	670
E	160	160	160	160	160	160	160
F	2445	2445	2445	2445	2445	2445	2445
G	4200	4200	4200	4200	4200	4200	4200
H	5400	5400	5400	5400	5400	5400	5400
I	6600	6600	6600	6600	6600	6600	6600
L	817	817	817	890	890	940	940
M	960	960	960	1020	1020	-	-



*) Theoretical lifting capacity
-) Max lifting capacity

Standard

- Designed in accordance with EN12999+EN13849
- Design class: HC1-HD4
- Cross controls
- Load limit device
- Flanged valves
- Oil tank
- Manually extendable stabilizers
- Internal stabilizer pipes
- Fixed stabilizer cylinders
- Swivel stabilizer foot
- Centralized greasing system
- EQS Extension Quick System
- SDV Smooth Descent Valve
- Red Power
- A Class - Crane Control System (CE)
- LED panel - Human Machine Interface (CE)



Recommended truck M.T.T. ton 12 - G,V.W. ton 12

With 3 tm fly Jib



One model,
many applications

Brick handling
application



Waste handling
application



Construction
application



Fence posts, poles
and landscaping
application



With winch

