

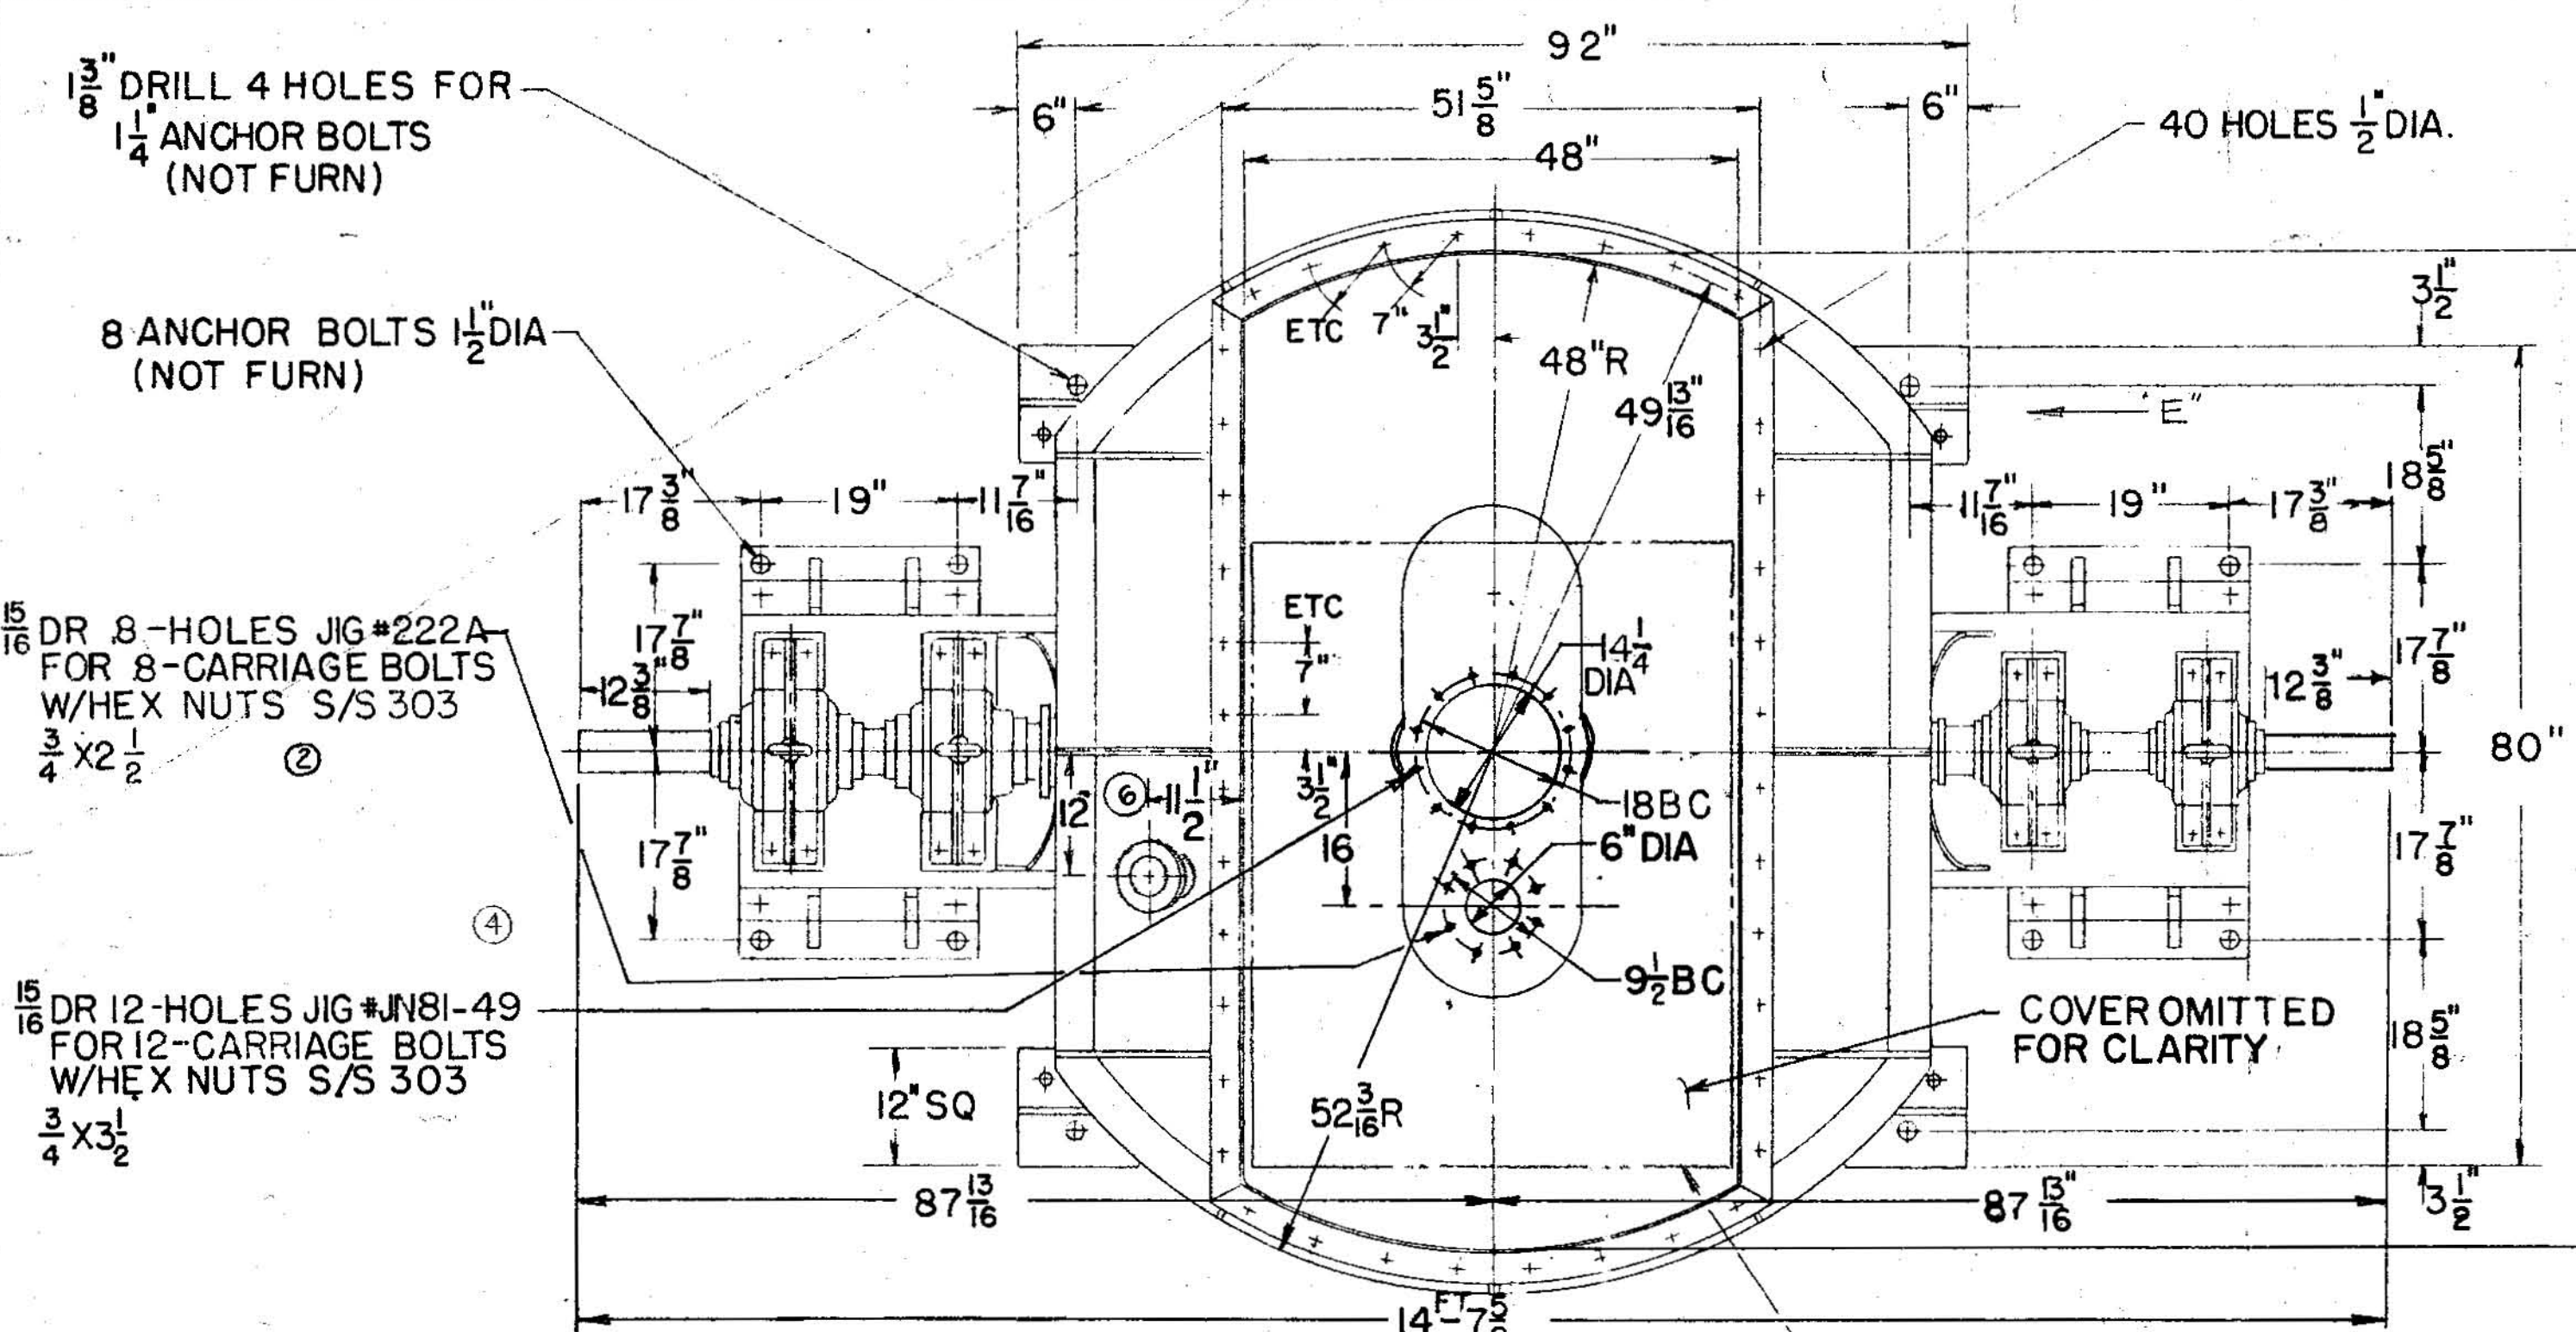
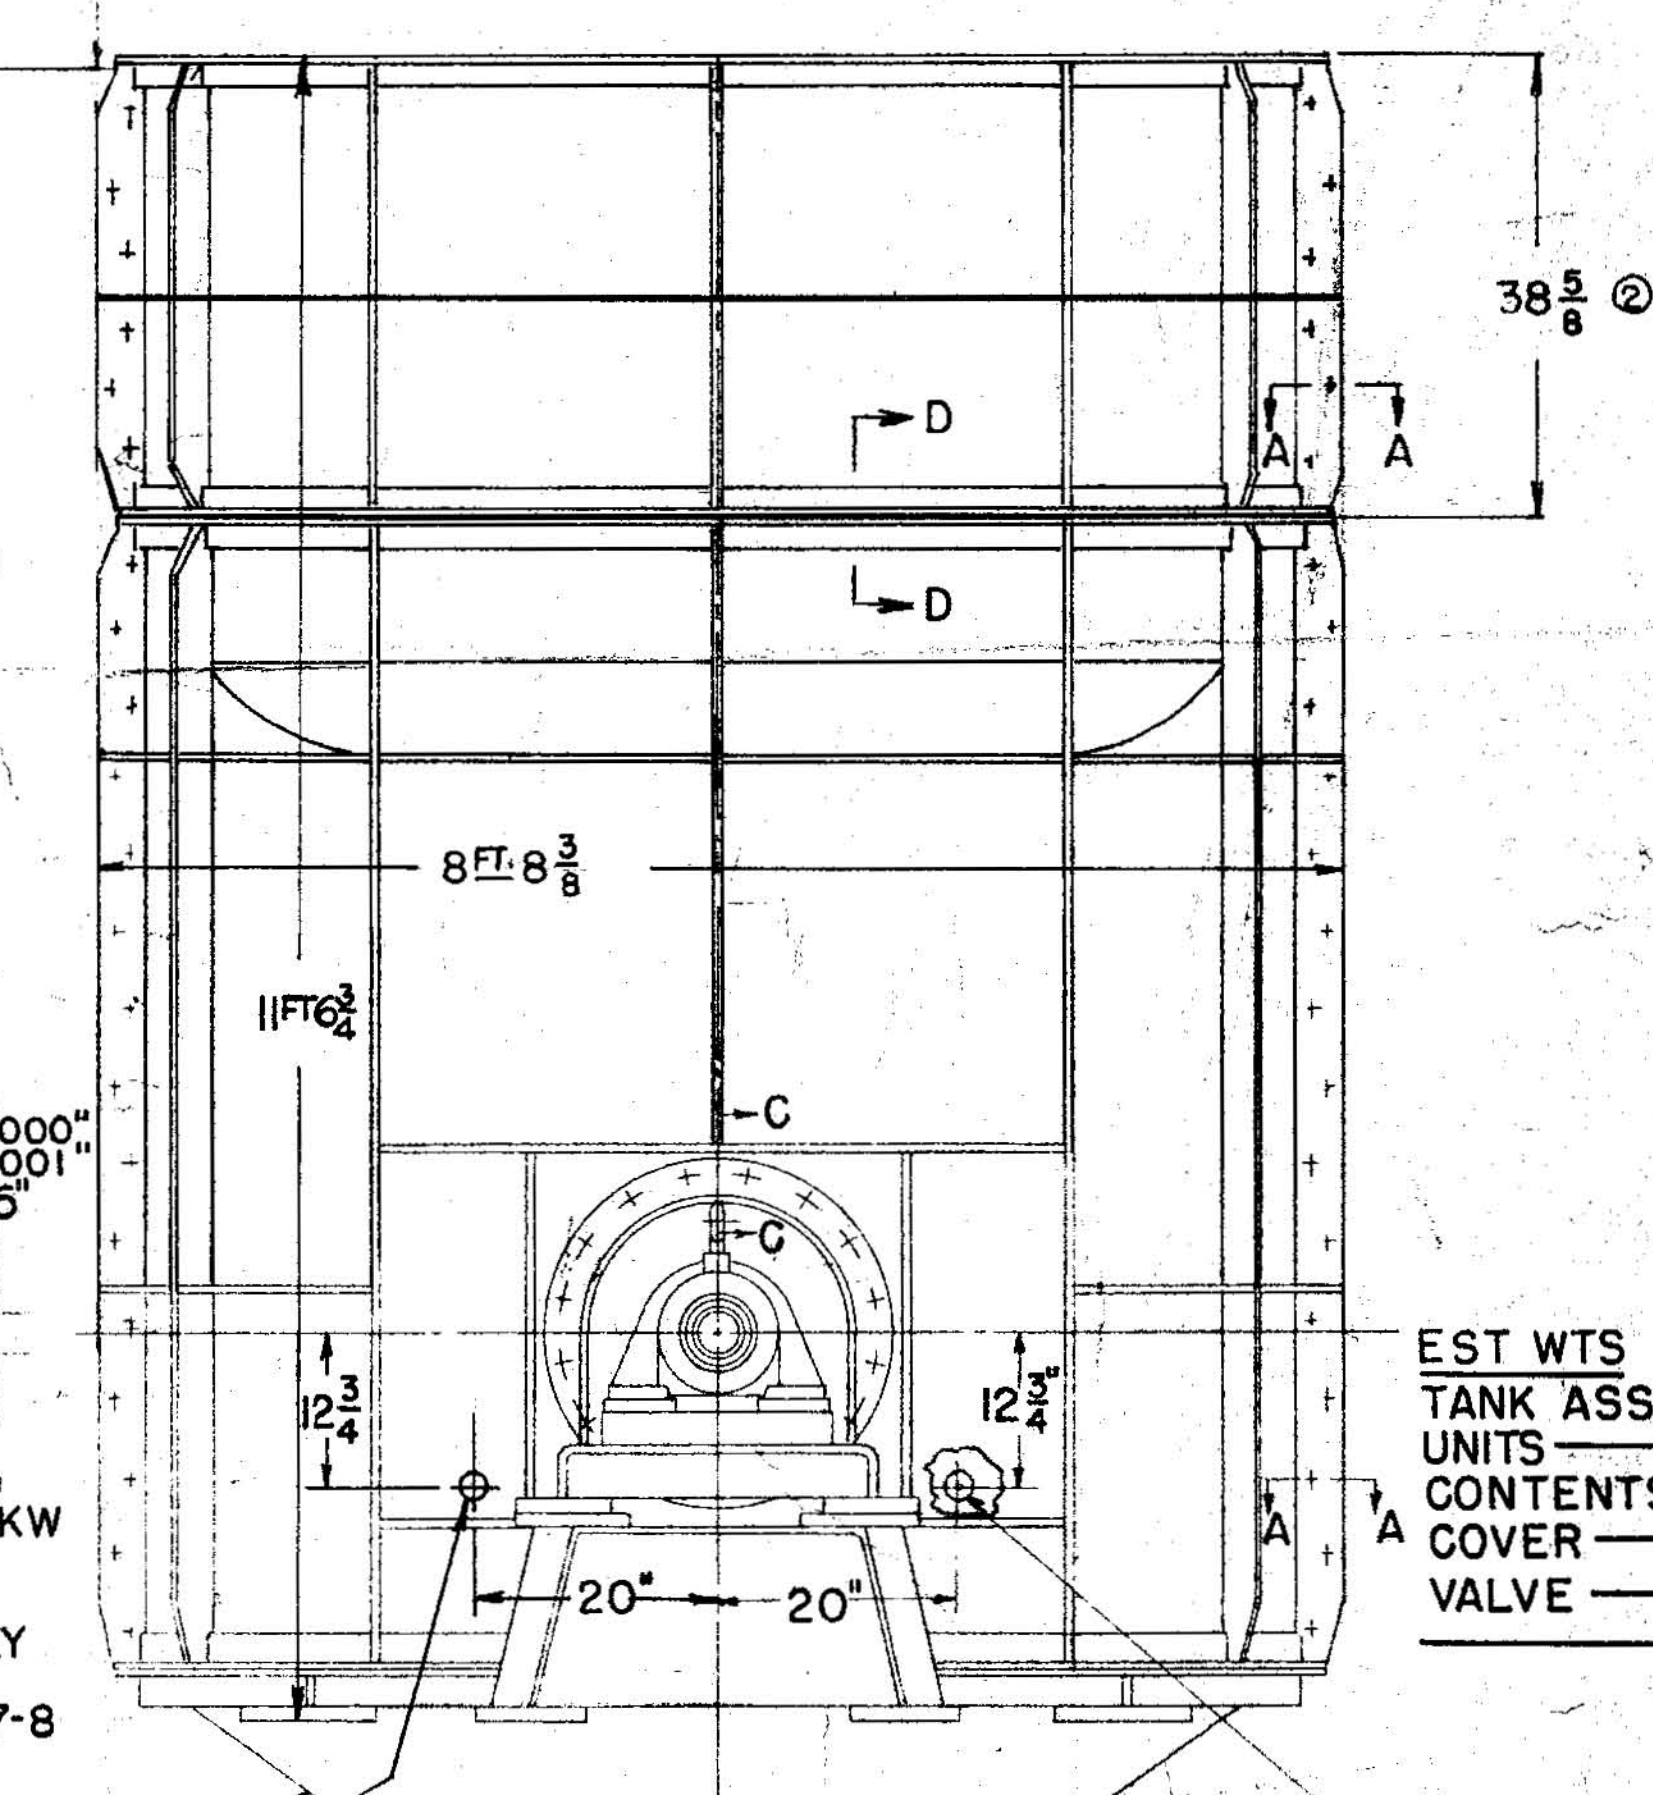
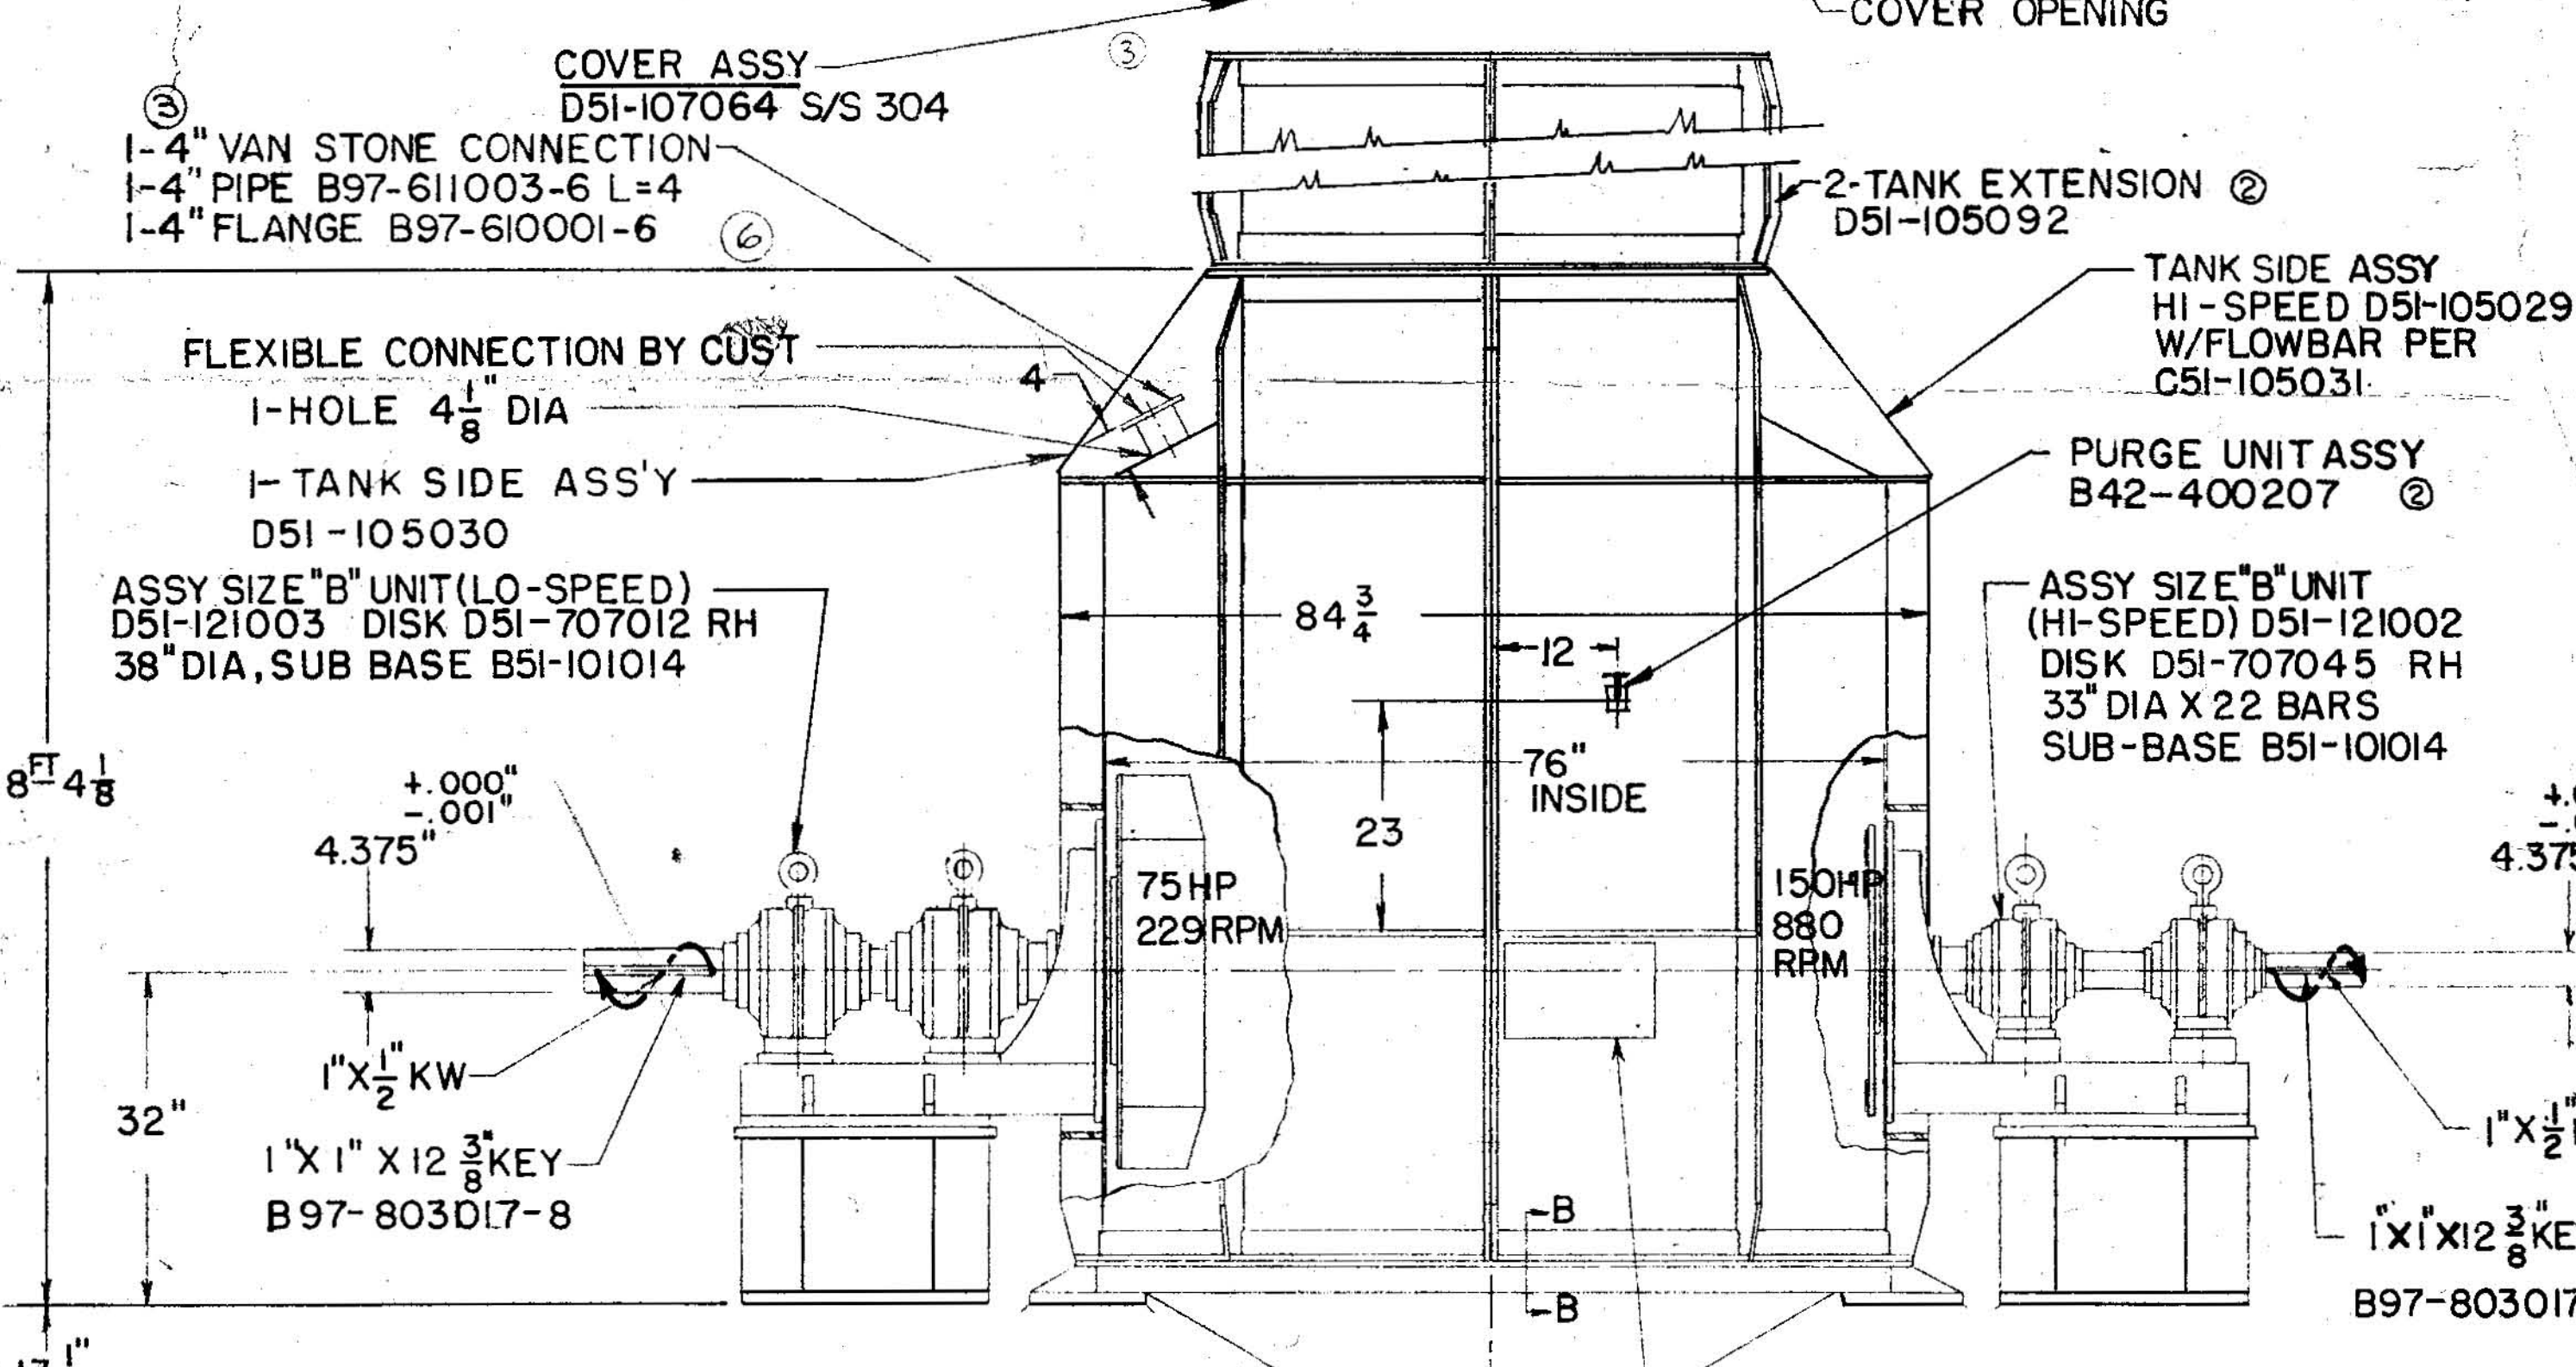
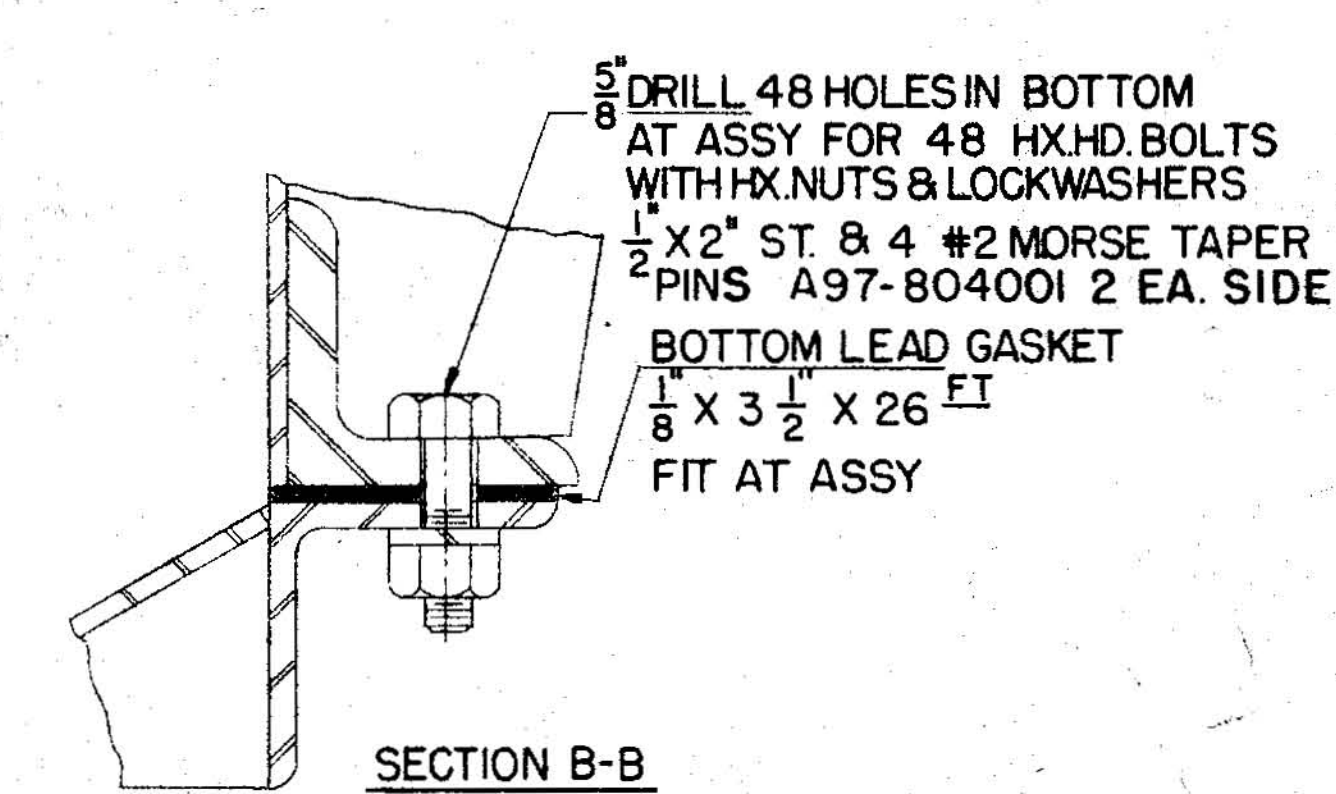


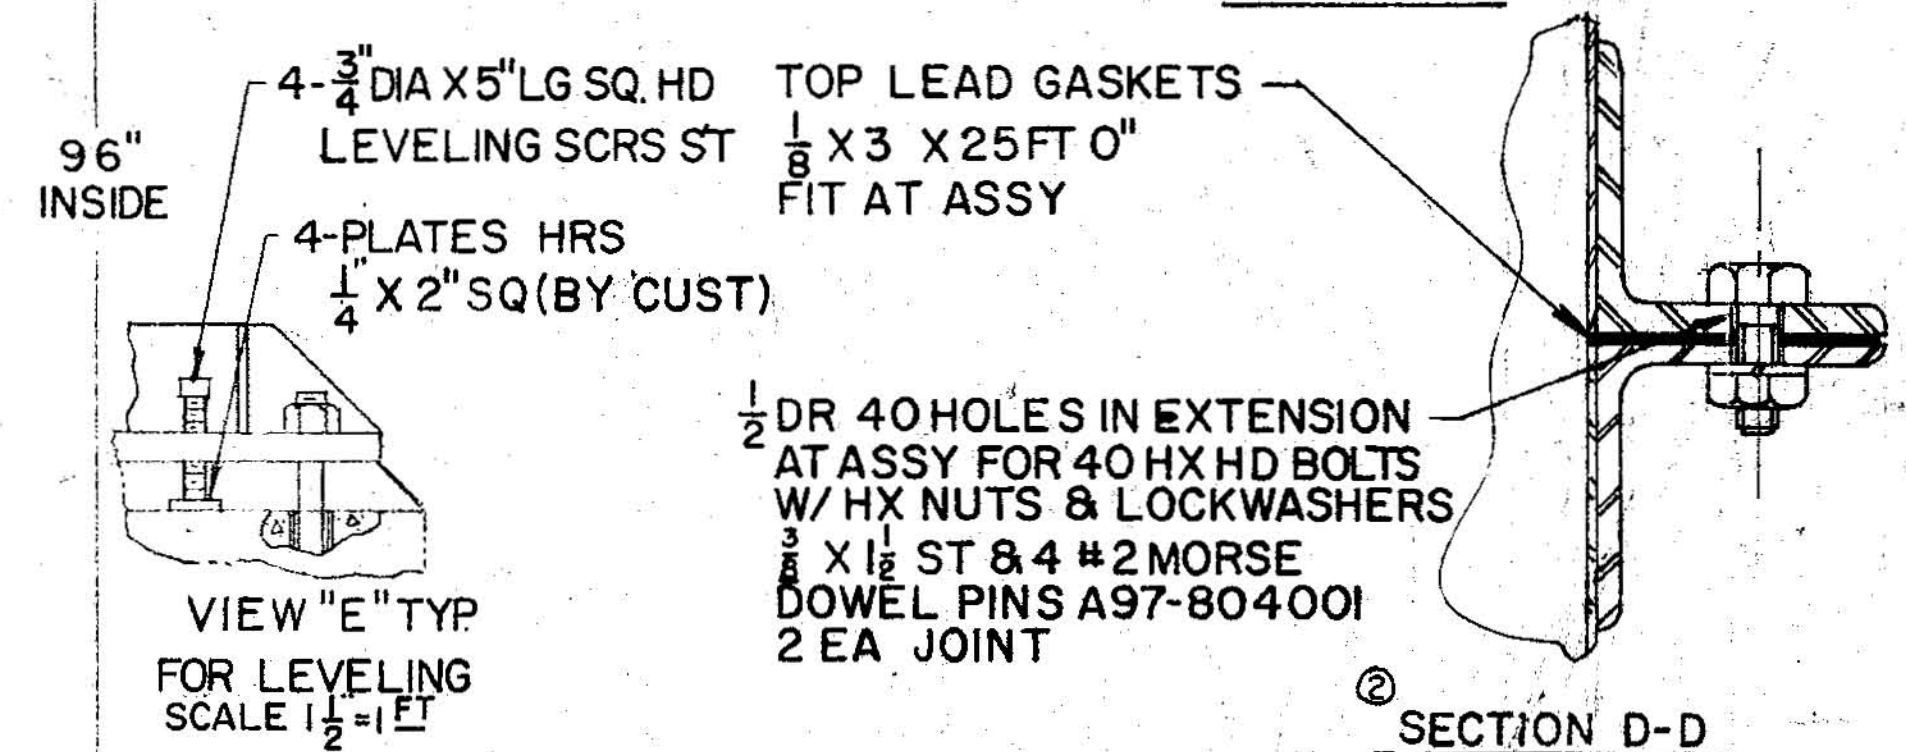

- 32 CARRIAGE BOLTS S/S 303 1/2 X 1 3/4 A50-811001-4
- 32 WASHERS HRS A51-811001
- 32 "DUALOCK" LOCKNUTS ST CD PL STD TYPE 1/2 -13

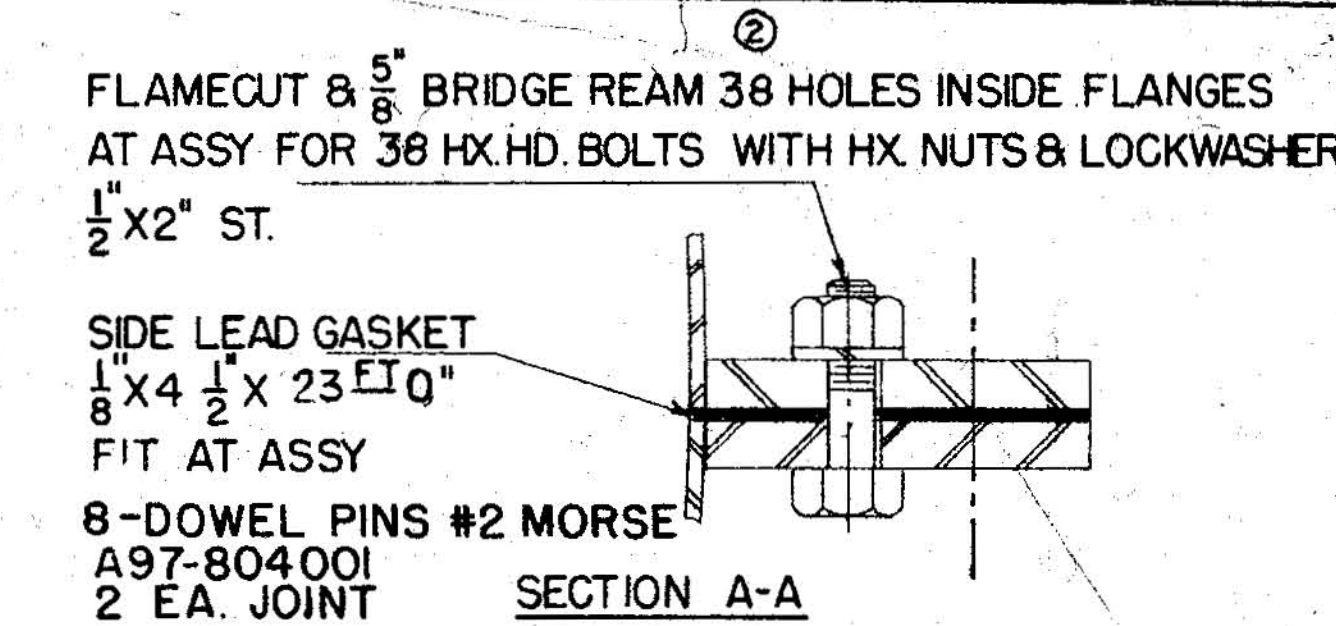

- HI-SPEED DRIVE**
150 HP, 880 RPM, GE MOTOR TYPE "M" SQ CG INDUCTION 550V, 3PH, 60CY, FR 6325S A51-912064 B/P SH2 FAST'S CPLG FORGED STEEL # 4 KOPPERS CO INC ROTOR HALF BORE 4.372 ± .001 1 X 1/2 KW MOTOR HALF BORE 2.373 ± .001 DIA 5" X 5" 1/8 KW
- LO-SPEED DRIVE**
75HP 880 RPM, GE MOTOR SQ CG INDUCTION OPEN DRIP PROOF 550V, 3PH, 60CY, FR 8143 A51-912064 B/P SH1
- V BELT DRIVE**
MOTOR SHEAVE 9.4" PD TYPE "A1" SG HUB TYPE "J" BORE FOR 3.375 ± .001 SHAFT 7/8 X 7/16 KW DISK SHEAVE 36.0" PD TYPE "A3" SG HUB TYPE "M" BORE FOR 4.375 ± .001 SHAFT, 1 X 1/2 KW 12- C-180V BELTS FOR 54.1" C-C

EST WTS	
TANK ASSY	4,250 LBS
UNITS	4300 "
CONTENTS	22,500 "
COVER	1,020 "
VALVE	300 "
TOTAL	32,370 "

PAINTING-
SPRAY O.S. TANK W/ONE COAT PRIMER

PASSIVATE UNPAINTED S/S SURFACES IN CONTACT W/STOCK ALSO S/S TANKS TO BE PASSIVATED IN THE WELD AREAS ONLY ON THE OUTSIDE OF TANKS PRIOR TO PRIME PAINTING

6	1 1/2" WAS 9" FLG WAS P55-7-62 MRM	
5	HL-281 WAS HL-279	6-6-62 W.S.
4	V-BELT DRIVE CHG JIG #	5-3-62 JF
3	ADD B/P N'S, CHG	
2	REDESIGN COV ASSY	4-25-62 AJH
1	RELOC'D DRAIN, ROTATE 12" VALVE	3-9-62 JF-S
2	ADD COVER & EXTENSION	
1	ADD MOTOR INFO	2/FEB/62 PGB
	ALTERATIONS	DATE BY
SUPERSEDES		SUPERSEDED BY


JONES

APPROVED FOR CONSTRUCTION

CUSTOMER'S ORDER NO. 13591

OUR ORDER NO. 145725

APPROVED BY: *Gen. B. Green*

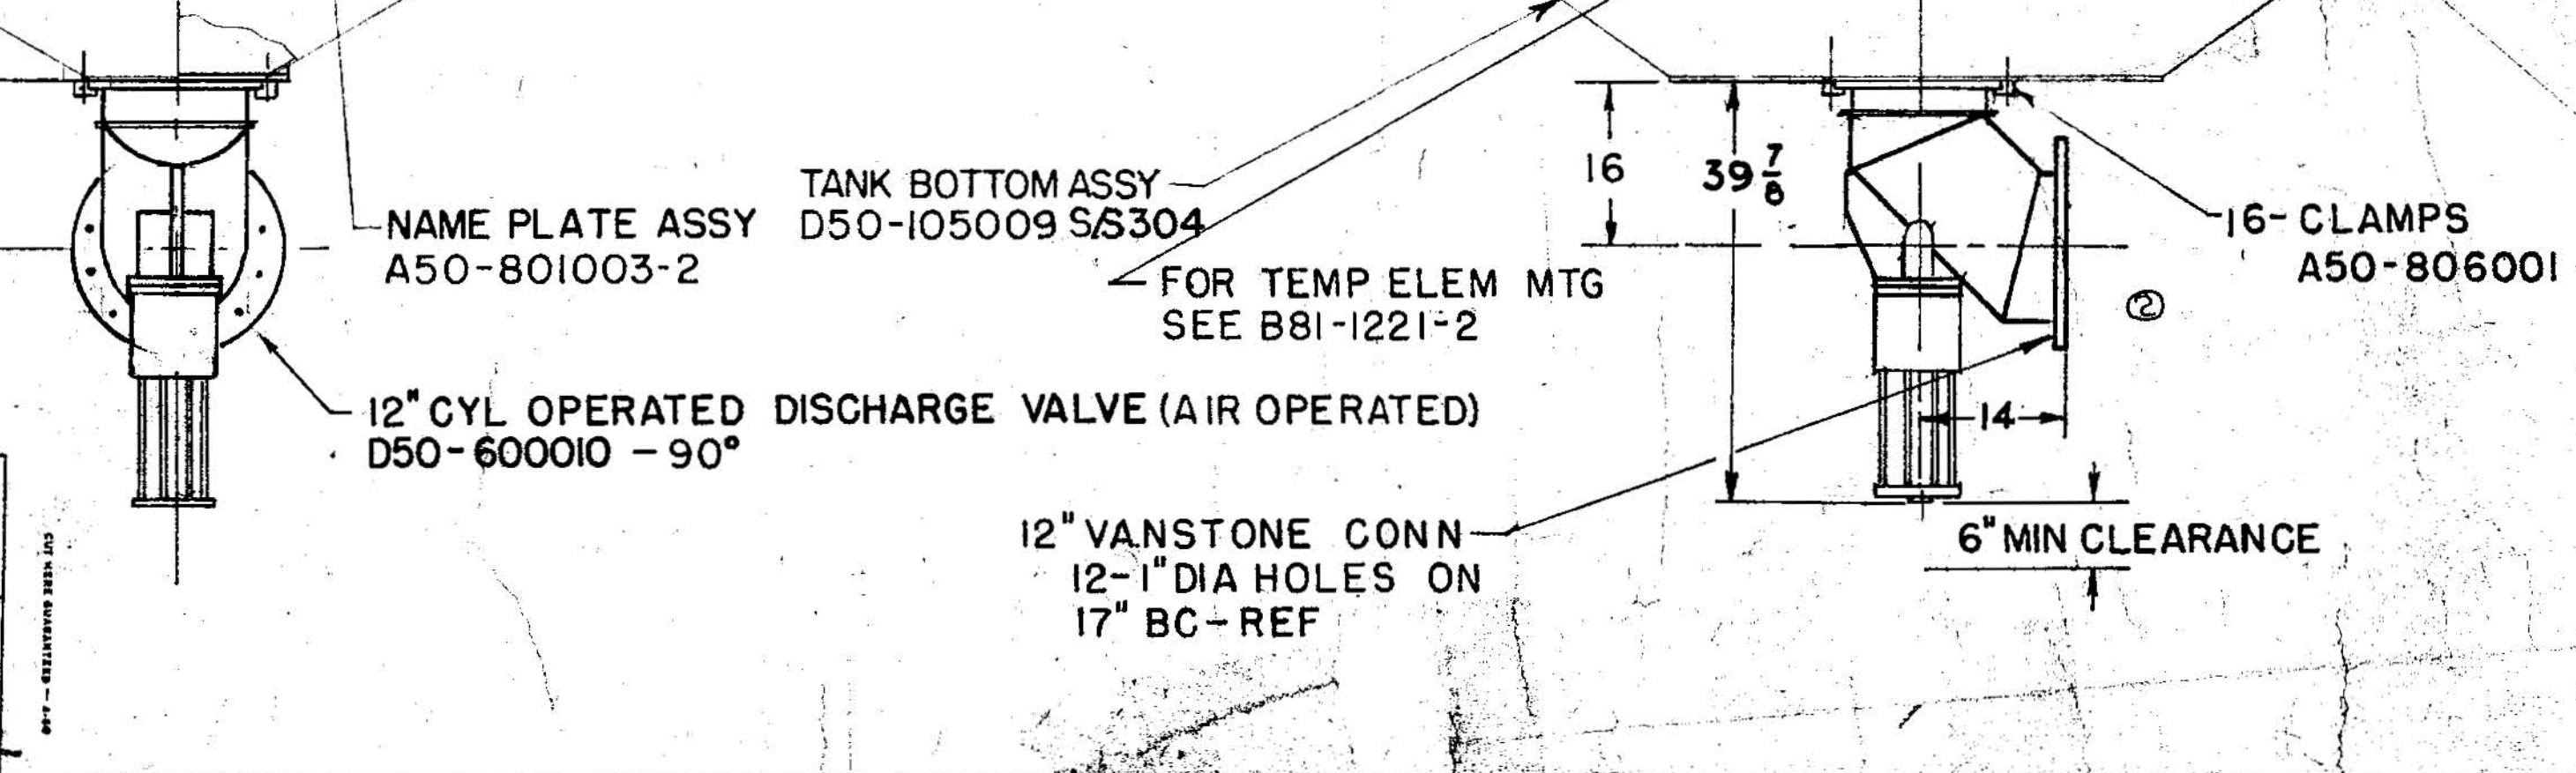

(TOTAL TANK CAPACITY 360 CU.FT.) CAPACITY 1300 # AT 6 1/2 %

SERIAL NO. HL-281 S.O. 165725

MILL LAYOUT D51-115016 B/P THEIR DWG 1095

ASSEMBLY BATCH TYPE S/S

JONES NO 2 HI-LO PULPER

FITCHBURG PA CO. FITCHBURG MASS

SCALE 3/4" = 1" DATE 2-2-62

E. D. JONES & SONS CO. PITTSFIELD, MASS.

DR. JF-S PGB

D51-100183