Electrical Requirements:

ALL INFORMATION PROVIDED BY COL-MET SPRAY BOOTHS AS TO ELECTRICAL REQUIREMENTS IS INTENDED INFORMATIONAL PURPOSES ONLY. COL-MET DOES NOT EMPLOY A LICENSED ELECTRICIAN AND, THEREFORE, MAKES NO CLAIM, EXPRESSED OR IMPLIED, AS TO THE ACTUAL ELECTRICAL CURRENT REQUIREMENTS. IT IS THE CUSTOMERS RESPONSIBILITY TO VERIFY AND DISCUSS ALL ELECTRICAL COMPONENTS WITH A QUALIFIED INDIVIDUAL.

Suggested Total System Amperes: 21 @ 460V/ 3Ph/ 60Hz

Suggested Total Lighting Amperes: 3 @ 120V/ 1Ph/ 60Hz

ITEM#	QTY.	PART#	DESCRIPTION
1	ONE		CONTROL PANEL (SEE PAGE 2 OF 2)
2	ONE		8000 CFM COLLECTOR; SEE PAGE 2 OF 2 FOR COLLECTOR INFORMATION
3	2		LIGHT FIXTURES; FOUR TUBE 48"; 32 WATT FIXTURES MOUNTED BEHIND CLEAR TEMPERED GLASS PANES, "UL" RATED FOR THEIR INTENDED USE & PLACEMENT, (2 CLASS 1, DIVISION 2, S&G TYPE, REAR ACCESS)
4	ONE		18 GA. GALV. STEEL SHELL

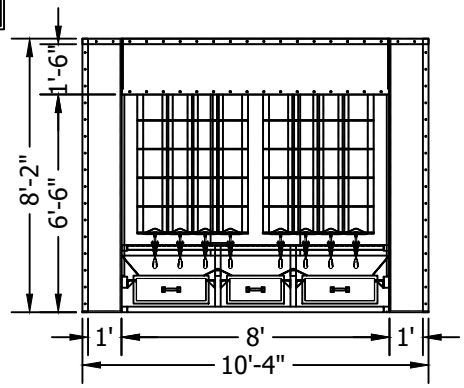

VIEW AT A-A

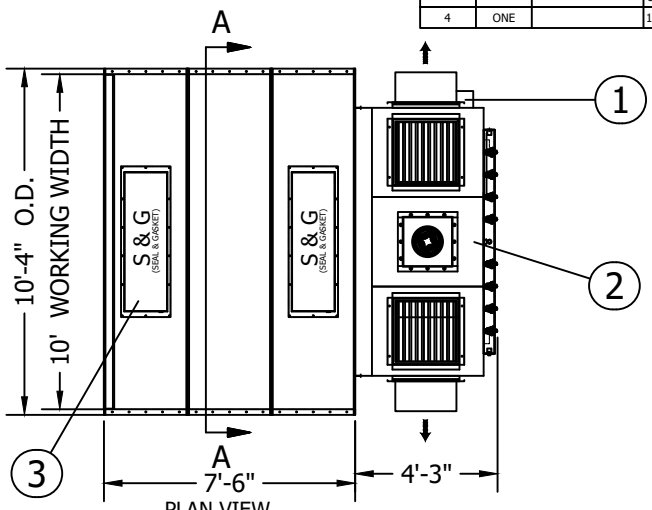

PLAN VIEW

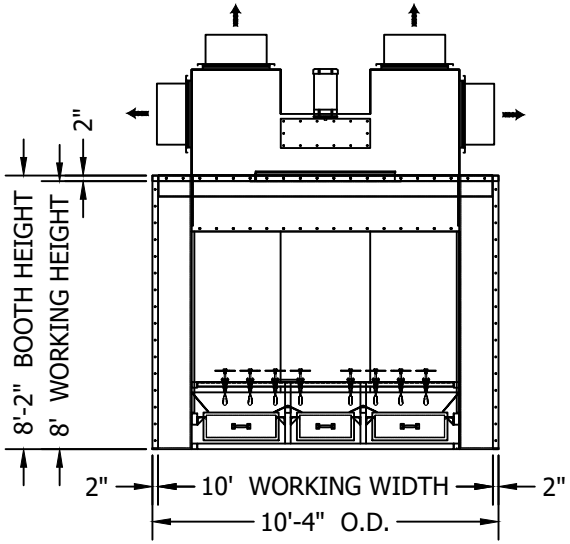

END VIEW

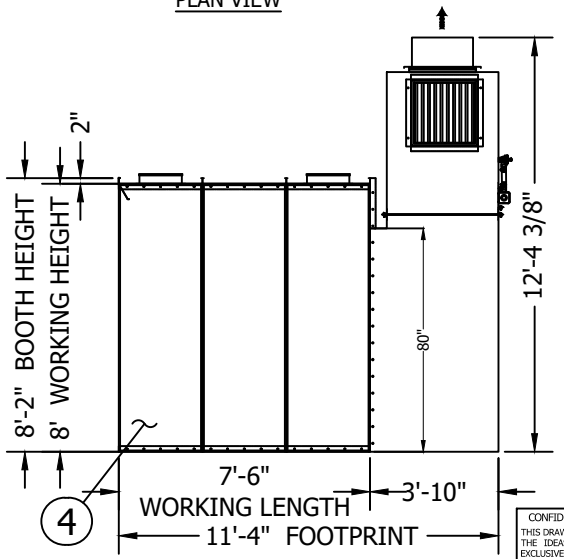

SIDE ELEVATION

ADDITIONAL DUCTWORK SUPPORT TO SUIT FIELD CONDITIONS TO BE SUPPLIED BY OTHERS.

ALL ANCHOR BOLTS TO BE SUPPLIED BY OTHERS.

COL-MET SPRAY BOOTHS ARE MANUFACTURED IN ACCORDANCE WITH NFPA-33.

BOOTH WALLS & CEILING PANELS FABRICATED OF 18 GA. GALVANIZED STEEL IN ACCORDANCE WITH NFPA-33 CHAPTER 5.1.4.

SEE ORDER ACKNOWLEDGEMENT FOR COMPLETE LIST OF PROVIDED STACK, AND OPTIONAL COMPONENTS.

IMPORTANT NOTICE:

IN THE CONSTRUCTION OF THIS BOOTH THERE MAY BE POSSIBLE FIELD MODIFICATIONS BY THE INSTALLER. THESE MODIFICATIONS MAY INCLUDE, BUT ARE NOT LIMITED TO:

- WELDING
- CUTTING
- NOTCHING
- DRILLING

GENERAL NOTES:

1. WORK CHAMBER WILL BE BOLTED CONSTRUCTION WITH 5/16" BOLTS ON STANDARD 6" CENTERS
2. WORK CHAMBER TO BE 18 GA. GALVANIZED UNPAINTED SHEET METAL EXCEPT AS NOTED.
3. ALL MOTOR CONTROLS, SWITCHES, LIGHT LAMPS OR TUBES, INCLUDING CONNECTIONS TO EQUIPMENT TO BE FURNISHED AND INSTALLED BY CUSTOMER EXCEPT AS NOTED.
4. AMPLE AIR MAKE-UP AND AIR SPACE WITHIN FRONT OF BOOTH MUST BE PROVIDED IN ORDER TO INSURE PROPER OPERATION OF BOOTH.
5. ALL LOCAL, CITY, & STATE PERMITS AND INSURANCE APPROVAL TO BE OBTAINED BY CUSTOMER.
6. CUSTOMER TO FURNISH ROOF PITCH, STACK QUANTITY AND CONFIGURATION IF REQUIRED.

For information on installation of the booth and components, please see our web site at www.colmetsb.com, click on "Resources" on the left side of the page, and then click on "Install Manual".

CONFIDENTIAL PROPRIETARY NOTICE

THIS DRAWING, THESE SPECIFICATIONS, AND THE IDEAS CONTAINED HEREIN ARE THE EXCLUSIVE PROPERTY OF COL-MET SPRAY BOOTHS. THEY SHALL BE RETURNED UPON DEMAND. NO PERSON SHALL COPY, USE, OR DISCLOSE THIS DRAWING, THESE SPECIFICATIONS, OR THE IDEAS CONTAINED HEREIN WITHOUT THE EXPRESS CONSENT OF COL-MET SPRAY BOOTHS. IT IS THE RESPONSIBILITY OF THE RECIPIENT TO CHECK ALL DETAIL INFORMATION AGAINST THE CONTRACT DOCUMENTATION. COL-MET SPRAY BOOTHS ACCEPTS NO LIABILITY OR RESPONSIBILITY FOR ANY LOSE OR DAMAGE SUFFERED AS A RESULT OF (OR CONNECTED WITH) THE USE OR MISUSE OF THE CAD DATA SUPPLIED FOR INFORMATION ONLY. ONCE THE DATA IS INTRODUCED INTO YOUR OWN CAD OR OTHER SYSTEM, COL-MET SPRAY BOOTHS CAN TAKE NO RESPONSIBILITY FOR IT'S ACCURACY.

COL-MET SPRAY BOOTHS
1635 INNOVATION DR.
ROCKWALL, TEXAS 75032
PHONE (972) 772-1919
FAX (972) 772-1833
WWW.COLMETSB.COM

JOB #: 42032

TITLE: RPB-1008-7.5 LAYOUT

DISTRIBUTOR:

APPROVAL BY: STM

DATE: 02/10/12

END USER:

DETAILED BY: OT

DATE: 4/17/12

CUSTOMER P.O.: 244638

FILE NAME: 42032 - rpb-1008-07.5 w-8000 slim collector.dwg

REV.

ORDER DATE: 02/09/12 CS/B

SCALE: NTS

SIZE: 11x17

REFERENCE JOB #:

SHEET: 1 OF 2