

High Yield Results In A Low Cost System


For low cost surface preparation of component parts in a wide range of applications, choose the WTB Tumbblast® machines. All WTB machines are equipped with an integrated dust collection system and our high performance, one-piece cast airless centrifugal blast wheel designed to propel abrasive media in a controlled pattern and direction. Unlike other methods of surface cleaning and preparation, the chemical-free process of shot blasting does not add environmental pollutants.

Summary of Benefits:

- COST EFFECTIVE
- MINIMAL MAINTENANCE
- REDUCED FLOOR SPACE REQUIREMENTS
- COMPLETELY SELF-CONTAINED
- SUPERIOR CLEANING EFFICIENCY
- NO EXPENSIVE FOUNDATIONS REQUIRED
- INTEGRATED DUST COLLECTOR
- CHEMICAL-FREE PROCESS

Tumbblast Machines


WTB•3

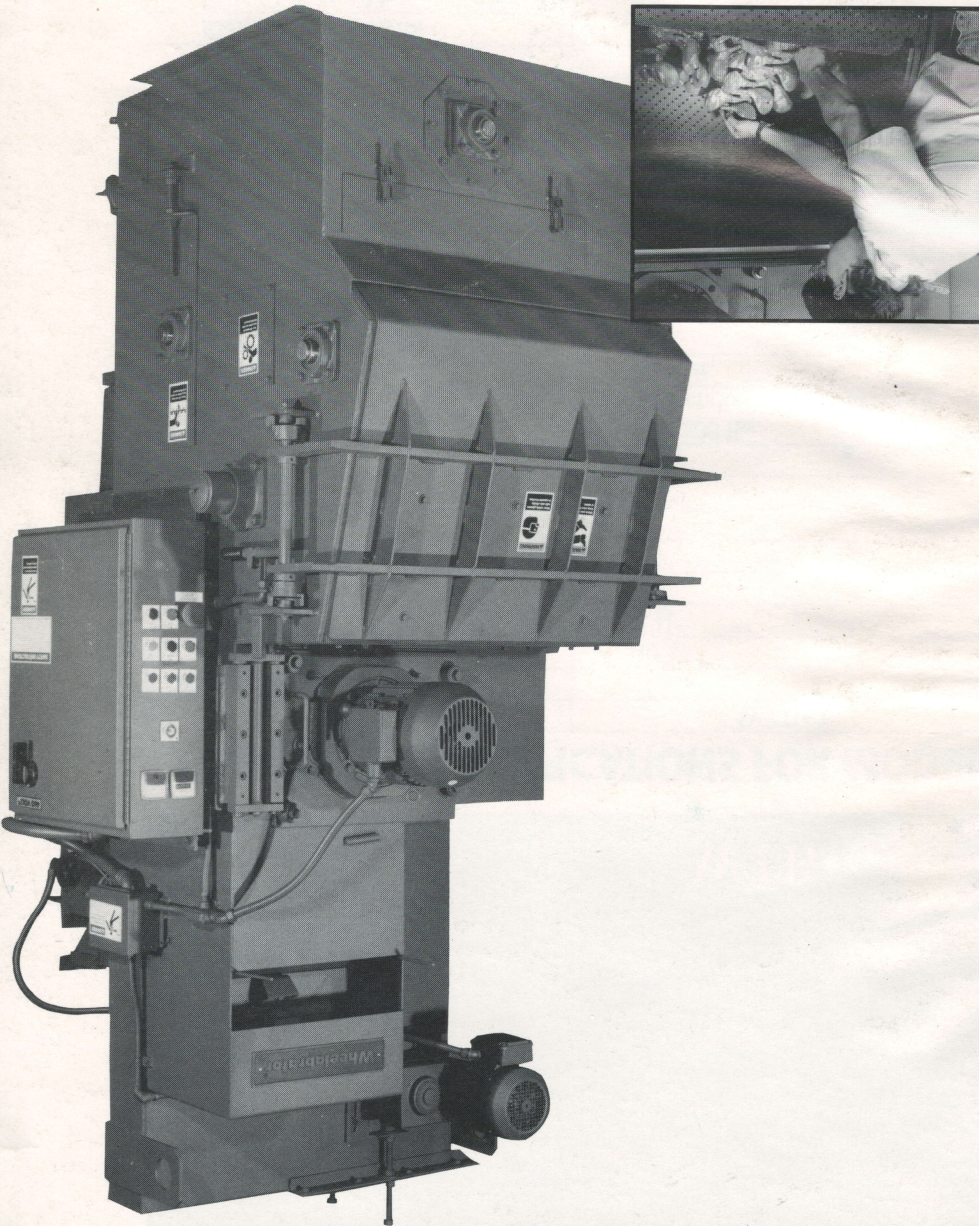

WTB•3 And WTB•6

Integrated Stationary Shot Blast Systems

Tumbblast Machines

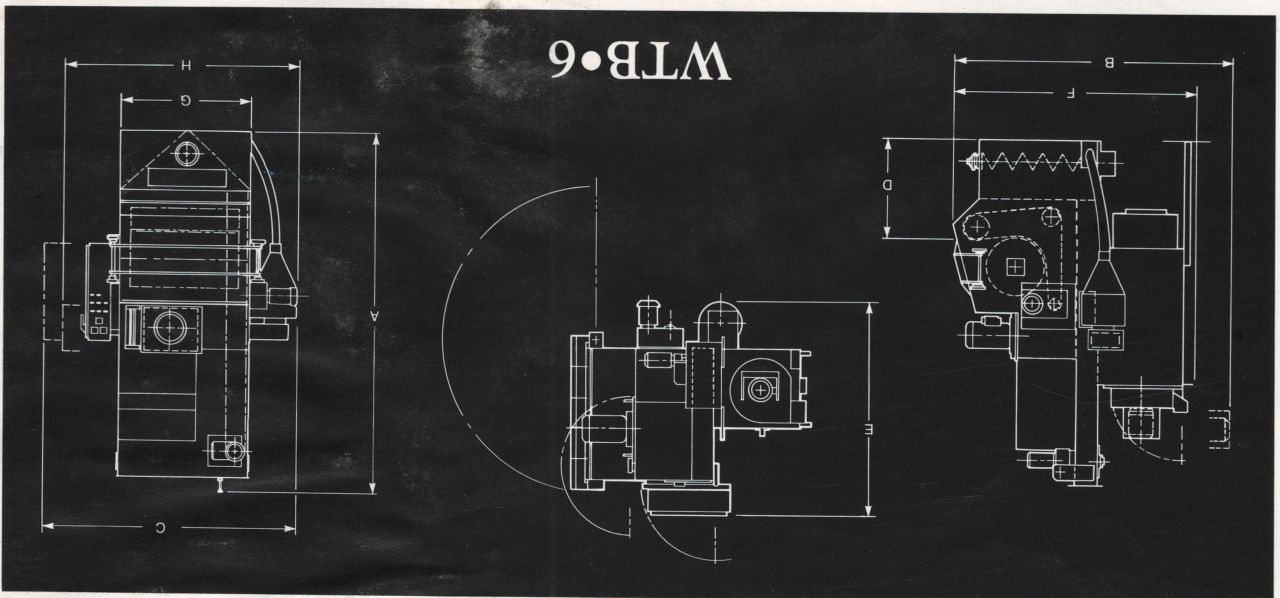

EQUIPMENT SPECIFICATIONS FOR MODELS WTB•3 and WTB•6

MODEL	WTB•3	WTB•6
Operating Dimensions:		
Height (A)	10'2"	11'0"
Length (B)	8'11"	9'6"
Width (C)	7'5"	7'11"
Discharge Height (D)	3'1"	3'2"
Actual Dimensions:		
Width (E)	6'0"	6'8"
Length (F)	6'10"	7'2"
Maximum Load Weight	300-400 lbs.	500-700 lbs.
Work Volume	3 cu. ft.	6 cu. ft.
Distance Between Barrel Heads:	29"	37"
Barrel Head Diameter:	24"	30½"
Loading Door	Manual Swing Door with Safety Interlock	Manual Swing Door with Safety Interlock
Work Conveyor	Rubber Belt 5/16"	Rubber Belt 5/16"
Separator Size	20"	28"
Electrical Requirements:		
Wheel Motor	7½ h.p.	15 h.p.
Mill Drive Motor	½ h.p.	1 h.p.
Elevator Drive Motor	1½ h.p.	1½ h.p.
Dust Collector Motor	5 h.p.	5 h.p.
Standard 460 volts, 3 phase, 60 hertz; Optional 230 volts, 3 phase, 60 hertz		
Ventilation	1500 CFM Integral with Blast Cabinet	1500 CFM Integral with Blast Cabinet
Noise Level	90 dBA or less	90 dBA or less
Abrasive Charge	850 lbs.	1500 lbs.
Gross Shipping Weight	5,200 lbs.	6,800 lbs.

Due to continuing product improvement, specifications are subject to change without notice.

Distributed by:

The Wheelabrator pride is derived from the attention we devote to details while satisfying your requirements.

THE WHEELABRATOR CORPORATION

27 Amajack Boulevard, Shennandoah, Georgia 30265
800/366-2121 404/251-6778

Printed in U.S.A.

© 1989 The Wheelabrator Corporation
CC/6-89