
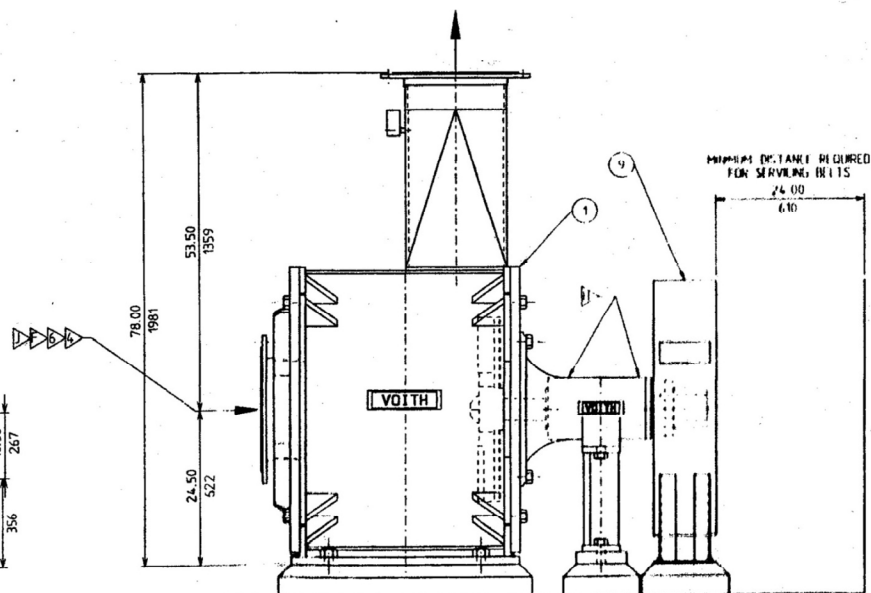


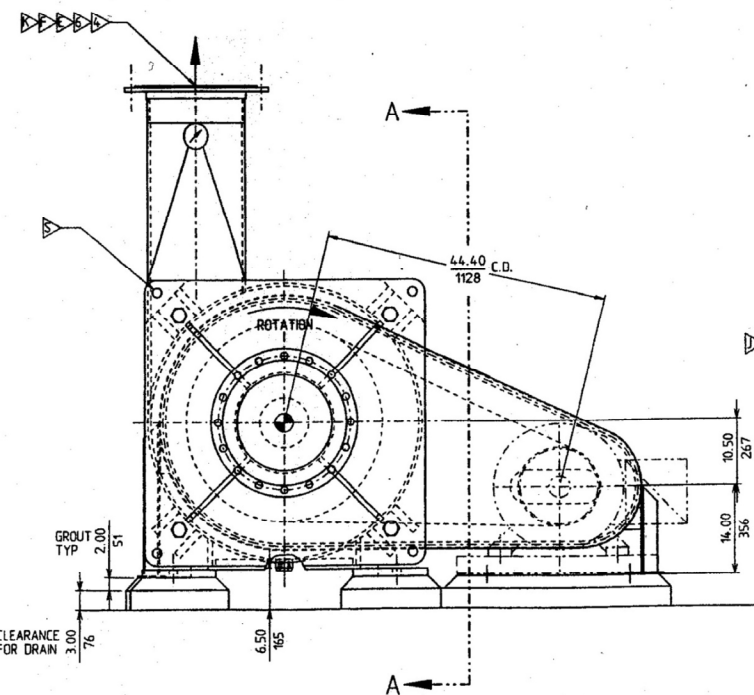

VII W A-A

SUPPLIED BY CUSTOMER

- ▶ MOTOR 150 HP, 1200 RPM, 445T FRAME W/ SLIDE RAILS AND CONT
- ▶ ANCHOR BOLTS
- ▶ SHIMS WITH AMPLE SUPPORT AREA
- ▶ INLET AND OUTLET PIPING WITH SUPPORTS
- ▶ FOUNDATION, ERECTION AND INSTALLATION
- ▶ FABRICATION TOLERANCES APPLY TO NOZZLE LOCATIONAL DIMENSION
- ▶ CUSTOMER MUST PROVIDE LOOSE ANGLE STYLE FACE RINGS AND SUFFICIENT NUMBER OF FIELD FIT JOINTS IN ADJOINING PIPING TO ACCOMMODATE MINOR VARIATIONS IN TRUE POSITION.

NOTES

- ▶ ALIGN DRIVE & DRIVEN SHEAVES TO MANUFACTURER'S SPECIFICATIONS.
- ▶ TENSION BELTS TO MANUFACTURER'S SPECIFICATIONS.
- ▶ CUSTOMER IS RESPONSIBLE FOR THE INSTALLATION OF:
 - 1. DRIVE SHEAVE AND BELTS
 - 2. DRIVE GUARD
- ▶ MACHINE WEIGHT: 6545 LBS EMPTY, 7828 LBS FULL
FULL WT. FORCE 3916 LBS. PER PAD; ADD 150% FOR DYNAMIC LOAD.
- ▶ DISCHARGE PIPING TO BE UNRESTRICTED & AS DIRECT AS POSSIBLE
TO MINIMIZE DYNAMIC HEAD LOSS & TRASH ACCUMULATION IN PIPING.
- ▶ CUSTOMER TO SUPPORT PIPING TO PREVENT ANY EXTERNAL LOADING
ON THE MACHINE.
- ▶ CUSTOMER TO SUPPLY SEAL WATER TO THE GLAND HOUSING AT 15
PSI ABOVE THE OPERATING PRESSURE, 25" NPTF.
- ▶ GREASE FITTINGS FOR BEARINGS.
 - 16.00 INLET VAN STONE (150" DRILL)
 - 16.00 OUTLET VAN STONE (150" DRILL)
- ▶ 1.38 DIA. (4) PLACES FOR 1.25 DIA. ANCHOR BOLTS
- ▶ 1.38 DIA. (2) PLACES FOR 1.25 DIA. ANCHOR BOLTS
- ▶ 0.62 DIA. (4) PLACES FOR 0.50 DIA. ANCHOR BOLTS
- ▶ 4.00 NPT DRAIN WITH PLUG
- ▶ 150 DIA. LIFTING HOLES FOR REMOVAL OF DOWEL.
- ▶ APPROXIMATE LOCATION FOR FULL WEIGHT CENTER OF GRAVITY.
- ▶ BOXED DIMENSIONS ARE ON HOLD DUE TO MISSING MOTOR
&/OR SLIDE BASE INFORMATION.

FOUNDATION LEGEND - AND ADDITIONAL 75% FOR DYNAMIC LOAD		
☉	BEARING CARTRIDGE SUPPORT STAND STATIC WEIGHT	500
☉	TANK HOUSING FLOOR WEIGHT EACH PAD	394
☉	BASIC MACHINE CENTER OF GRAVITY	7.828

DIMENSIONS ARE INCH/MM

VOITH SULZER
PAPER TECHNOLOGY
INSTALLATION DETAILS
CONTAMINEX CM3

[illegible]

PHOTOCOPY () ()		VOITH SULZER PAPER TECHNOLOGY INSTALLATION DETAIL CONTAMINEX CM3	
FOOT CH. 03-04 PH. 04-04 DR. 04-04 REF.	DATE 03-04 04-04 04-04	NAME [Redacted] [Redacted] [Redacted]	NO. 138491 887394