

IVC 60/30 AP M Z22

Compact industrial vacuum with low-wear side channel blower for continuous applications (e.g. production). For fine dusts in dust class M, ATEX Zone 22 and hygienically sensitive areas.



Order no. 1.576-106.0

- Suitable for use in ATEX zone 22

Technical data

EAN code		4039784463752
Number of current phases	Ph	3
Voltage	V	400
Frequency	Hz	50
Air flow	l/s / m³/h	53.3 / 192
Vacuum	mbar / kPa	250 / 25
Container capacity	l	60
Container material		Stainless steel
Rated input power	kW	3
Vacuuming type		Electric
Connection nominal diameter		DN 70
Accessory nominal diameter		DN 40
Sound pressure level	dB(A)	77
Cable length	m	8
Main filter dust class		M
Filter area for main filter	m²	1.9
Weight without accessories	kg	95
Weight incl. packaging	kg	95.6
Dimensions (L × W × H)	mm	970 × 690 × 1240

This machine requires instruction.

Equipment

Main filter: Flat pleated filter


Accessories included in the scope of delivery: no

Container emptying: Set-down trolley



Certified for ATEX Zone 22

- Explosion-proof industrial vacuum for safe vacuuming in ATEX Zone 22.

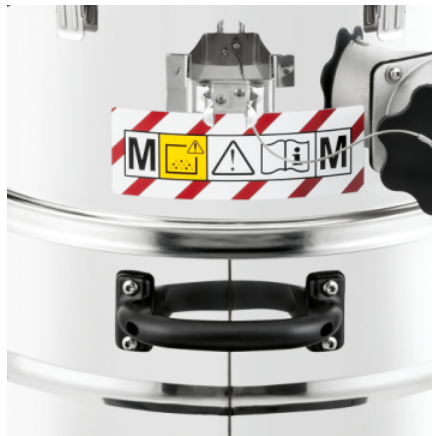

Dust class M

- Complete device certified according to DIN EN 60335-2-69 for dust class M.



Wear-resistant side channel blower

- A side channel blower delivers high suction power with a very long lifetime of at least 20,000 hours. These machines are therefore ideal for multiple shift operation.

ACCESSORIES FOR IVC 60/30 AP M Z22

1.576-106.0



		Order no.	Description	
FLAT PLEATED FILTER, STANDARD, BIA C OR UP TO DUST CLASS M				
Flat pleated filter, paper				
Dry flat pleated filter, green label, suitable for NT 65/2 Ap	1	6.904-283.0	Dry flat pleated filter made from cellulose fibre material with a green label. Suitable for NT 65/2 Ap variants for vacuuming fine dust and coarse dirt of dust classes L and M.	■
OTHER ACCESSORIES				
Universal accessories holder	2	9.989-789.0	Universal accessories holder for simple storage of suction tubes directly on industrial vacuums from the IVC, IVM and IVS product lines from Kärcher.	■
Power cable storage compartment	3	5.037-240.0	The power cord is stored on a hook attached to the tubular frame. The practical cord hook is suitable for a pipe diameter of 30 to 32 mm.	■
SUCTION TUBES				
Suction tube stainless steel AISI 304 DN40	4	9.989-912.0		☐
Suction tube el. ø40mm IK40 - AK40	5	9.990-933.0		☐
Suction tube 850 mm DN 40	6	9.977-525.0	Steel extension tube, electroconductive, DN 40. Length: 850 mm.	☐
Aluminium suction tube 1500 mm NW40	7	9.989-038.0	Aluminium extension tube, electroconductive, NW 40. Length: 1500 mm.	☐
Stainless steel suction tube 850 mm NW40	8	9.989-039.0	Stainless steel extension tube, electroconductive, NW 40. Length: 850 mm.	☐
ACCESSORY SETS				
Accessory kit for solids/dust				
Food accessory kit Expert DN 40	9	9.989-940.0	Food accessory kit DN 40: PU hose 3 m (9.989-970.0), handle (9.989-898.0), standard nozzle (9.989-838.0), brush (9.989-879.0), reducer (9.989-713.0), adapter (9.993-012.0).	☐
Accessory kit for overhead cleaning Expert DN 40	10	9.989-942.0	Accessory kit DN 40 for overhead cleaning: suction tubes (9.989-920.0/9.993-008.0), handles (9.989-916.0/9.989-918.0), standard nozzle (9.989-838.0), brush (9.989-879.0), adapter (9.993-012.0).	☐
Floor cleaning kit dry Professional DN 40	11	9.990-877.0	Professional dry floor cleaning set: adapter (9.990-874.0), hose (2.889-141.0), bend (2.889-172.0), 2 × suction tube (2.889-194.0), 3 × nozzles (6.906-958.0, 6.903-033.0, 6.902-105.0).	☐
Floor cleaning kit dry Advanced DN 40	12	9.990-893.0	Advanced dry floor cleaning set: EVA hose (9.990-923.0), handle (9.990-929.0), 2 × suction tube (9.990-933.0), floor nozzle (9.990-935.0), standard nozzle (9.980-773.0).	☐
Accessory kit for solids/dust Expert DN 40	13	9.989-659.0	Accessory kit DN 40 for industrial vacuum cleaners (solids and dust): EVA hose (9.988-088.0), handle (9.977-679.0), standard nozzle (9.988-401.0), reducer (9.989-690.0).	☐
NOZZLES				
Standard nozzles				
Standard nozzle silicone FDA blue DN-F40	14	9.989-835.0		☐

■ Included in the scope of supply. □ Available accessories.

ACCESSORIES FOR IVC 60/30 AP M Z22

1.576-106.0



		Order no.	Description	
NOZZLES				
Standard nozzles				
Standard nozzle silicone FDA green DN-F40	15	9.989-836.0		☐
Standard nozzle silicone FDA red DN-F40	16	9.989-837.0		☐
Standard nozzle silicone FDA transparent DN-F40	17	9.989-838.0		☐
Standard nozzle silicone FDA white DN-F40	18	9.989-839.0		☐
Standard nozzle silicone FDA yellow DN-F40	19	9.989-840.0		☐
Standard PVC nozzle DN40	20	9.989-674.0	Electroconductive standard PVC nozzle. DN 40.	☐
Standard nozzle silicone DN40	21	9.988-401.0	Stretchy standard nozzle made from silicone, inner cone DN 40.	☐
Standard nozzle cuttable rubber DN40	22	9.989-677.0	Standard nozzle, electroconductive, made from cuttable rubber. DN 40.	☐
Standard aluminium nozzle DN40	23	9.980-748.0	Diagonal nozzle made from anodised aluminium, electroconductive, DN 40.	☐
Flexible standard nozzles				
Standard nozzle flexible PVC DN40	24	9.981-420.0	Electroconductive, flexible round nozzle made from galvanised steel, with rubber mouthpiece DN 30.	☐
Floor nozzles				
Floor nozzle stainless steel AISI 304 DN-F40 blue	25	9.989-861.0		☐
Floor nozzle stainless steel AISI 316L DN-F40 green	26	9.989-863.0		☐
Floor nozzle stainless steel AISI 316L DN-F40 red	27	9.989-865.0		☐
Floor nozzle stainless steel AISI 316L DN-F40 transparent	28	9.989-867.0		☐

☐ Available accessories.

ACCESSORIES FOR IVC 60/30 AP M Z22

1.576-106.0



		Order no.	Description	
NOZZLES				
Floor nozzles				
Floor nozzle stainless steel AISI 316L DN-F40 white	29	9.989-869.0		☐
Floor nozzle stainless steel AISI 316L DN-F40 yellow	30	9.989-871.0		☐
Floor nozzle stainless steel AISI 316L DN-F40	31	9.989-914.0		☐
Aluminium floor nozzle 370 mm DN40	32	9.989-683.0	Floor nozzle, 370 mm, made from aluminium. DN 40.	☐
Crevice nozzles				
Crevice nozzle stainless steel DN40	33	9.989-282.0		☐
Crevice nozzle PP 15 mm × 145 mm DN40	34	9.988-116.0	Electroconductive, flat multi-purpose crevice nozzle made from plastic, DN 42.	☐
Flexible crevice nozzles				
Crevice nozzle flexible silicone FDA DN-F40 transparent	35	9.989-848.0		☐
Flexible crevice nozzle 20 mm × 45 mm DN40	36	9.981-423.0	Flexible and electroconductive crevice nozzle made from galvanised steel with 20 mm slot width, DN 40.	☐
Surface nozzles				
Silicone surface nozzle FDA blue DN-F40	37	9.989-849.0		☐
Silicone surface nozzle FDA green DN-F40	38	9.989-851.0		☐
Silicone surface nozzle FDA red DN-F40	39	9.989-853.0		☐
Silicone surface nozzle FDA transparent DN-F40	40	9.989-855.0		☐
Silicone surface nozzle FDA white DN-F40	41	9.989-857.0		☐
Silicone surface nozzle FDA yellow DN-F40	42	9.989-859.0		☐

☐ Available accessories.

ACCESSORIES FOR IVC 60/30 AP M Z22

1.576-106.0



		Order no.	Description	
NOZZLES				
Surface nozzles				
Silicone surface nozzle 120 mm DN40	43	9.988-118.0	Electroconductive rubber nozzle, angled, DN 40, suitable for use with foods.	☐
BRUSHES				
Standard brushes				
Standard brush 40 mm DN40	44	9.981-431.0	Flat brush nozzle DN 40.	☐
End brushes				
Brush FDA blue ø 75 mm DN-F40	45	9.989-873.0		☐
Brush FDA green ø 75 mm DN-F40	46	9.989-875.0		☐
Brush FDA red ø 75 mm DN-F40	47	9.989-877.0		☐
Brush FDA white ø 75 mm DN-F40	48	9.989-879.0		☐
Brush FDA yellow ø 75 mm DN-F40	49	9.989-881.0		☐
Surface brushes				
Surface brush 300 mm DN40	50	9.981-911.0	Vacuum brush, 300 mm, with 45° connection, with star screw, horsehair bristles.	☐
HOSES				
PO-Schläuche				
Hose EVA el. ø40mm 3m	51	9.990-923.0		☐
PVC				
Hose PVC DN40 3 m	52	9.989-962.0		☐
Hose PVC DN40 5 m	53	9.989-963.0		☐
Hose PVC DN40 3 m	54	9.989-647.0	PVC hose, DN 40. Temperature-resistant up to 85 °C and electrically conductive. Length: 3 m.	☐
Hose PVC DN40 5 m	55	9.989-614.0	Electroconductive PVC hose, DN 40. Temperature-resistant up to 85 °C. Length: 5 m.	☐
EVA hoses				
Hose EVA DN40 3 m	56	9.989-982.0		☐

☐ Available accessories.

ACCESSORIES FOR IVC 60/30 AP M Z22

1.576-106.0



56-57




58-59




60-61



62



63



64



68



69-72

		Order no.	Description	
HOSES				
EVA hoses				
Hose EVA, hose connectors stainless steel, DN 40 5 m	57	9.989-983.0		☐
Hose EVA NW40 3 m	58	9.988-088.0	Electroconductive hose with NW 40. Suitable for temperatures up to 65°C. Length: 3 m.	☐
Hose EVA NW40 5 m	59	9.988-089.0	Five-metre-long, electroconductive hose with NW 40. Suitable for temperatures up to 65°C. Length: 5 m.	☐
PU hoses				
Hose PU FDA, hose connectors stainless steel, DN 40 3 m	60	9.989-970.0		☐
Hose PU FDA DN40 5 m	61	9.989-971.0		☐
ADAPTERS / REDUCERS / DISTRIBUTORS				
Accessories adapter				
Adapter Food DN-F40	62	9.993-012.0		☐
Reducers/expanders				
Reduction DN70 to DN40	63	9.989-690.0	Electroconductive steel reducer for reduction from DN 70 to DN 40.	☐
Distributor				
AISI 304 stainless steel manifold DN70 to DN40	64	9.989-895.0		☐
PRE-SEPARATORS				
Pre-separator				
Pre-separator station SB 100L	65	9.982-243.0		☐
Pre-separator Ef solid materials 100 l DN70	66	9.982-238.0	Mobile pre-separator station with 100 l capacity and discharge flap.	☐
Pre-separator dust 60 l DN50	67	9.989-688.0		☐
Pre-separator drum 200 l	68	9.989-685.0	Standard drum which complies with the ISO 15750-2 standard.	☐
Pre-separator lid				
Pre-separator lid DN 50, for 200 l drum	69	9.981-659.0		☐
Pre-separator cover Op liquids ø 575 mm DN70	70	9.981-662.0	Pre-separator cover DN 70 for 200 litre standard drum (9.989-685.0).	☐

☐ Available accessories.

ACCESSORIES FOR IVC 60/30 AP M Z22
1.576-106.0



		Order no.	Description	
PRE-SEPARATORS				
Pre-separator lid				
Pre-separator cover solid materials ø 517 mm DN70	71	9.981-665.0	Pre-separator cover DN 70. Suitable for containers with 517 mm diameter.	☐
Pre-separator cover solid materials ø 575 mm DN70	72	9.981-661.0	Pre-separator cover DN 70 for 200 litre standard drum (9.989-685.0).	☐

☐ Available accessories.