
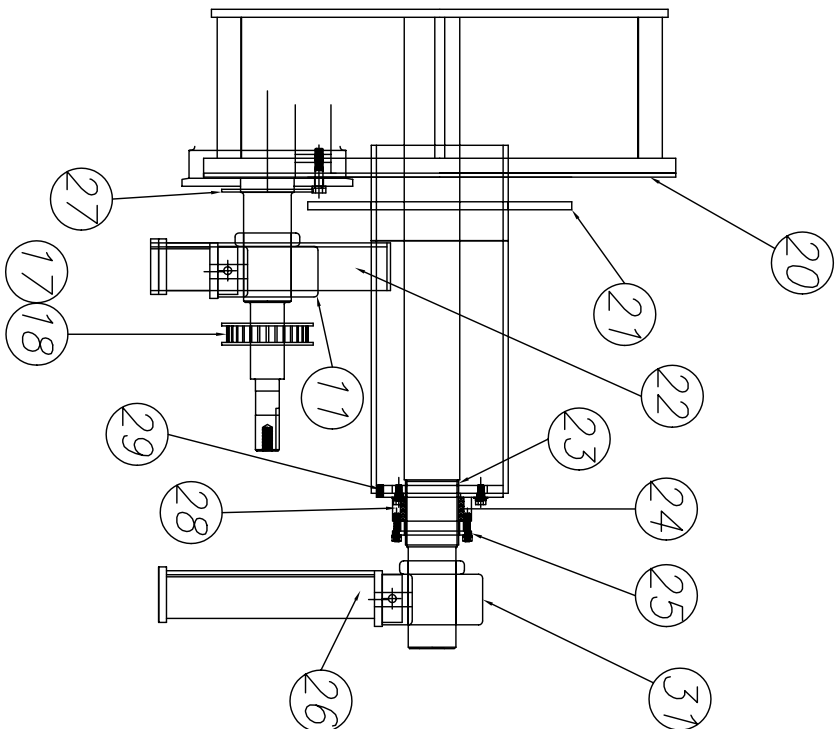
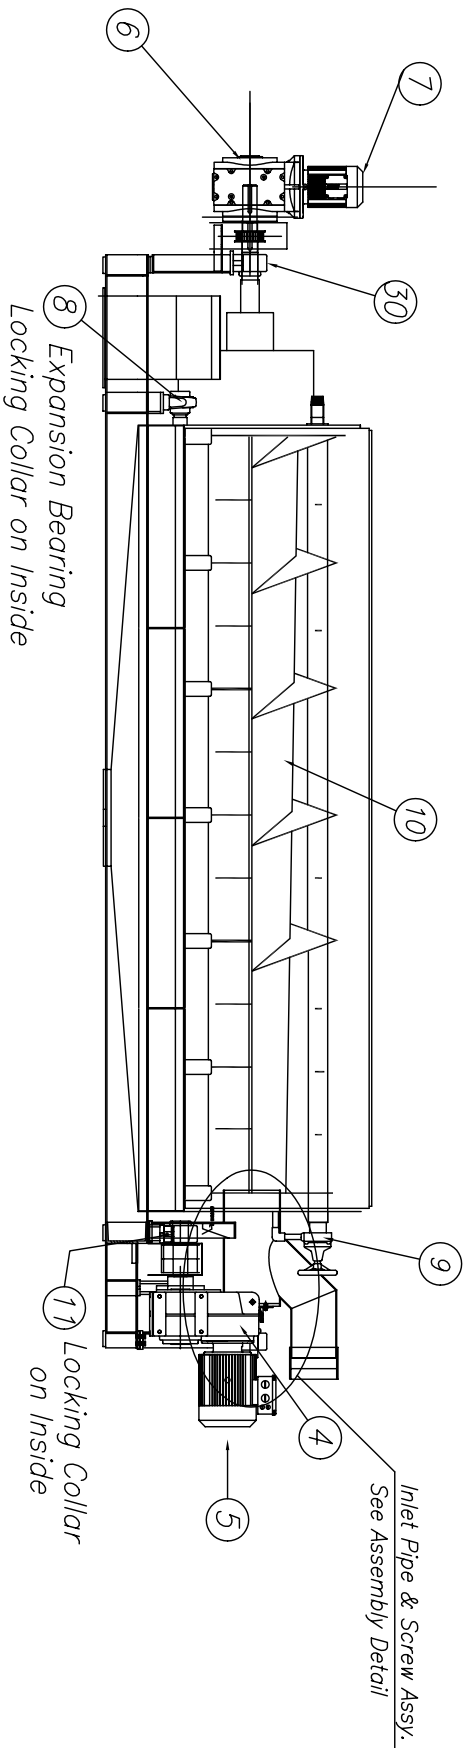


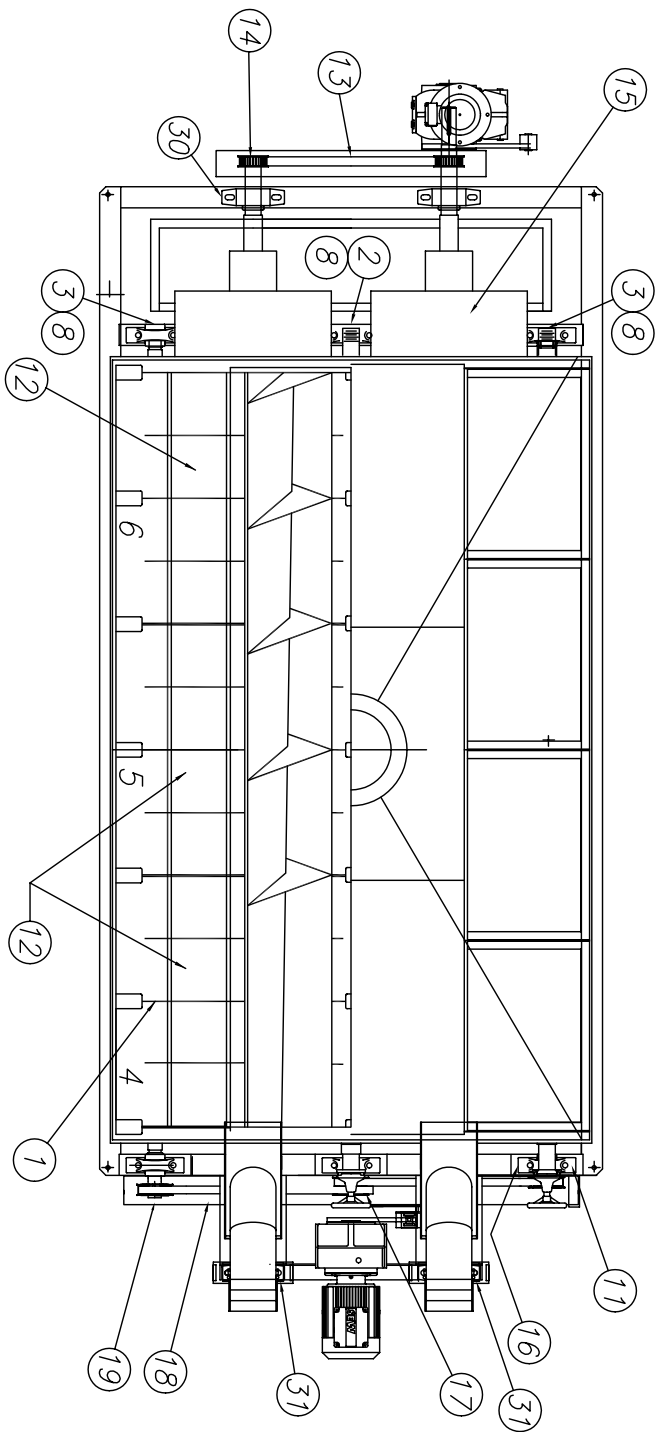

INLET PIPE & SCREW ASSEMBLY DETAIL

No.	Description	Qty.	No.	Description	Qty.
1	Drum Assembly 30.59" I.D. x36" O.D.	6	21	Inlet Drum Seal Ring 1/2" x 17"O.D. x 11" I.D.	2
2	Drive Shaft 9.875" O.D.	1	22	8" Feed Pipe & Support Stand Assembly	2
3	Idler Shaft 9.875" O.D.	2	23	Screw Shaft Packing Wear Sleeve	2
4	SEW Reducer, SA7ZT 15.64:1	1	24	Packing Rope, 1/4" Sq., Graphite impregnated (4 rows)	2
5	MOTOR BY FKC, 10 HP, 1800 RPM, L215TC, 460V 3 Phase	1	25	Brass Packing Gland Follower	2
6	SEW Reducer, SA97T 131.85:1	1	26	Screw Inlet Bearing support stand	2
7	MOTOR BY FKC, 5 HP, 1800 RPM, L184TC, 460V 3 Phase	1	27	Neoprene Rubber Slingers, 6"OD X 2 15/16"ID	3
8	Shaft Bearing, Linkbelt 3" EPE-B 22448E Expansion	3	28	Packing Gland Assembly	2
9	Self Cleaning, Brush-type, Shower Header	2	29	Inlet pipe flush plug	2
10	Screw 29" O.D.	2	30	Screw Support Bearing, Linkbelt 3" EP-B 22448E Non-Expansion	2
11	Shaft Bearing, Linkbelt 3" EP-B 22448E Non-Expansion	3	31	Screw Support Bearing, Linkbelt 3" EPE-B 22448E Expansion	2
12	Screens 18ga x .060"Ø Drum Positions 1 thru 6, 41% OA	6			
13	Polychain belt, 14MGT-2380-68	1	32		
14	Polychain sprocket, 14MX-36S-68, w/3020 bushing, 2 7/8" bore	2	33		
15	Discharge Tube	2	34		
16	Jacking Bolts for Drive/Idler Shaft Bearings	12	35		
17	Polychain Drive Sprocket, 14MX-36S-90, w/3020 Taperlock hub	1	36		
18	Polychain Drive Belt, 14MGT-2380-37	2	37		
19	Polychain Driven Sprocket, 14MX-36S-37 w/2517 Taperlock hub	2	38		
20	Inlet Drum Cover, 1/4" thk x 36" O.D.	2	39		
		2	40		

JOB No.	Messrs.	AUGUSTA SELECT TISSUE		Quantity
RST-209	AUGUSTA, GA			1
Drawing No.	Title	Parts List For		Date
		RST-HCS775 x 3600L		05/29/08
		Rotary Screen Thickener		Drawn by
G-209-57				A.H.
				
FKC CO., LTD.				
2708 W. 18TH ST. PORT ANGELES, WA 98362 (360) 452-9472 FAX (360) 452-6880				
FKC STD DWG #PA-G-57				

2	Issued as Certified	06/02/08	A.H.
1	Issued for Fabrication	05/29/08	A.H.
No.	Re v i s i o n	Date	Sign.