

VIPER 103SE



progressive
company
progressive
products

high performance

highly efficient

screening system

TOP SOIL



TRANSPORT POSITION



SAND



SAND & GRAVEL

VIPER 103 SE




Central Greasing Standard, Screenbox

Efficient 2 Deck, 4 Bearing Screenbox 3 m x 1.5 m


102 Hp Engine Water Cooled

Hydraulic Jack Legs & Fifth Wheel Coupling

TWIN SHAFT SHREDDER : OPTIONAL EXTRA

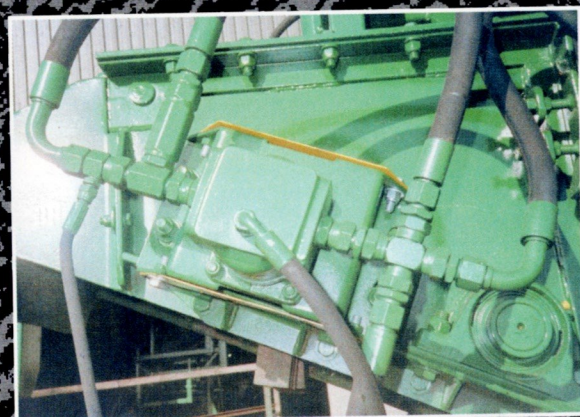

LIVE HEAD OPTION

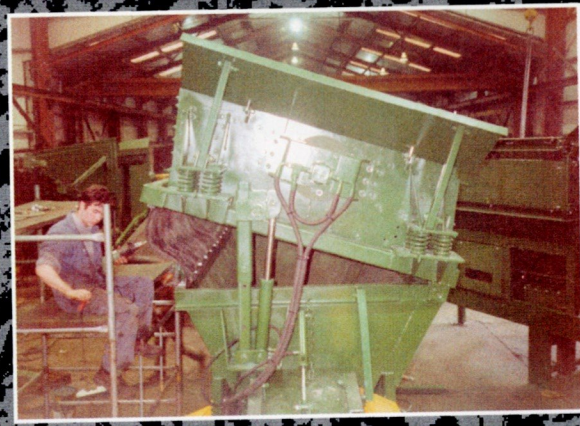


MAGNETIC BAND OPTION




DEMOLITION MATERIAL



VIPER 103 SE

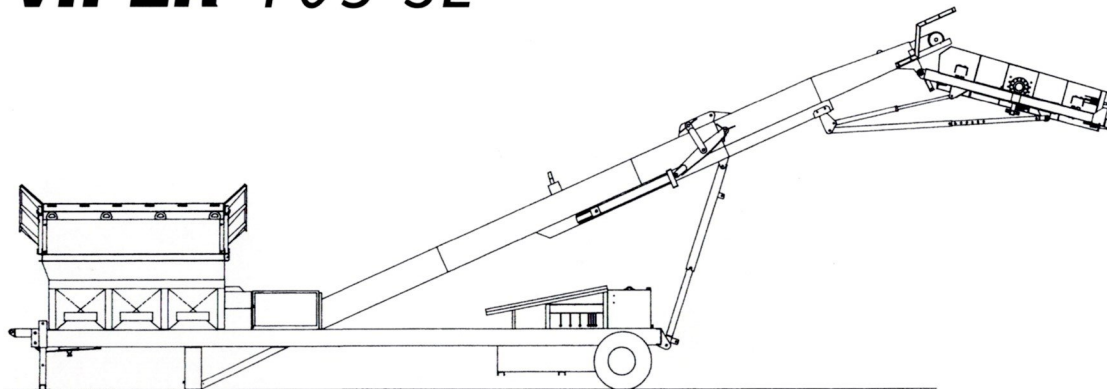

Viper 103 SE in working position

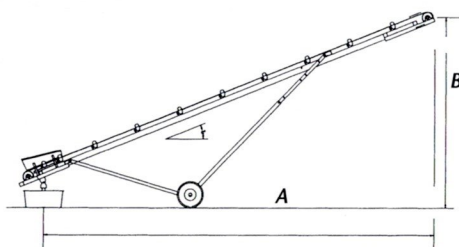

Elevation Viper 80 conveyor

V80 conveyor: discharge height

A	B
10.1 m / 33 ft 1 ³ / ₄ "	6.5 m / 21 ft 4 "
10.5 m / 34 ft 5 ¹ / ₄ "	5.61 m / 18 ft 5 "
10.8 m / 35 ft 6 ¹ / ₄ "	4.69 m / 15 ft 5 "
11 m / 36 ft 2 ³ / ₄ "	3.74 m / 12 ft 3 ¹ / ₂ "

technical specification

103 SE

Transport Length	14.13 m / 46 ft 4 inches
Transport Width	2.50 m / 8 ft 2 inches
Operational Length	20.36 m / 66 ft 10 inches
Operational Width	2.50 m / 8 ft 2 inches
Operational Height	6.90 m / 22 ft 8 inches
Transport Height	4.00 m / 13 ft 1.5 inches
Hopper Loading Height	3.40 m / 11 ft 2 inches
Hopper Loading Width	4.10 m / 13 ft 5 inches
Hopper Discharge Width	0.65 m / 2 ft 1.5 inches
Hopper Capacity	8.50m ³ / 11 yds ³
Feeder Belt Width	0.80 m / 2 ft 7.5 inches
Main Belt Width	0.75 m / 2 ft 6 inches
Screen Size	3.05 m x 1.50 m / 10 ft x 5 ft
Engine (Liquid Cooled)	4 cyl. turbo diesel 76kw / 102 hp
Max. Height Under Screenbox	4.60 m / 15 ft 1 inch
Hydraulic Oil Tank Capacity	375 litres / 99 US Gallons
Diesel Tank Capacity	300 litres / 80 US Gallons
Machine Weight (approx.)	14.50 Tonne / 31970 lbs



47 Moor Road, Coalisland,
County Tyrone,
Northern Ireland BT71 4QB
Tel: +44 (0) 28 87 740926
Fax: +44 (0) 28 87 747242
Email: sales@viperinternational.com
Web: www.viperinternational.com

dealer / distributor

All Specifications subject to change without prior notification