



Flotation

Deaeration cyclone with mechanical foam breaker

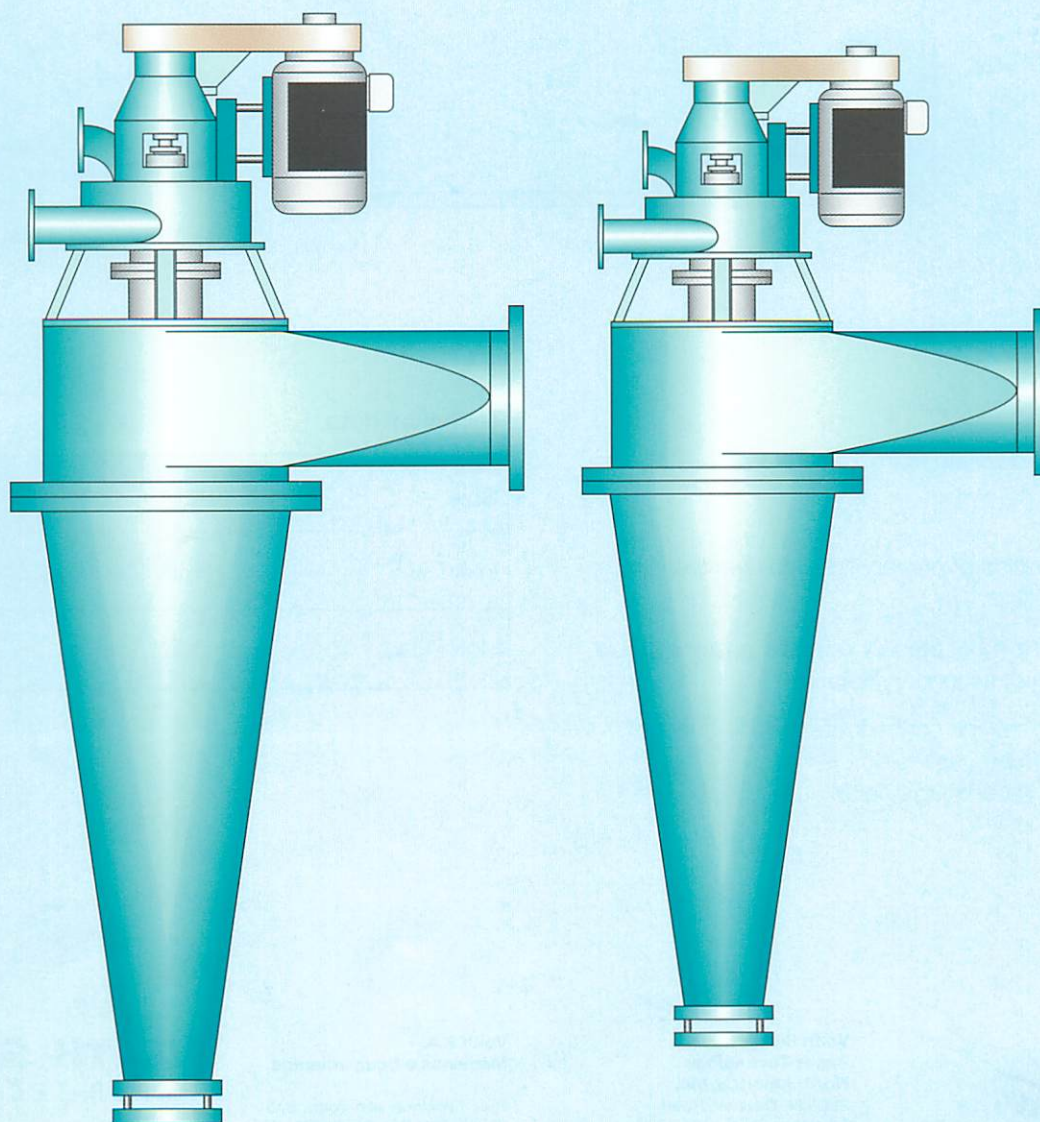

Deaeration cyclone with mechanical foam breaker EZM

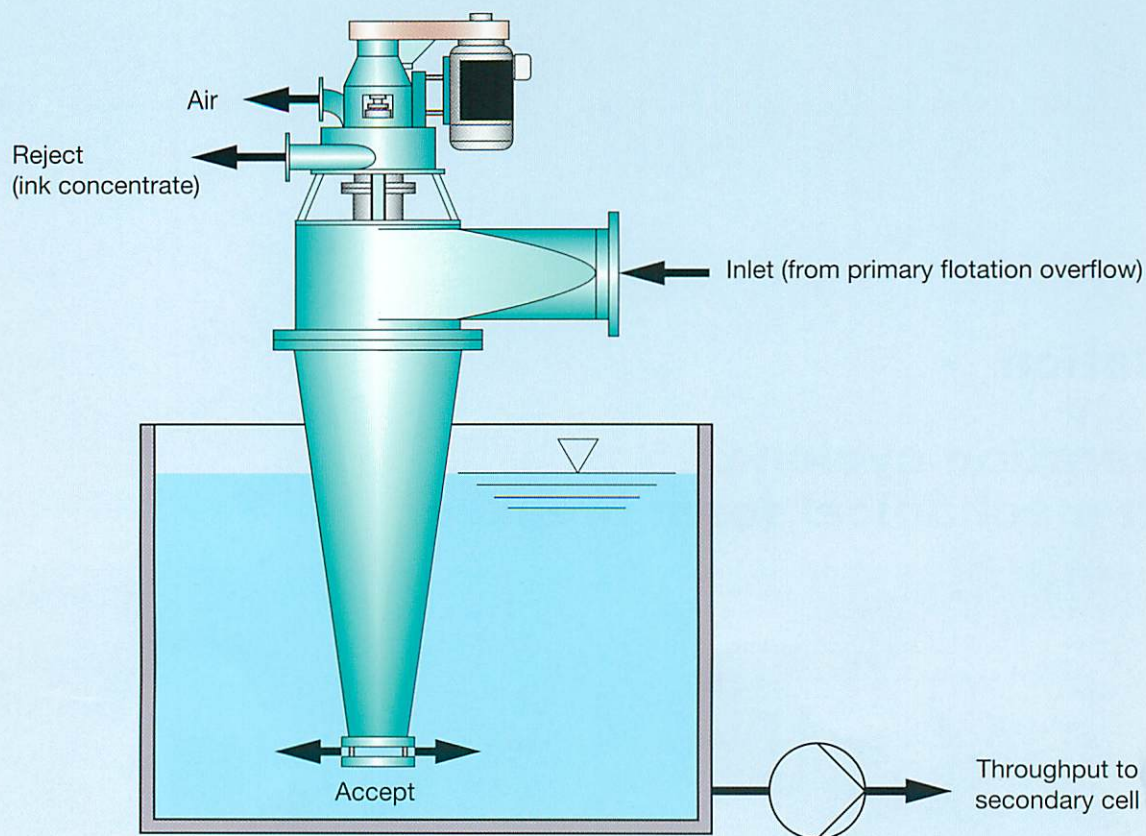

Applications

- Deaeration of deinking foam

Features

- Forced deaeration of primary flotation overflow in centrifugal field
 - Easy pumping of primary overflow ensures stable operation of secondary flotation
 - Separation of ink concentrate as side-effect of deaeration process (flotation in centrifugal field)

Technical data

Size	EZM	600-11	900-22
Inlet flow	l/min	500-4000	4000-8000
Motor load	kW	11	22

Voith Sulzer
Stoffaufbereitung
GmbH & Co. KG
Escher-Wyss-Straße 25
D-88212 Ravensburg
Germany
Tel. Germany + (751) 83 01
Fax Germany + (751) 83 22 80

Voith Sulzer
Paper Technology
North America, Inc.
2200 N. Roemer Road
Appleton, WI 54913-2337
USA
Tel. (920) 731-77 24
Fax (920) 731-02 40

Voith S.A.
Máquinas e Equipamentos
Rua Friedrich von Voith, 825
02995-000 São Paulo-SP
Brazil
Tel. (011) 840-44 30
Fax (011) 840-48 48

VOITH SULZER
PAPER TECHNOLOGY

Subject to alteration!
st.PB.07.026.GB.04/EZM