ITEM	QTY.	DESCRIPTION	DWG/PRT No.	TSIZE
1	1	ROPE STRETCHER 20FT DBL-DBL STACK ASSY	D1795-04-02	1
2	1	ROPE DRIVE ASSY	D1795-04-03	1
3	1	PNEUMATIC ENCLOSURE LAYOUT	D1795-04-06	1
4	16	10" DOUBLE ROPE RETURN SHEAVE (SDRR91SW)	P	16
5	13	SHEAVE ASSY SPECIAL TAIL CARRIER	C1795-04-10	13
6	6	T-ARM 9.45" LG. (6106-00-46)	P	6
7	6	T-ARM 12" LG. (6106-00-46)	P	6

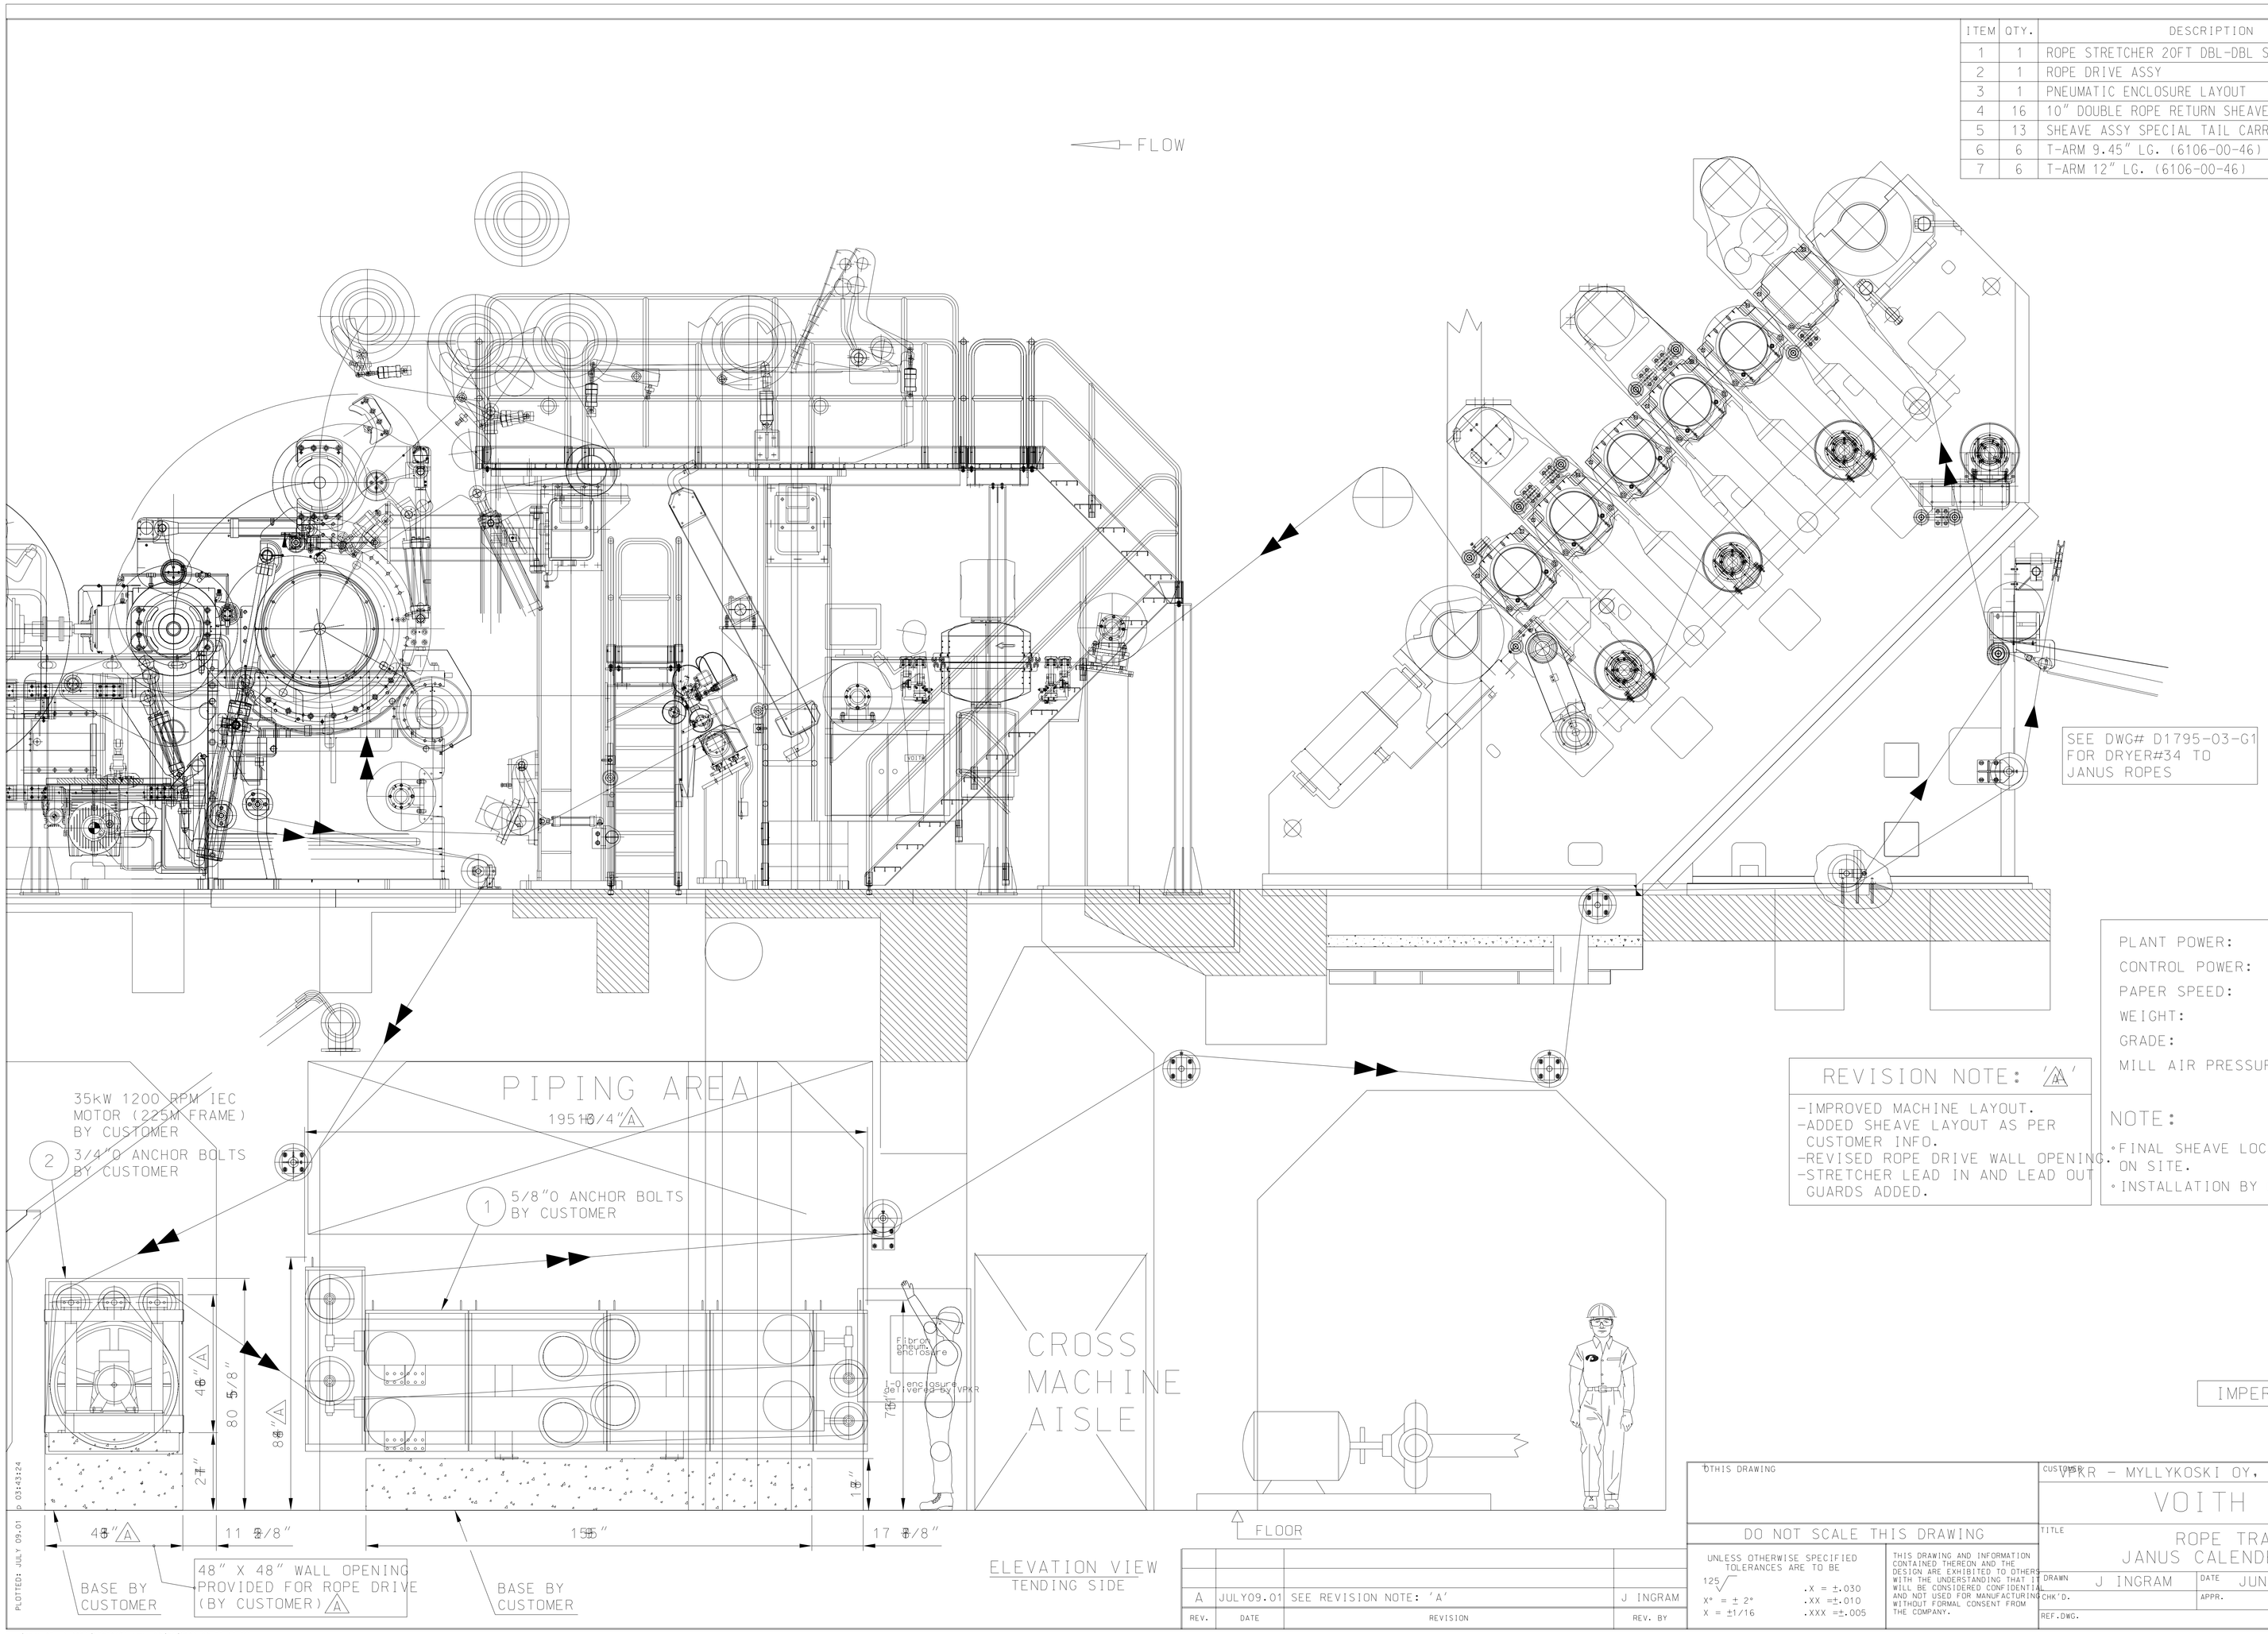

ELEVATION VIEW
TENDING SIDE

PLANT POWER:	480V 60Hz 3Ph
CONTROL POWER:	120V 60Hz 1Ph
PAPER SPEED:	870-1173 m/min.
WEIGHT:	35-48 g/m.sq
GRADE:	SCC
MILL AIR PRESSURE:	80 PSI MIN REQUIRED.

REVISION NOTE: 'A'

- IMPROVED MACHINE LAYOUT.
- ADDED SHEAVE LAYOUT AS PER CUSTOMER INFO.
- REVISED ROPE DRIVE WALL OPENING.
- STRETCHER LEAD IN AND LEAD OUT GUARDS ADDED.

NOTE:

- FINAL SHEAVE LOCATIONS TO BE DETERMINED ON SITE.
- INSTALLATION BY OTHERS.

FOR APPROVAL JUNE 20.01

IMPERIAL UNITS

Conforms to UL 508

REV.	DATE	REVISION	REV. BY
A	JULY09.01	SEE REVISION NOTE: 'A'	J INGRAM

THIS DRAWING

DO NOT SCALE THIS DRAWING

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE TO BE

125

X° = ± 2° .X = ±.030

X = ±1/16 .XX =±.010

.XXX =±.005

THIS DRAWING AND INFORMATION CONTAINED THEREON AND THE DESIGN ARE EXHIBITED TO OTHERS WITH THE UNDERSTANDING THAT IT WILL BE CONSIDERED CONFIDENTIAL AND NOT USED FOR MANUFACTURING WITHOUT FORMAL CONSENT FROM THE COMPANY.

CUSTOMER: VPKR - MYLLYKOSKI OY, MADISON PAPER CO.,ALSLIP, IL,

VOITH PAPER CORP.

TITLE: ROPE TRANSFER SYSTEM
JANUS CALENDER TO SIRIUS REEL

DRAWN	J INGRAM	DATE	JUNE 19.01	SCALE	N.T.S.	
CHK'D.		APPR.		DRAWING No.	D1795-04-G1	REV. A
REF.DWG.						

PLOTTED: JULY 09.01 @ 03:43:24

.../rcvd 07-13-2001/179504G1.dgn 09/04/2003 02:53:35 PM