CBA-K103A
INLET COMPRESSOR #1
MODEL: ARIEL JGD4
DRIVER: WAUKESHA P9394GSI
HP: 2250 HP @ 1200 RPM
DESIGN: 30 MMSCFD

MBF-K110A
1ST STAGE SUCTION SCRUBBER
SIZE: 42" ID x 96" S/S
DESIGN PRESSURE: 700 PSIG @ 150°F

MBL-K120A
1ST STAGE SUCTION BOTTLE
SIZE: 18" OD x 95" S/S
DESIGN PRESSURE: 700 PSIG @ 150°F

MBL-K140A
1ST STAGE DISCHARGE BOTTLE
SIZE: 16" OD x 94" S/S
DESIGN PRESSURE: 1287 PSIG @ 350°F

CBA-K133A
SIZE: 8 3/8" DIAMETER
MAWP: 1895 PSIG

CBA-K135A
SIZE: 8 3/8" DIAMETER
MAWP: 1895 PSIG

MBL-K150A
1ST STAGE SUCTION BOTTLE
SIZE: 18" OD x 95" S/S
DESIGN PRESSURE: 700 PSIG @ 150°F

MBL-K170A
1ST STAGE DISCHARGE BOTTLE
SIZE: 16" OD x 94" S/S
DESIGN PRESSURE: 1287 PSIG @ 350°F

CBA-K163A
SIZE: 8 3/8" DIAMETER
MAWP: 1895 PSIG

CBA-K165A
SIZE: 8 3/8" DIAMETER
MAWP: 1895 PSIG

HAL-K180A
FORCED DRAFT AIR EXCHANGER
DESIGN: 1250 MAWP @ 350°F
(2) 40 HP ELECTRIC MOTOR FAN DRIVE

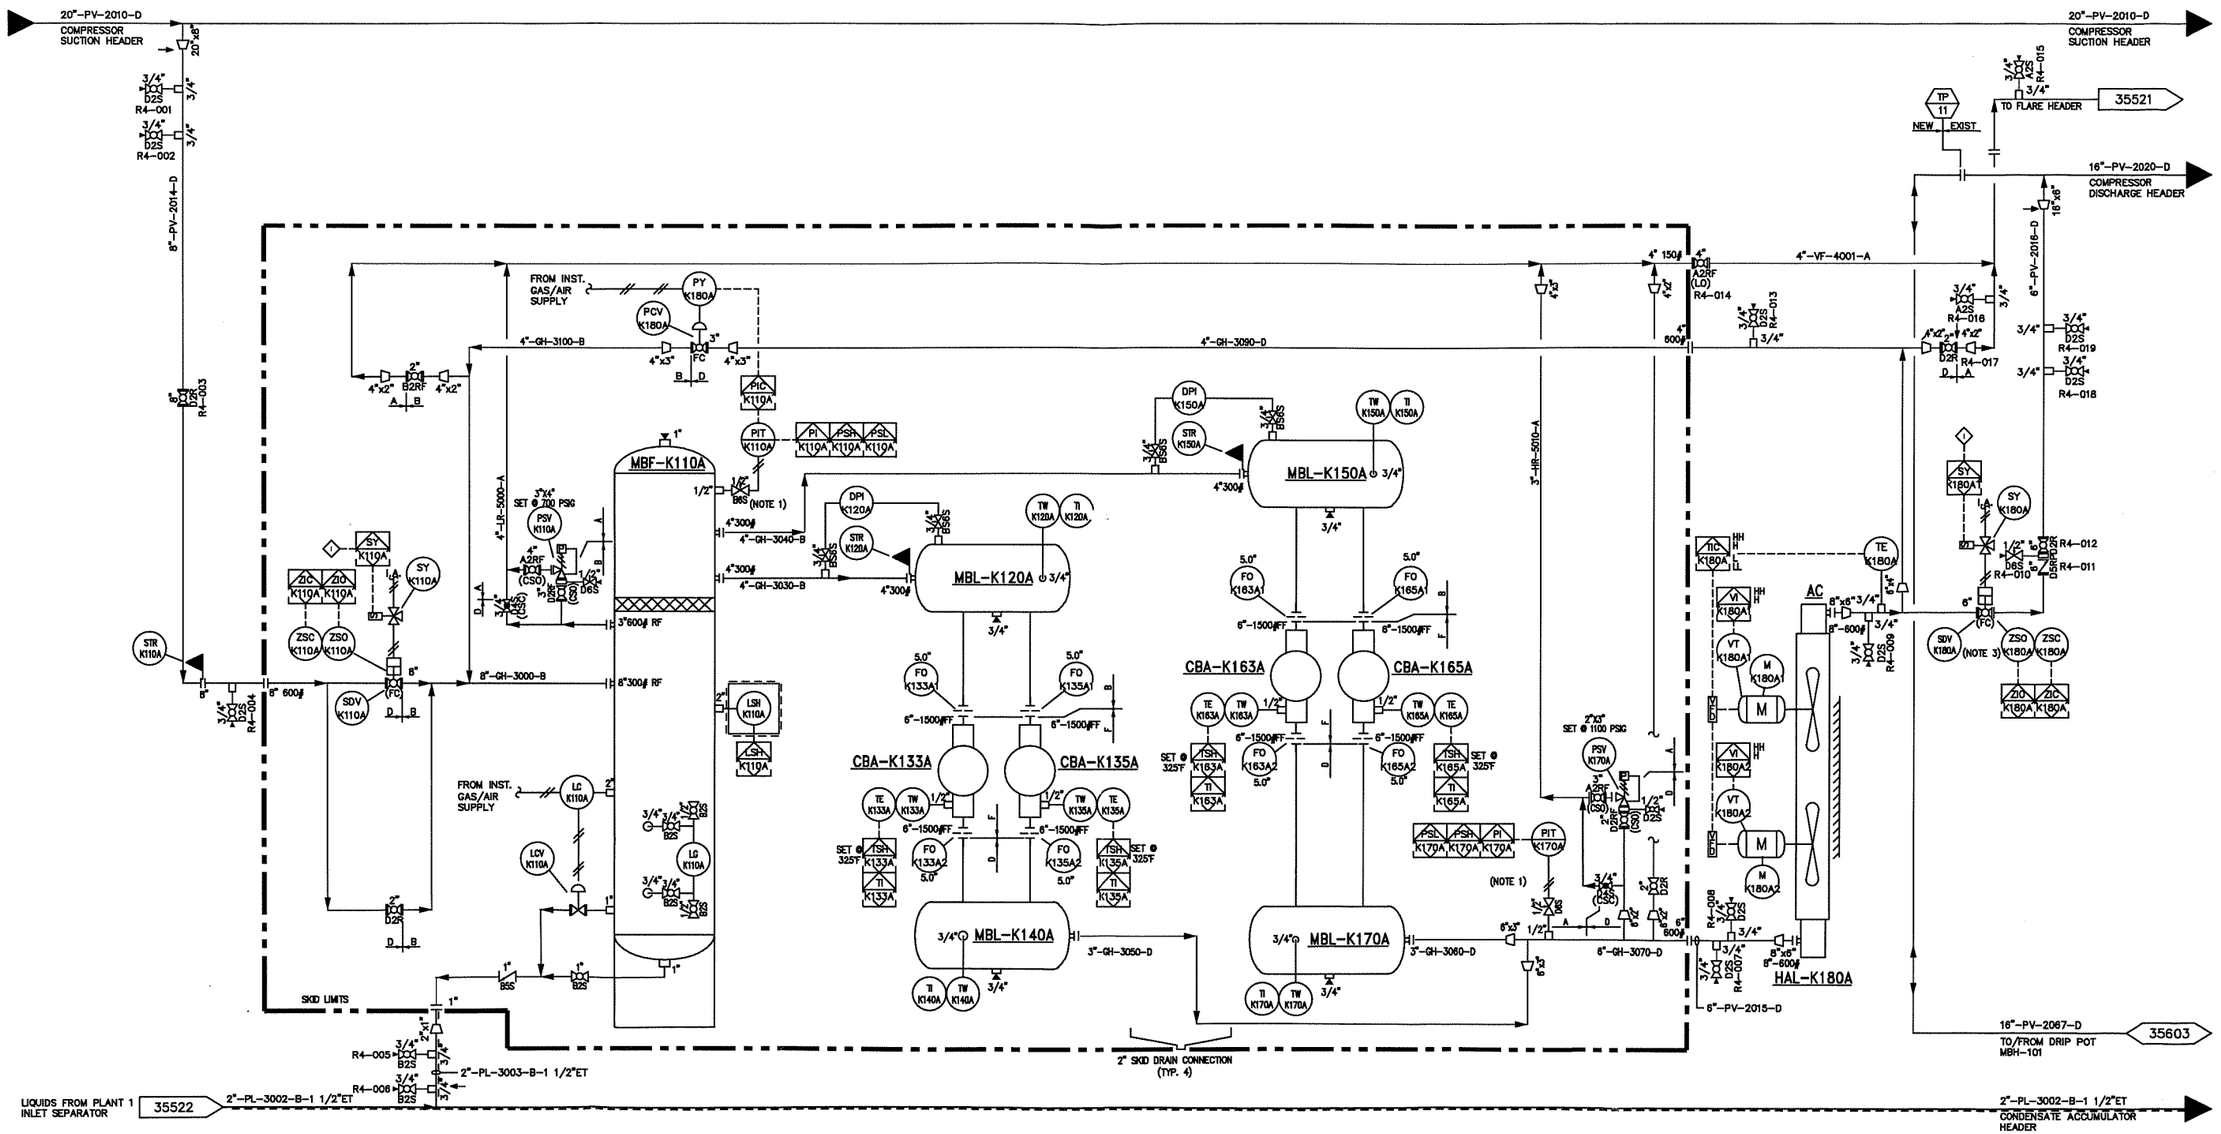

NOTES:

1) TUBING FROM NEEDLE VALVE TO PANEL TO BE 3/8"SS.
2) THE COOLER FAN IS DRIVEN BY TWO (2) 40HP, 1800 RPM, 460/60/3, TEFC MOTOR. POWER IS TO BE SUPPLIED BY THE CUSTOMER.
3) VALVES SHALL BE SHIPPED LOOSE BY REAGAN FOR INSTALLATION IN THE FIELD.

NO.	DESCRIPTION	APP'D	DATE	BY
1	AS-BUILT	DAH	02/21	MJL

REVISIONS