


48718910-3

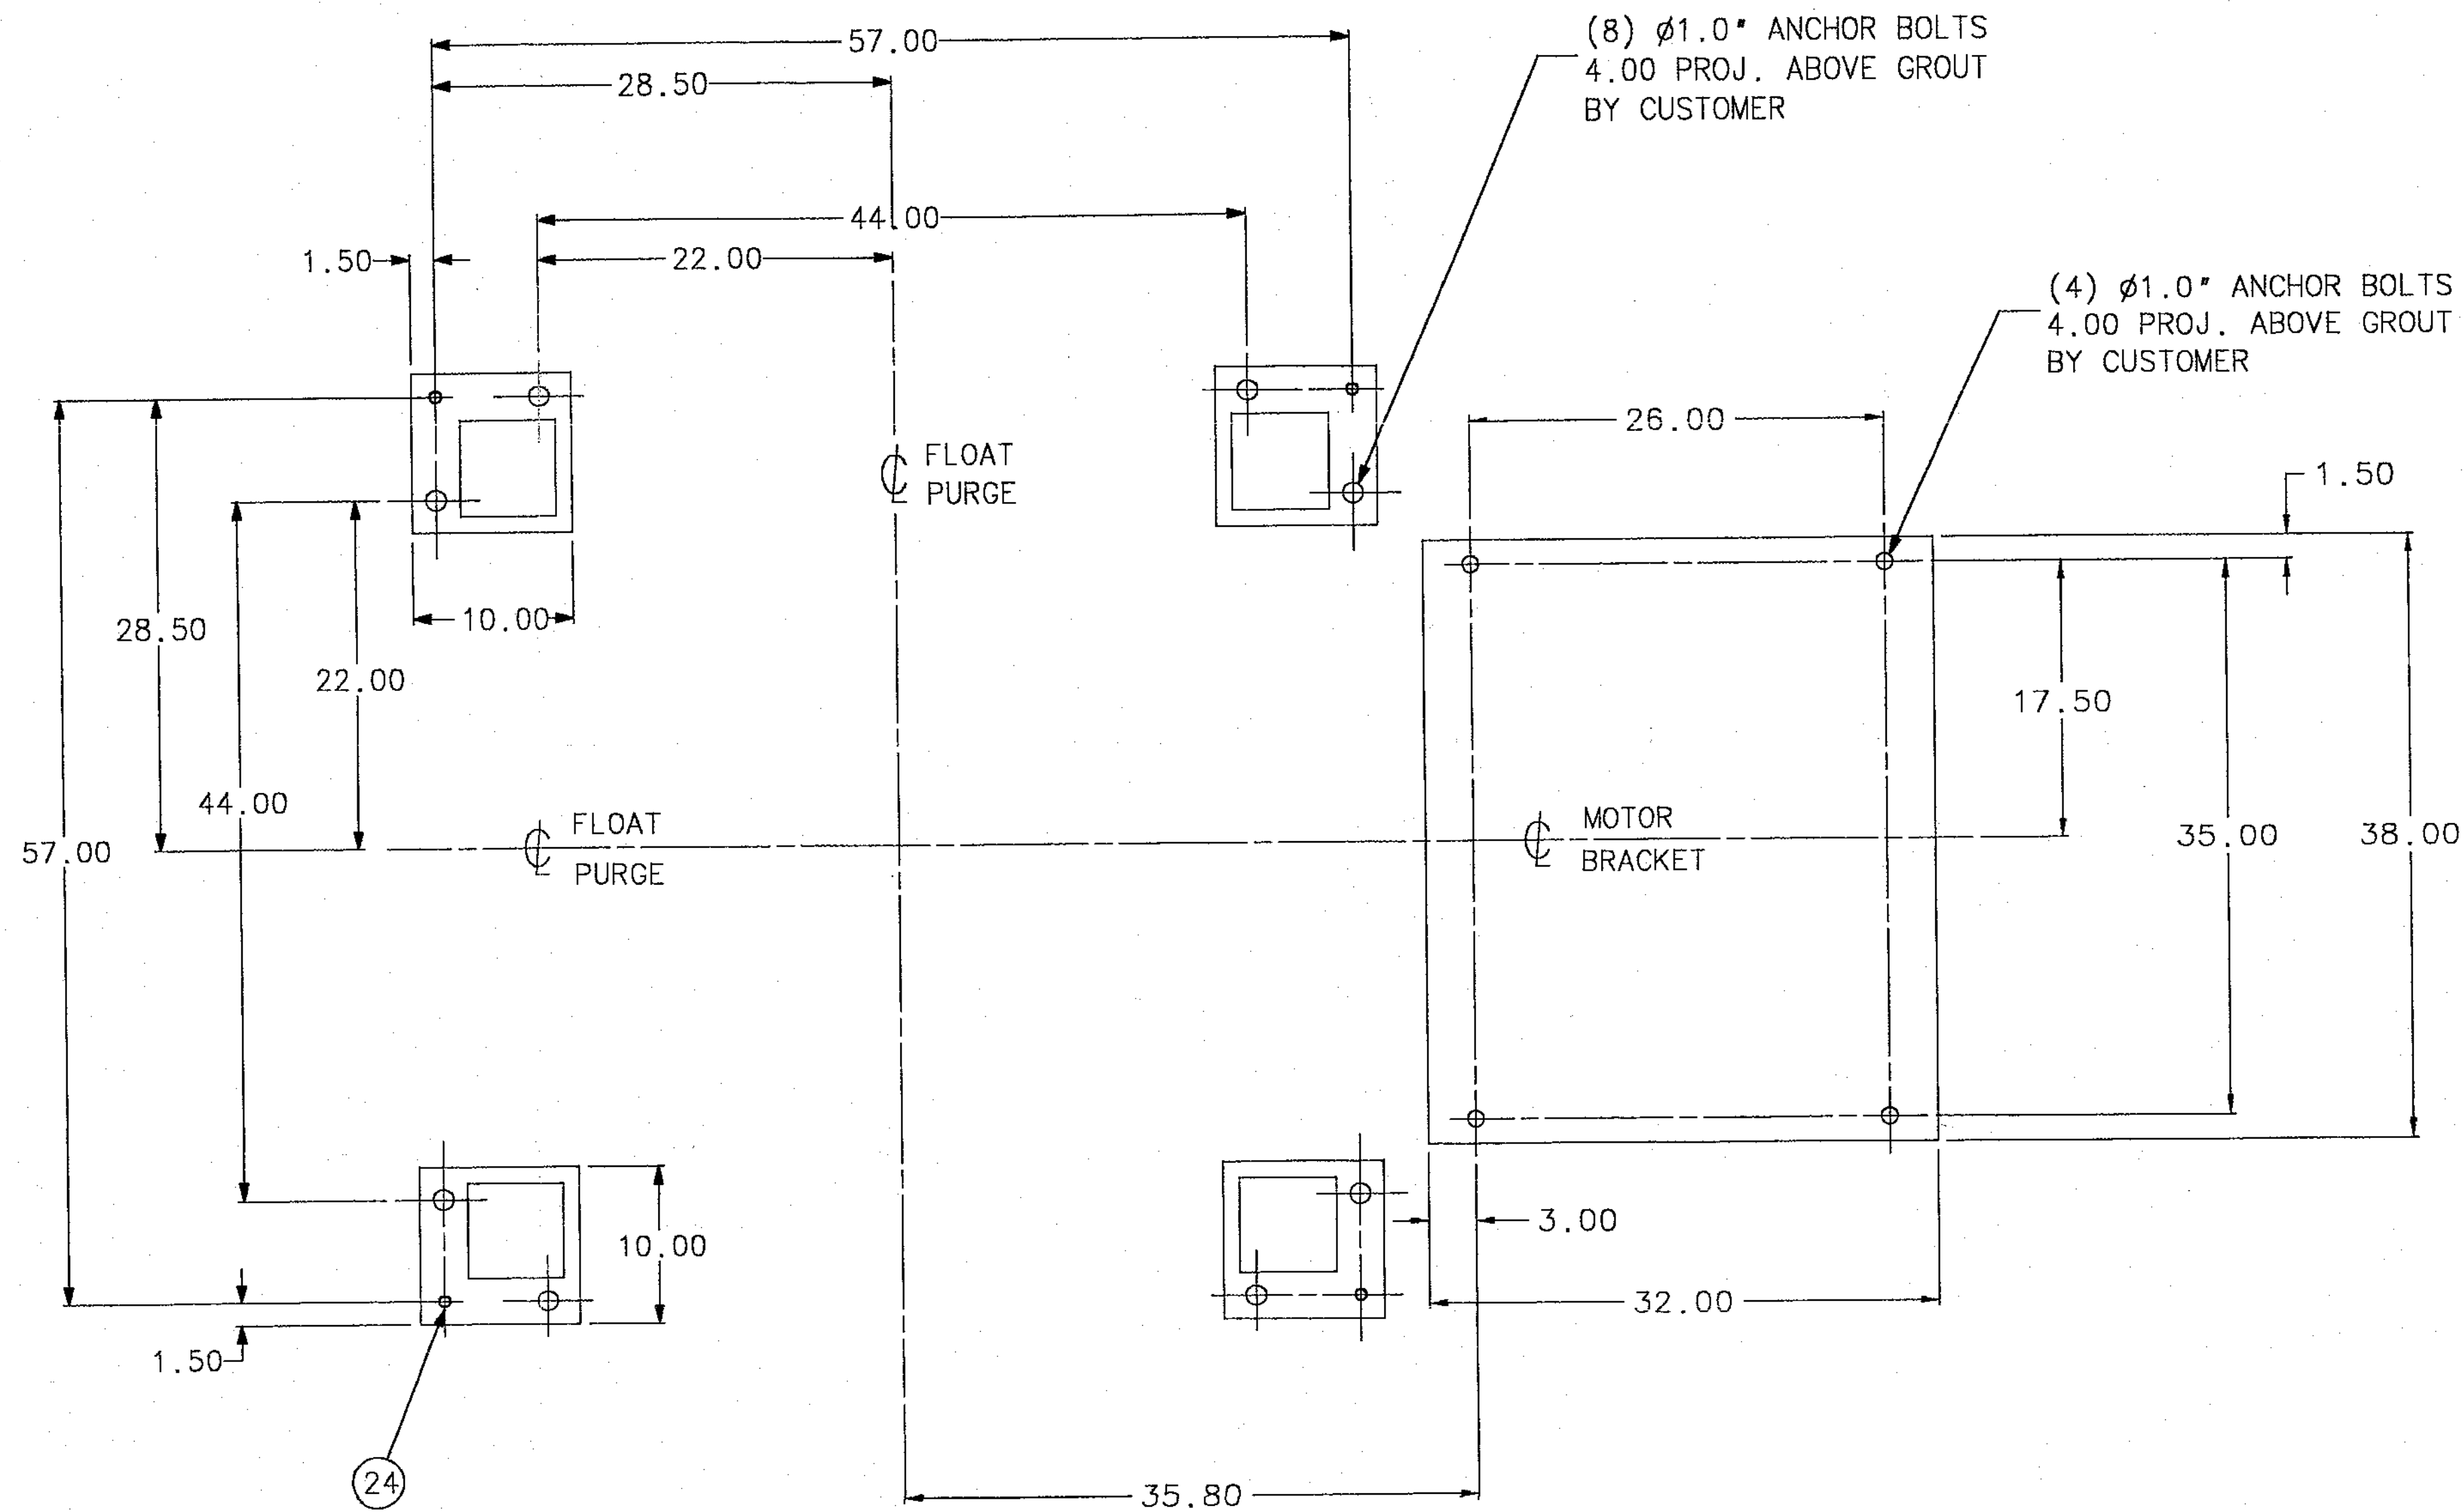

ANCHOR BOLT PLAN

ITEM No.	DRAWING No. PART No.	QTY	MATERIAL	DESCRIPTION
1	3011381-004	1	316L STN. STL.	SECTION, DISCHARGE
2	3013525-004	1	316L STN STL	SECTION, INLET
3	3011362	1	316L STN STL	ASSEMBLY, ROTATING ELEMENT
4	*	*	*	*
5	2002565-001	1	STEEL	BRACKET, MOTOR
6	*	*	*	*
7	4001763	1	*	ASSEMBLY, NAMEPLATE
8	1018113	1	STEEL	SHEAVE, DRIVEN- 30.0 O.D. BV 5 GR. TYPE QD
9	1018141	1	CARBON STL	BUSHING, M TYPE QD FOR 3.00 SHAFT 3/4 X 3/8 KW
10	1018105	1	STEEL	SHEAVE DRIVE- 15.0 O.D. BV 5 GR. TYPE QD
11	1015952	1	CARBON STL	BUSHING, F TYPE QD FOR 3-3/8 SHAFT 7/8 X 7/16 KW
12	1021709	1	RUBBER	V-BELT, 5 BANDED-BVX-1600 C.D.= 44.0
13	*	REF	BY CUSTOMER	MOTOR - 150 HP, 1200 RPM, 447T FRAME
14	1000105	73	S.A.E. GR.2	HEX HEAD CAP SCREW - 1/4-20NC X 1.00 LG
15	*	*	*	*
16	1023657	1	BUNA-N	O-RING- .275 SECT DIA- 50.50 OD X 50.25 ID
17	2006994	2	316L STN STL	PLATE, CLAMP RETAINER
18	*	*	*	*
19	1000304	8	S.A.E. GR.2	HEX HEAD CAP SCREW - 3/8-16NC X 1.25 LG
20	*	*	*	*
21	1502679	24	A-193 GR. B7	STUD- 1-8NC X 5.50 LG, 2" TAP END, 1.75 NUT END
22	1036508	24	316 STN STL	HEAVY HEX FULL NUT - 1"-8NC-2B
23	1504237	6	1B-8 STN STL	HEX HEAD CAP SCREW - 1 1/8-7NC X 3.00 LG
24	1000605	4	S.A.E. GR.2	HEX HEAD CAP SCREW - 3/4-10NC X 2.00 LG
25	1000503	24	S.A.E. GR.2	HEX HEAD CAP SCREW - 5/8-11NC X 1.50 LG
26	4001723	1	410 STN STL	EXTRACTION BEDPLATE, 3/16 DIA PERFORATIONS
27	1002115	20	17-4 PH	HEX HEAD CAP SCREW - 5/8-11NC X 0.75 LG
28	4001251	1	CARBON STL	GUARD, BELT (RIGHT SIDE)
29	4001252	1	CARBON STL	GUARD, BELT (LEFT SIDE)
30	3012161	1	CARBON STL	GUARD, BULKHEAD SIDE
31	3012162	1	CARBON STL	GUARD, FEED SIDE
32	3012163	1	CARBON STL	GUARD, ACCEPT SIDE
33	3012164	1	CARBON STL	GUARD, MOTOR SIDE

THIS DRAWING IS ISSUED TO CERTIFY THE DIMENSIONS OF EQUIPMENT SUPPLIED BY BLACK CLAWSON

CUSTOMER-US GYPSUM COMPANY
MILL JACKSONVILLE, FLORIDA
CUSTOMER ORDER 22522517
SHARTLE ORDER 4871891
SERIAL NUMBER 97-FP-0144

THE BLACK CLAWSON CO.
SHARTLE DIV.
MIDDLETOWN, OHIO
DATE OF CERTIFICATION 3-24-97

C.A.D. DRAWING DO NOT UPDATE MANUALLY		* SEE SHEET #1		* * * * *	
DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED		No.	REVISION	ZONE	DATE
STANDARD TOLERANCES UNLESS OTHERWISE SPECIFIED		BY CHKD APPD. BY			
UNITS		Black Clawson Company			
INCH		SHARTLE DIVISION / STOCK PREP SYSTEMS / PULP MILL PRODUCTS			
MILLIMETER		MIDDLETOWN, OHIO			
ONE PLACE DECIMAL ±0.3		TITLE ASSEMBLY - FOR			
TWO PLACE DECIMAL ±0.15		MODEL 150-34 FLOAT PURGER			
ANGULAR ±0.5°		DRAWN M. BROWN			
THREE PLACE DECIMAL ±0.005		DATE 05 FEB 1997			
FOUR PLACE DECIMAL ±0.0005		THIRD ANGLE PROJECTION			
FIFTH PLACE DECIMAL ±0.00005		SCALE 1/8			
SIXTH PLACE DECIMAL ±0.000005		CHECKED [Signature]			
SEVENTH PLACE DECIMAL ±0.0000005		DATE 3-24-97			
EIGHTH PLACE DECIMAL ±0.00000005		APPROVED [Signature]			
NINTH PLACE DECIMAL ±0.000000005		DATE 3-24-97			
TENTH PLACE DECIMAL ±0.0000000005		750 DRG. No. 48718910-3			
ELEVENTH PLACE DECIMAL ±0.00000000005		REV 1			
TWELFTH PLACE DECIMAL ±0.000000000005		SHEET 3 OF 3			