


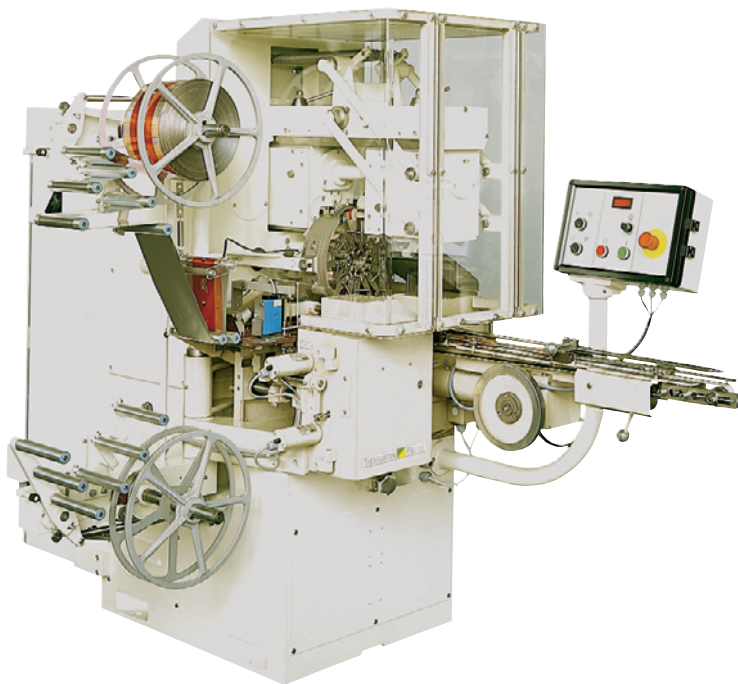

Output

- Double twist wrap without photo-electric print registration: up to 400 pieces/min
- Double twist wrap with photo-electric print registration: up to 350 pieces/min
- »Fringed« wrapping styles: up to 300 pieces/min
- »protected twist«: up to 270 pieces/min

Product dimensions

- Length: 20 – 75 mm
- Width: 13 – 29 mm
- Height: 8 – 25 mm
- Diameter at bottom: 13 – 25 mm

Wrapping styles

- Double twist wrap

Drive

- 0,95 kW

Connected load

- 2,5 kVA

Wrapping material

- All common materials can be used.

Material dimensions

- Reel diameter: up to 350 mm
- Reel width: up to 150 mm
- Core diameter: 40 – 70 mm


Measurements

- Length: 2190 mm
- Width: 1420 mm
- Height: 1600 mm

Weight

- approx. 1070 kg

Wrapping machine for deposited or enrobed chocolate products with or without center-filling in double twist wrap (or »protected twist« upon request)

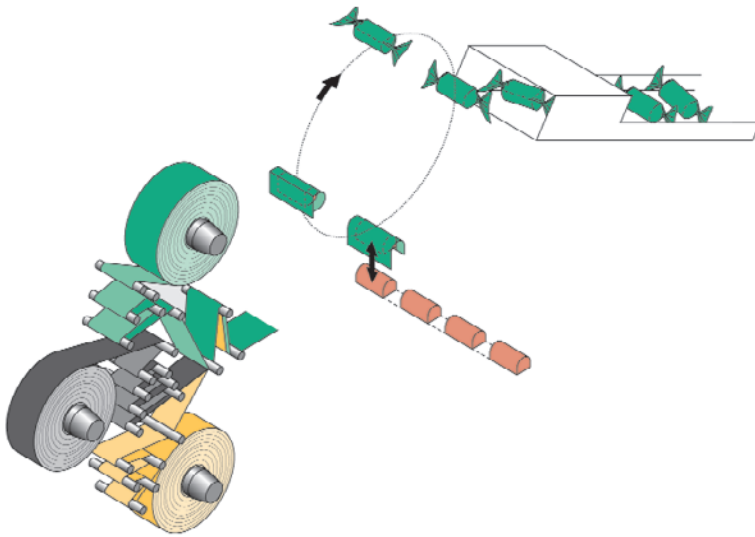

Wrapping machine for deposited or enrobed chocolate products with or without center-filling in double twist wrap (or »protected twist« upon request). The products are aligned by means of a feeding and separating station and are conveyed to the wrapping station by a feeding belt. A low accumulation pressure of the product in the feeding section is achieved by an automatic speed control.

Special features

- PLC control
- Quick size change by the exchange of a few size parts only
- Saving of wrapping material by »no product – no paper« -device
- Infinitely variable adjustment of the twist gripper oscillation depending on the wrapping material

Optional Extras

- Photo-electric print registration
- Additional reel holder when using a third wrapping material
- Special versions for »fringed« wrapping styles
- Airtight wrapping (»protected twist«)

Operation

- Easy operation via a clearly arranged panel with fault indication
- Excellent accessibility for operation and maintenance
- Easy cleaning due to swivable material feed units

Combinations

- The EU7 can be provided with an automatic feeding and separating device, type MG5, and can directly be synchronised to the production line.

THEEGARTEN-PACTEC GmbH & Co. KG
 Breitscheidstraße 46
 D – 01237 Dresden
 Tel.: 0049/351-25 73-0
 Fax: 0049/351-25 73-329
 pactec@theegarten-pactec.de
 www.theegarten-pactec.de

THEEGARTEN PACTEC
 The smarter solution in packaging.