

Dionex AS-AP autosampler

Advanced features

Perform full-loop, partial-loop, limited sample, sample preparation, sample dilution, precolumn derivatization, matrix elimination, sample preconcentration, and more. With so much application flexibility, even your most difficult analytical challenges can now be fully automated.

Speed

The Thermo Scientific™ Dionex™ AS-AP autosampler offers the speed required to support Fast IC applications. With fast cycle times (<30 s for 5 µL injection) and high sample capacity (from 81 × 10 mL vials to 1152 samples with micro well plates) the Dionex AS-AP provides the speed and capacity required for high-throughput laboratories.

Simultaneous and sequential analysis


Double your sample throughput using a single autosampler. The Dionex AS-AP autosampler runs both simultaneous and sequential analysis to dramatically improve laboratory productivity. The simultaneous injection technique accelerates analysis by using one autosampler to supply a single sample to two systems running unique or similar applications. Sequential analysis introduces two unique samples to two systems running unique or similar applications using only one Dionex AS-AP module.

New advanced automation features

In-line sample conductivity, pH measurement, and fraction collection options offer a level of automation and convenience unmatched by any other IC autosampler. The Dionex AS-AP Sample Conductivity and pH Accessory—the first in an IC autosampler—allows in-line measurement of the sample conductivity and pH prior to injection. Thermo Scientific™ Chromeleon™ Chromatography Data System (CDS) triggers can then be used to either inject the sample or modify the sample prior to injection. The Thermo Scientific™ Chromeleon™ Fraction Collection License enables collection of sample fractions using time or peak-based methods for fraction collection.

Application flexibility

The Dionex AS-AP autosampler can be configured to accommodate the most complex matrices. From 0.25 mL to 5 mL syringes, and 10 mL vials to 0.10 mL well plates, you now have the flexibility to mix and match features to suit your needs. The sample preparation option automates dilution, internal standard addition, and precolumn derivatization, thus simplifying complex methods. In addition, as all wetted surfaces are inert, there is no need to compromise when it comes to running metal-sensitive samples or corrosive buffers.

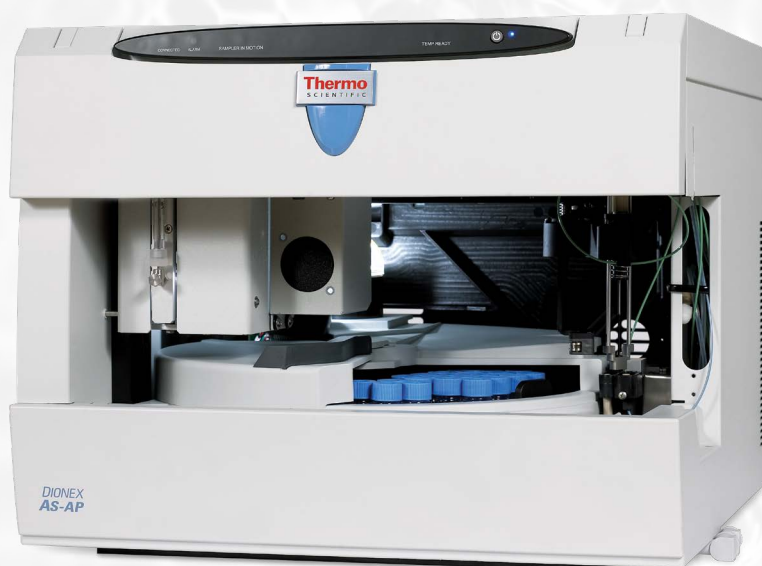

The powerful Dionex AS-AP autosampler provides a full suite of automation capabilities that elevate laboratory productivity to new heights. Flexible, customizable, and easy to use, the Dionex AS-AP autosampler establishes a high standard for laboratory automation performance.

Sample concentration/matrix elimination

Achieve the lowest possible detection limits on your most difficult analyses with sample concentration/matrix elimination. With these powerful sample preparation tools, even the most complex tasks can now be automated. The Dionex AS-AP autosampler simplifies each step with powerful Chromeleon software wizards and the option of front panel control.

Precise performance

The Dionex AS-AP autosampler provides accurate and consistent performance for all your sampling needs. From small sample volumes to large-loop or concentrator loading, sample delivery is precise, reliable, and accurate with every injection.

Temperature control

Temperature control is ideal for thermally sensitive samples including carbohydrates, amino acids, organic acids, proteins, peptides, and nucleic acids. The Dionex AS-AP autosampler reliably controls the sample environment to help ensure that even the most reactive samples are safely maintained in the sample tray.

Fully inert PEEK needle and flow path

The unique Thermo Scientific™ PEEK™ needle design and flow path protect sensitive samples from metallic contamination and help ensure compatibility with aqueous and reversed-phase eluents.

Reliability

Load the Dionex AS-AP autosampler and walk away. With fully integrated communication feedback and audit trails, the Dionex AS-AP autosampler performs every assigned automation task and tracks each activity. Equipped with the option for rugged, electrically actuated Rheodyne valves, the sampler completes each task with ease and confidence.

Automatic resampling

The AutoDilution option of the Chromeleon CDS adds the power of automatic decision making to the Dionex AS-AP autosampler. The AutoDilution program evaluates your data, determines if any sample concentrations are out of range, and automatically re-analyzes only the samples that require it. Samples can be transferred to another vial and diluted automatically before reinjection, or different volumes can be automatically reinjected using either a partial-loop or a different injection loop altogether if the system is equipped with a 10-port valve.

Dionex AS-AP autosampler features:

Parameter	Specification
Syringe size	100, 250, 1000, and 5000 µL
Injection	Electrically actuated Rheodyne valves
Vial size	10 mL polystyrene vials 1.5 mL glass vials 0.3 and 1.5 mL polypropylene vials 0.10, 0.45, 0.5, and 2.0 mL well plates
Sample capacity	10 mL vials—81 samples 0.3 or 1.5 mL vials—120 samples 0.45, 0.5, or 2 mL—three well plates, 96 wells per plate 1152 samples—three well plates, 384 wells per plate
Heat/cool	4–60°C
Flow path	PEEK
Applications	Simultaneous and sequential injection, concentration, matrix elimination, dilution, and fraction collection

Ordering information

AS-AP autosampler

Description	Part no.
Dionex AS-AP autosampler, base configuration	074921
Dionex AS-AP autosampler, with tray temperature control option	074926
Dionex AS-AP autosampler, base configuration, 10mL trays and vials	079656
Valve assembly, includes one 2-way port valve and mounting hardware	074122
Valve assembly, includes one 2-way 6-port valve and mounting hardware	074123
Secondary 2-way 10-port valve (use with either above valve assembly)	070208
Secondary 2-way 6-port valve (use with either above valve assembly)	070209
Dionex AS-AP autosampler 10 mL vial tray	074938
Dionex AS-AP autosampler 1.5/0.3 mL vial tray	074936
Dionex AS-AP autosampler support tray for deep well plates	074939
Dionex AS-AP autosampler 8-position 10 mL vial tray	069877
Vial kit, 10 mL polystyrene with caps and blue septa, 100 each	074228
Vial kit, 10 mL polystyrene with caps and septa, 100 each	055058
Vial kit, 1.5 mL glass with caps and septa, 100 each	055427
Vial kit, 0.3 mL polypropylene with caps and septa, 100 each	055428
Vial kit, 1.5 mL polypropylene with caps and septa, 100 each	061696
Well plates, 96 micro-well, 0.5 mL, round (U) wells, (pkg of 10)	066332
Well plates, 96 micro-well, 0.45 mL conical (V) wells, (pkg of 20)	066333
Well plates, 96 deep-well, 2 mL wells, (pkg of 5)	066334
Well plate covers for 0.45 mL and 0.5 mL well plates, (pkg of 10)	066335
Well plate covers for 2 mL well plates, (pkg of 10)	066330

Note: Micro-well plates mount on the top of the 1.5/0.3 mL vial trays (PN 074936)
 Deep-well plates mount on the top of the deep-well plate support tray (PN 069877)

AutoPrep system

Description	Part no.
AutoPrep System for Dionex ICS-5000 DC with installed Automation Manager, includes sample and standard loops	066342
AutoPrep System plus Automation Manager, for new installations or Dionex ICS-5000 DC without installed Automation Manager, includes pre-plumbed Automation Manager, sample and standard loops, and 10-port valve	066343
AutoPrep installation (recommended)	038677
AutoDilution license	069725

AS-DV autosampler

Description	Part no.
Dionex AS-DV autosampler	B51004313
Dionex AS-DV autosampler for 0.5 mL vials with vial adapters	B51004314
6-port valve kit	068920
10-port valve kit	068921
PolyVials and 20 µm filter caps, 250 each, for 5 mL vials	038141
PolyVials and 20 µm filter caps, 250 each, for 0.5 mL vials	038142
PolyVials and plain caps, 250 each, for 5 mL vials	038008
PolyVials and plain caps, 250 each, for 0.5 mL vials	038010
Vial holder for 0.5 mL vials	068948
Sample tip replacement kit	040835
Peak performance kit	055647
Cap removal tool	068925

AS-HV autosampler

Description	Part no.
Dionex AS-HV with 24 position rack for 250 mL	064051
Syringe pump option	064506
AXP pump option	064507
External peristaltic pump	064508
Trace analysis cover	064052
Sample probe kit, PEEK	064511
Sample probe kit, PTFE lined and sleeved	064056
Additional sample rack, 250 mL Nunc, 24 position	064233
Additional sample rack, 250 mL Nalgene™ poly bottles, 15 position	064234
250 mL Nunc tissue culture flask, (pkg of 50)	064053
Caps and septa for tissue culture flask (pkg of 50)	064235
250 mL Nalgene bottle, narrow mouth (pkg of 72)	064236
Caps and septa for 250 mL Nalgene bottle, narrow mouth (pkg of 72)	064232

The AS-HV autosampler can hold up to 3 of the racks below (<i>only one type</i>)	Part no.
Sample rack for 50 mL vials (30 mm o.d.) 21 position	064498
Sample rack for 26 mL vials (24 mm o.d.) 24 position	064499
Sample rack for 15 mL vials (20 mm o.d.) 40 position	064500
Sample rack for 10 mL vials (16 mm o.d.) 60 position	064501
Sample rack for 60/40 mL Thermo Scientific™ Dionex™ ASE Accelerated Solvent Extractor collection vials 21 position	072733
Split septa for 60 mL Dionex ASE™ vials* (pkg of 72)	064256

* Dionex ASE vials must be run without the standard thick septa. 40 mL Dionex ASE vials must be run without septa.