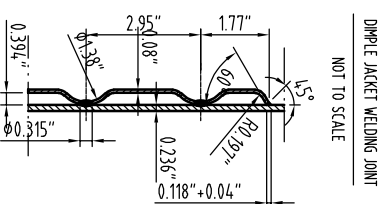
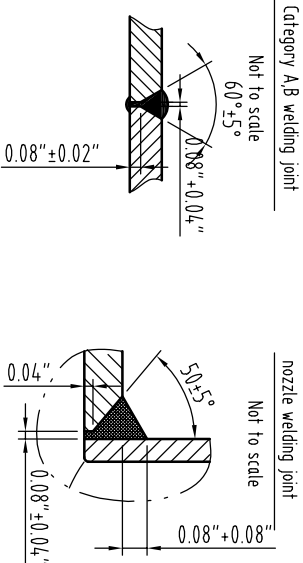
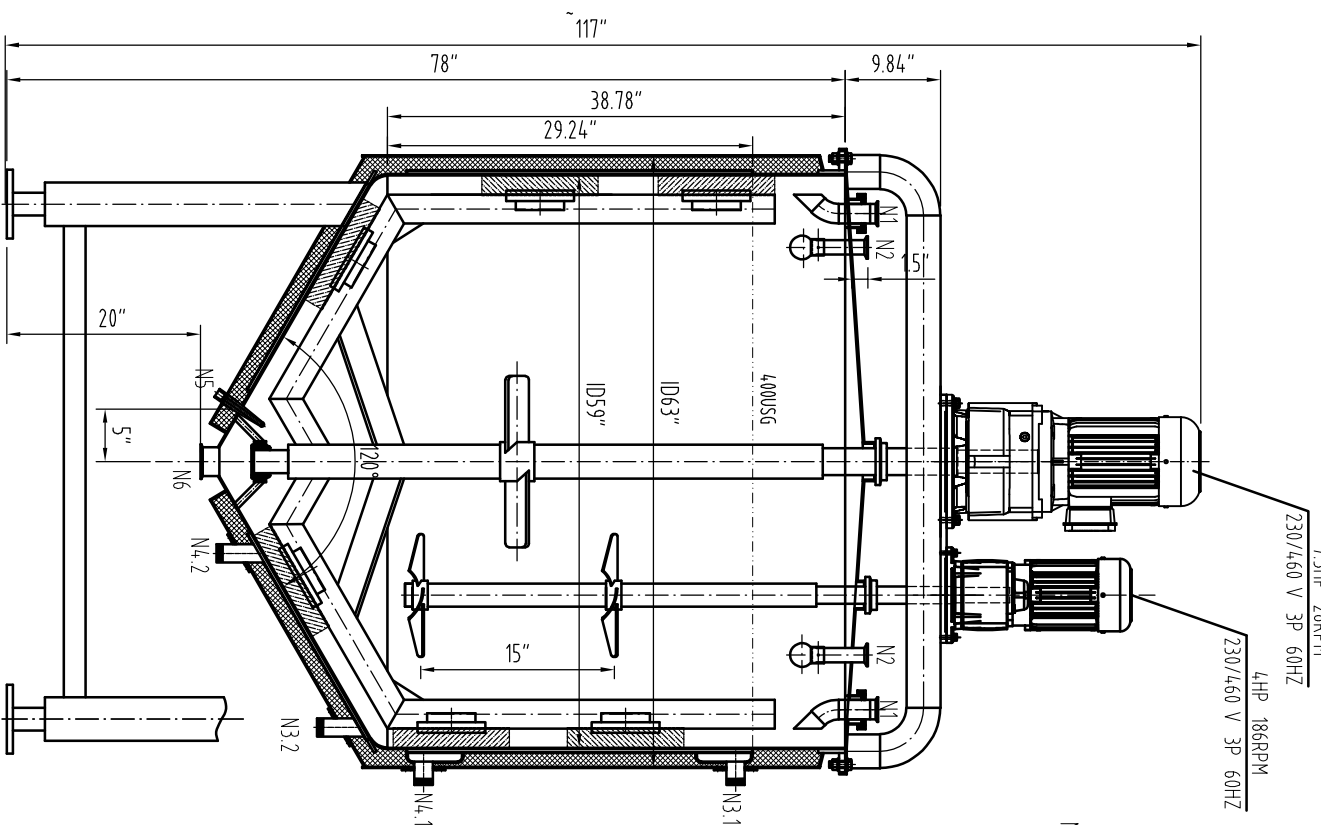
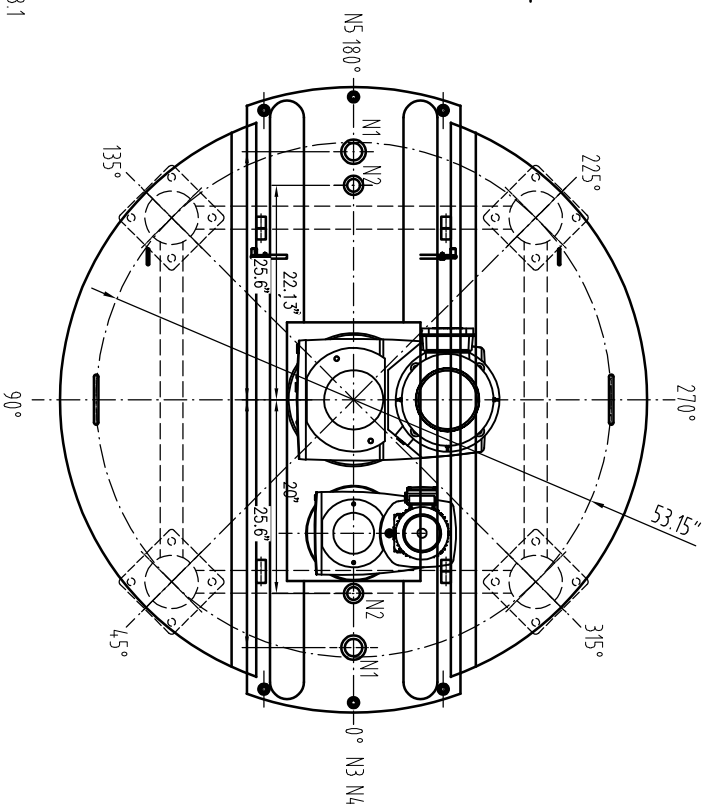


CODE ASME BPVC SECTION VIII DIVISION 1 2025 EDITION.

[illegible]

Technical Requirement

- Having a carbon content not exceeding 0.10% and produced with filter metals conforming to sifa-5.9.
- Unless otherwise specified, all the groove welding joints for pressure parts are of full penetration type, continuous, and shall be welded as per the wps designated by jic. finished longitudinal and circumferential joints conform to UW-35.
- Unless otherwise specified, does not indicate the size tolerance and see the program file 0.4HD-PO-03-2011.
- 4.Interior finish : ra0.8;Exterior finish: Ra0.8.
- 5.The user shall be in charge for installing safety devices in outer pipe system connected to this tank, and to ensure the pressure in the tank not exceeding its MAWP pressure.
- 6.This equipment's packing and Transportation shall conform to the regulation of [Pressure Vessel Coating and Transportation Packing], JB4711-2003.

	REVNO	DESCRIPTION	REMOVED BY	APPROVED BY	DATE
3					
2					
1					
SHANGHAI HONGDA INDUSTRY CO., LTD					
PREPARED BY					
CHECKED BY					
APPROVED BY					
400USG mixing tank			SCALE	W7	WEIGHT
			REV	1	TOTAL PAGE: 1
GENERAL DRAWING					
DRAWING NO.	Shanghai-Hongda-HA-109				
PURCHASER NUMBER	Zc-ZYF-A-HA				