
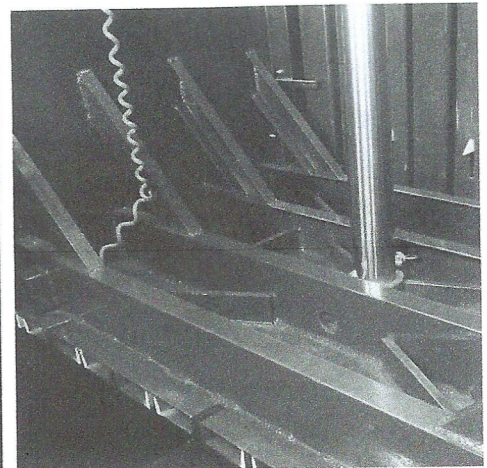
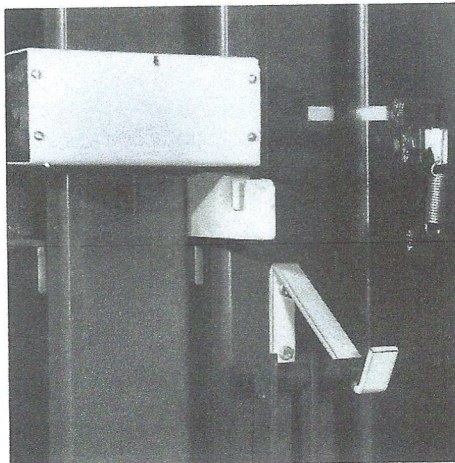


EPCO SERIES 2000

MODEL EX-2000
MODEL AP-2000

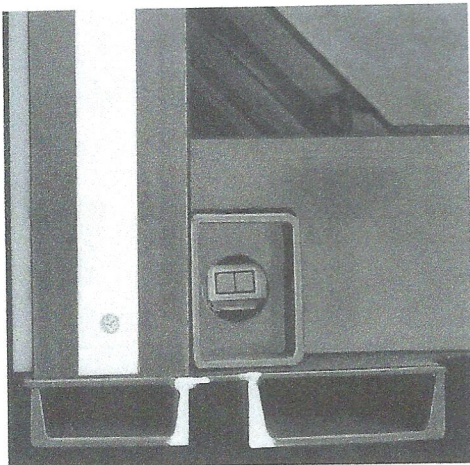

EPCO's Series 2000 balers are built to meet the expanding needs of material recovery facilities, warehouses, factories, military bases, transfer stations, and other solid waste facilities that require separation or processing. The Series 2000 are the most advanced vertical downstroke balers available.

The units can be hand-fed. Fed with self dumping hoppers. Fed by a hydraulic cart dumper with containers up to 1¼ cubic yards. Or, be fully automated to interface with conveyor systems for plastics, ferrous or non-ferrous metals, and other recyclables.

From General Motors plants in the heart of Texas to General Mills plants on the Great Lakes; from recycling centers in London, Ontario, to a full scale MRF in Kingston; from military bases in Norfolk and Quantico, Virginia to Point Mugu, California, the EPCO Series 2000 are reducing costs, saving hours of labor, and providing the confidence and flexibility in a baling system to be a cost saver and opportunity maker day after day.

AP-2000

- 8" hydraulic cylinder 65" stroke
- 20 HP power unit with Regen
- Over 100,000 lb. platen pressure
- Extra heavy duty hinge system
- Floor/Frame support system
- 1/4" structural steel sides and door
- Special capping on platen

This incredible machine comes in two models. The EX-2000 processes cardboard, aluminum cans and other standard recyclable materials. The AP-2000 is for high volume and hard-to-process materials.

STANDARD FEATURES — SERIES 2000

- Hi-impact engineered frames and platens
- Semi-automatic quick release ejection system
- Electric eye prevents gate movement during upward motion
- 72H x 48W x 44D Feed Opening
- 177 Cu. Ft. Loading Capacity
- Roller guides and nylon strip guides prevent cylinder side loading
- Multiple retractable and fixed retainer dogs (hold downs)
- Gradual release turnbuckle with dual grease fittings

EX-2000

- 7" hydraulic cylinder, 65" stroke
- High torque 15 HP power unit with Regen
- 90,000 lb. platen pressure
- Hi-impact structural steel tubing frame and reinforcements
- Heavy duty ram and guide system
- 1/4" wall hinges, machined and full length on door and latching mechanism

OPTIONS

- HYDRAULIC CART-DUMPER SYSTEM
- COLLAPSIBLE TRAY
- REAR LOAD CHUTE WITH HYDRAULIC CLOSURE
- INCLINE CONVEYOR WITH HOPPER
- EXTRA RETAINER "DOGS" (MATERIAL HOLD DOWN)
- WIRE GUIDES
- SINGLE PHASE 220V MOTOR
- NEMA 4 WEATHERPROOF CONTROL BOX
- VOLTAGE: CANADIAN 575V OR INTERNATIONAL, 3 PHASE
- TANK HEATER
- BALE SIZER WITH BALE-FULL LIGHT
- BALE-FULL INDICATOR BEACON
- CRATING: EXPORT/DOMESTIC
- PAINTING: SPECIAL EPOXY OR COLOR
- FRONT LOAD/REAR EJECT
- FRONT LOAD/REAR LOAD/FRONT EJECT