


TEXWRAP **MODEL 2218**

Fully Automatic In-Line Sealer

 ADVANCED WRAPPING INC.

 TEXMAC INC.

- Easy to Operate
- Versatile For Almost Any Application
- Simple to Maintain
- Provides Maximum Efficiency
- Safety Interlocks For Operator Protection

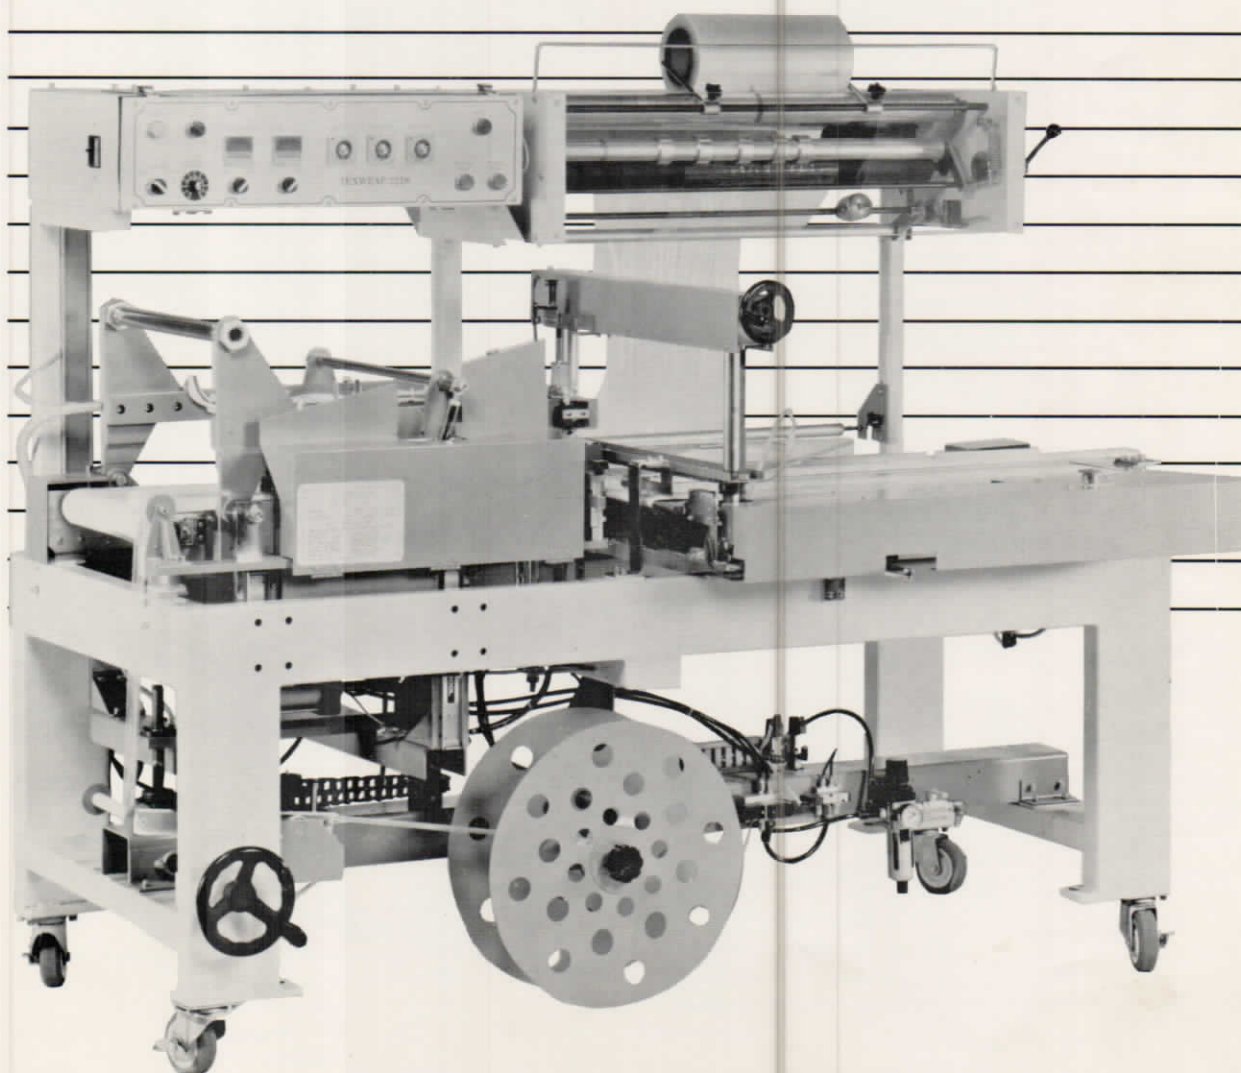

TEXWRAP MODEL 2218 In-Line Sealer

Standard Features


- Fully automatic product indexing and package length adjustment by either horizontal or vertical electric eye can accommodate any package configuration.
- Thermostatically controlled, universal hot knife seal system provides efficient long term operation.
- Easy to operate hand wheels for package height and width adjustment.
- Lay-on film cradle with power film unwind.
- Self-contained film scrap wind-up system with adjustable tension control.
- Unique film feed system allows wrapping of non-rigid products.
- Adjustable leveling legs with locking casters.
- Perforator for air evacuation.
- Film Miser

Operation

Product is fed inline onto the infeed conveyor. The infeed conveyor smoothly advances the product into the centerfolded film and sealing area by means of electric eyes which sense the front and back of the product. While the sealing head is activated, the belt advance is stopped, preventing another package from entering the sealing area. Once the sealing jaw opens, the conveyor is activated, discharging the wrapped product into the shrink tunnel.

Specifications

Model:	2218
Seal Size:	18 $\frac{1}{8}$ " x 22 $\frac{5}{8}$ " (460mm x 575mm)
Electrical:	110 Volt/1 Phase/15 Amps
Air Required:	1 C.F.M. @ 70 PSI
Speed:	Speeds up to 30 packages/ minute at 50 ft./min. con- veyor speed
Package Size:	Minimum: 4"L x 2 $\frac{3}{4}$ "W Maximum: 21"L x 16"W Maximum: 8"High
Film Width:	Minimum: 6" Maximum: 26" Proper Size: $H + \frac{1}{2}H + W + 4"$
Machine Dimensions:	78 $\frac{3}{8}$ "L x 31 $\frac{1}{2}$ "W x 62"H
Machine Weight:	Approx. Net: 990 lbs Approx. Shipping: 1100 lbs.

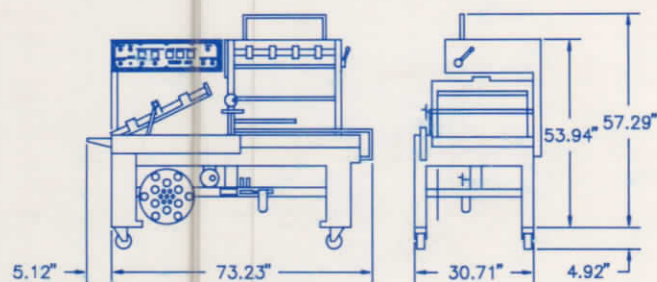

Options

- Closing Conveyor (To accommodate small items, minimum 2"L x 2 $\frac{3}{4}$ "W)
- Mechanical Hole Punch
- Stainless Steel
- Cast Iron Seal Blades
- Light Product Discharge
- Product Separator Stop
- Center Folder
- Static Eliminator
- Print Registration
- Film Printing System
- Tearstrip System (TM)

Central, Mountain & Pacific Time Zones:



ADVANCED WRAPPING, INC.

1647 Headland
Fenton, MO 63026
Telephone: (314) 343-0034
Facsimile: (314) 343-8347

Eastern Time Zone & Canada:



TEXMAC INC.

3001 Stafford Drive
P.O. Box 668128
Charlotte, NC 28266-8126
Telephone: (704) 394-0314
Facsimile: (704) 392-1621

Local Distributor: