

← BACK



Data subject to change without notice. Always confirm the data is correct from the seller.

KEM 363U/EMC

EMC Switches 10-630A

- Electromagnetic compatibility ensures safe operation in environments with electromagnetic disturbance
- Tested according to EMC EN 61000-6-3:2007+A1(2011) with EMC- glands shielded power cable
- IP66; Enclosure types U2, U3, A2, A3
- IP65; Enclosure types TR02, TR03, TR04
- Available in polycarbonate up to 125 A, aluminium up to 160 A and sheet steel up to 630 A
- Also available in TR02, TR03 and TR04 enclosures
- Padlockable
- EMC cable glands included
- Door interlock with defeat mechanism
- Tested according to IEC 60947-3
- Also available with 4, 6 or 8-poles
- **Note!** Al-cables cannot be connected directly to switch terminals. For Al-cable connection please use a bi-metal cable connector, **available here**.

Technical datasheet >>

Accessories




PRODUCT CARD

MORE INFORMATION

PRODUCT DETAILS

SKU	KEM 363U/EMC
AC-21 400/415 V (A)	80 A
AC-21 690 V (A)	80 A
AC-22 400/415 V (A)	63 A
AC-22 690 V (A)	63 A
AC-23 400/415 V (A/kW)	40 A / 22 kW
AC-23 690 V (A/kW)	40 A / 37 kW
Cable Area to Switch Terminal (mm2) / Bolt size	2.5-35
Cable Gland	2xM32
Color	Standard
EAN	6419410329238
Enclosure	U3
Enclosure Type	Polycarbonate
IP Rating	66
Number of Poles	3
Operation	Front-operated
Switch type	Load Break Switch
Weight (kg)	0.8

DIMENSIONAL DRAWING

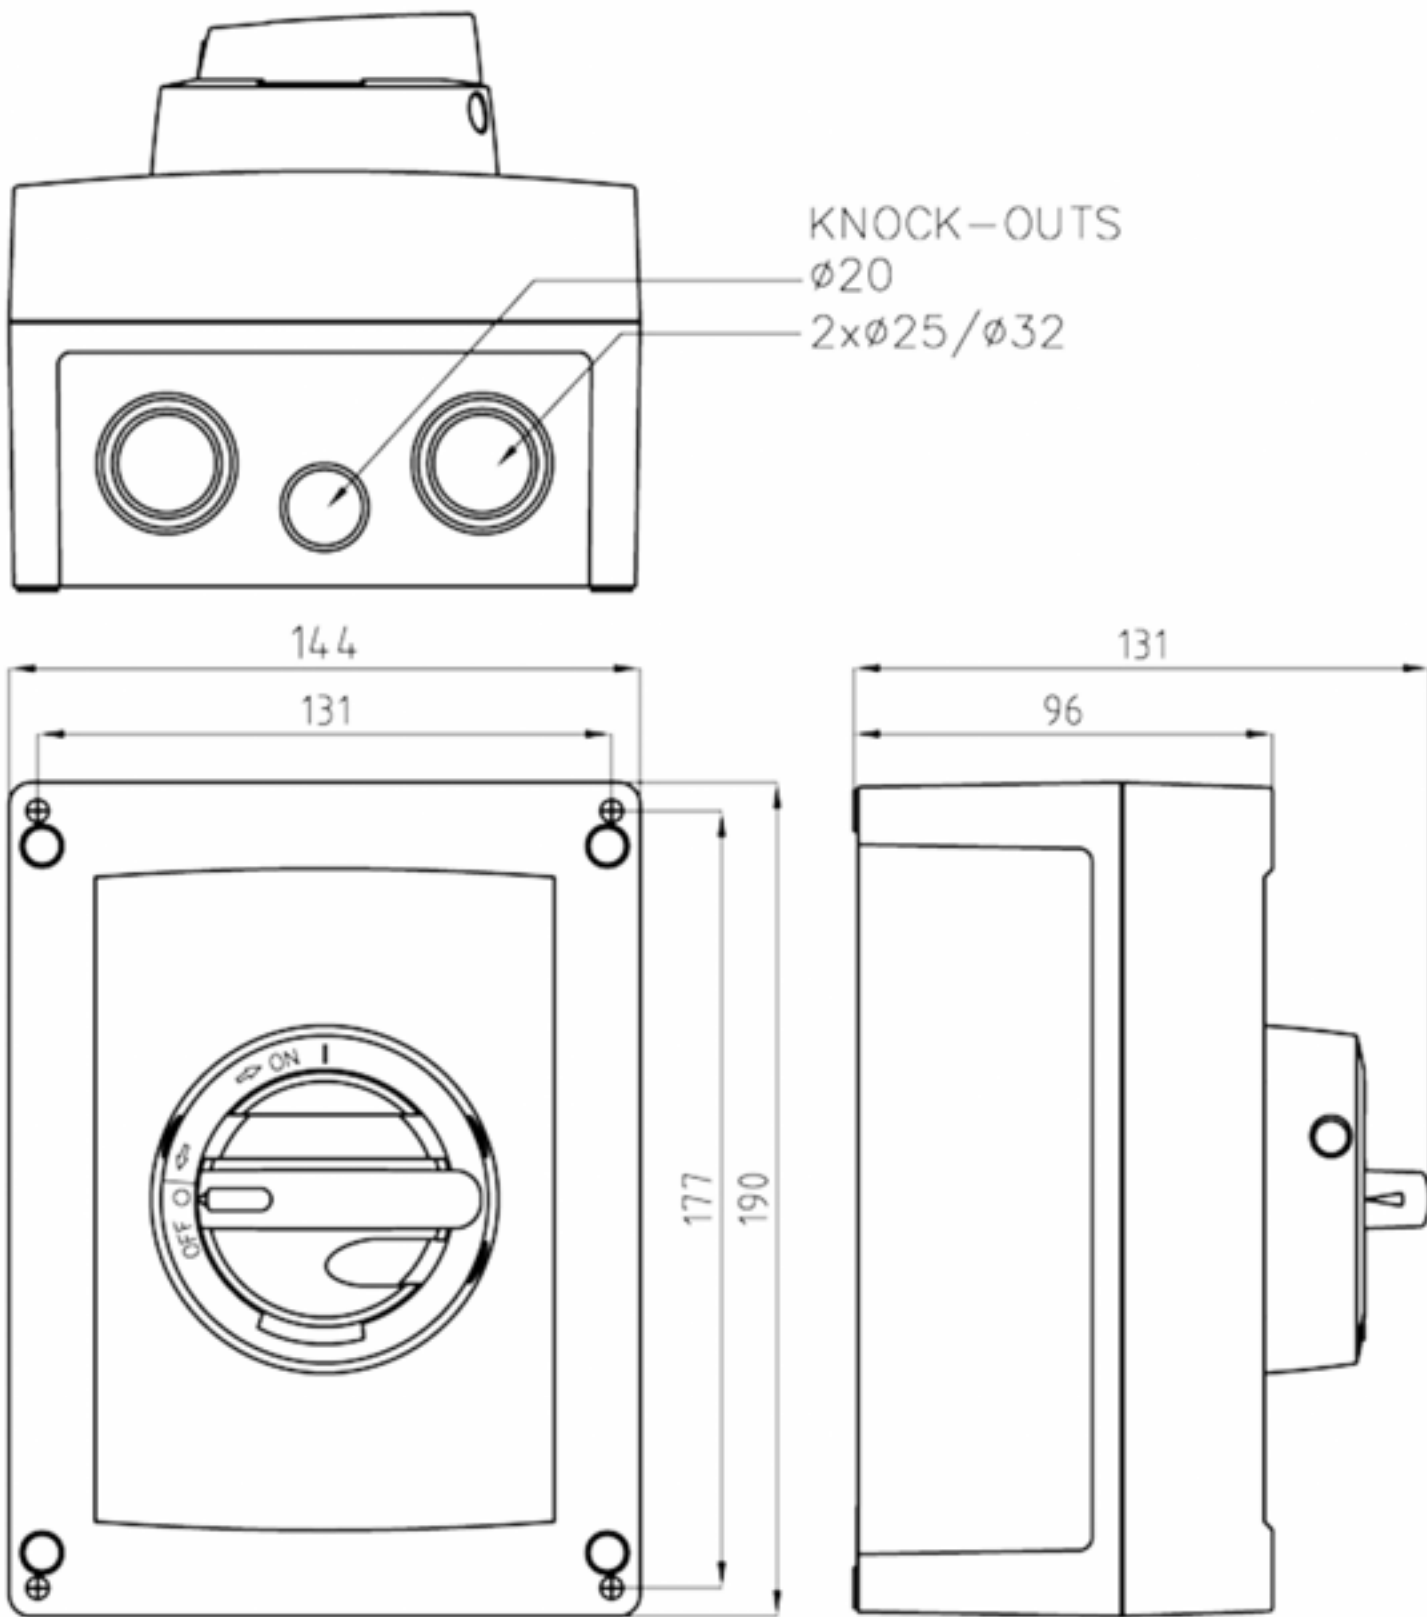

Email

SEND »