

Semi-Automatic Stretch Wrapper

ORBIT 16

HORIZONTAL ROTATING RING STRETCH WRAPPERS



Automatic rotating ring machine for spiral wrapping is ideal for large size boxes.

PERFORMANCE FEATURES:

R-CONNECT READY

Developed to provide usage and performance data via the cloud. Allowing you to connect with your machines remotely to investigate alarms, adjust parameters, & respond promptly.



COLOR TOUCH SCREEN

Intuitive 7" color touchscreen control panel provides quick and easy access to machine operation. Up to 20 custom programs can be stored and recalled.



FILM CARRIAGE UNIT

The film carriage unit has a direct breaking transmission roller and it is adjustable at any time. It also eases spool loading and film insertion to a maximum. The spool carriage device is equipped with locking and quick release of the spool.



CUTTING AND CLAMPING UNIT

The automatic highly reliable dual rod clamping and cutting system fully automates the wrapping process.




INTUITIVE TOUCH SCREEN CONTROL PANEL WITH HIGH PROGRAMMING FLEXIBILITY

INCLUDES PRE-STRETCH CARRIAGE WITH CLUTCH TO SAVE FILM

AUTOMATIC CUTTING AND SEALING SYSTEM PROVIDES PERFECT PACKAGE FINISHING

WIDE RANGE OF ACCESSORIES PROVIDES CUSTOMIZED CONFIGURATION

ORBIT 16 SPEC SHEET

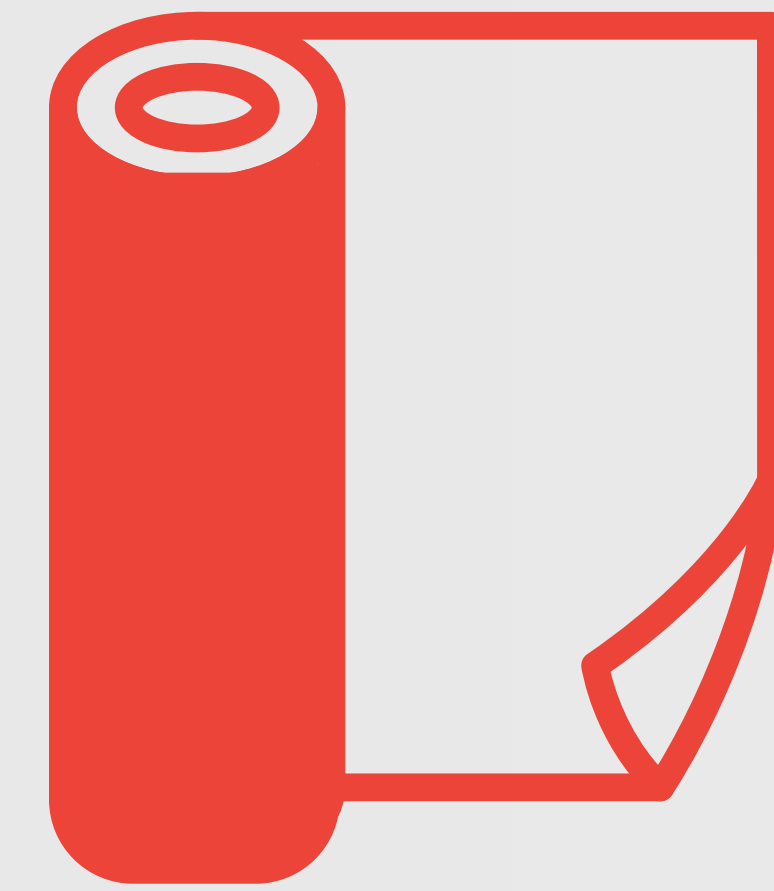

Film Delivery System

- Pre-stretch: carriage with 100% fixed pre-stretch
- Contact Film Tensioning
- Pneumatic Cold Cutting & Clamping Unit
- Film Width: 10"
- Maximum Ext. Diameter: 10"
- Core Diameter: 3"



Performance Criteria

- Max Rotation Speed 70 RPM
- Variable Conveyor Speed 9.8 – 62.34 (ft. / min.)



Utility Requirements

- Power supply voltage: 480 V, 3 PH
- Working Pressure: 90 PSI
- Installed Power: 6.3 HP



Safety Features

- Emergency Stop Push Button
- Safety Guard Door and Switch

Operator Interface

- Control Panel: Icon driven color touch screen

ROBOPACUSA.COM

INFO.US@ROBOPAC.COM

