
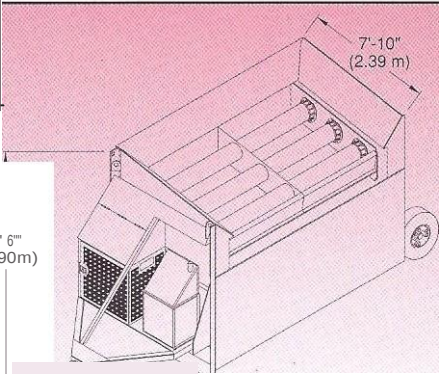


NORDBERG CV40D SCREENALL

**Highside View
(Travel Height)**

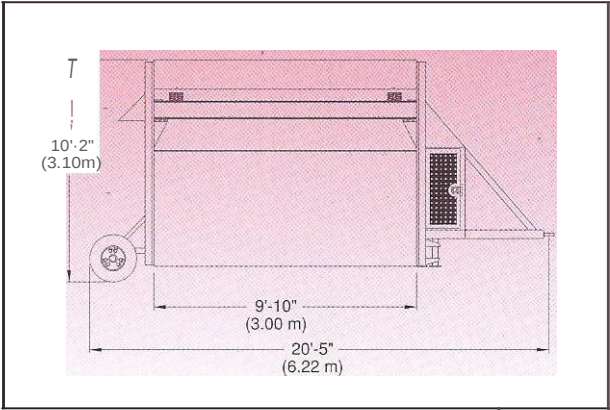

Lowside View Operational Height

Specifications

Axle weight capacity.....	8,000 lbs. (3,629 kg.)
Engine make	John Deere, 4 cyl., 40190
Engine type	Water cooled, diesel
Horsepower (kW)@ 1750 RPM	25 (18.7)
Fuel capacity (tank)	14 gal. (53 liters)
Brakes	Electric
Major working components	All hydraulic
Shakerhead area.....	7'-2"x6'- 6" (2.18 m x 1.98 m)
Loader bucket size range	1-3 yds.' (.8-2.3 m ³)
Screen sizes available	'4"-4" (6.35-101.60 mm)
Harp screen sizes available.....	1 mm-20 mm
Punch plate openings.....	3"-8" (76.2-203.2 mm)
Opening for bucket (under screen)	9'-10" (3.0 m)
Overall length	20'-5" (6.22 m)
Height (operational)	9'-6" (2.90 m)
Height (travel).....	10'-2" (3.10 m)
Width for hauling	7'-10" (2.39 m)
Weight	12,400 lbs. (5,625 kg.)
Tongue weight.....	7,200 lbs. (3,266 kg.)
Towing arrangement	Pintle hook
Tires	2-9.0x17.5

Standard Features

- Patented bolt together shakerhead
- SKF spherical bearings
- Electrically actuated wheel brakes (airbrake option available}
- Patented hydraulically operated lifting system
- Automatic shut-down system with indicator lights
- Tamper-proof hour meter
- Locking engine compartment
- Tail lights and directional signals
- Emergency break-away system
- Integral hydraulic control valves