

VEGA 750-S

**Servo Driven High-Speed
Side Seal Bag Maker**



VALUE FOR TRUST

VEGA 750-S

Servo Driven High-Speed Side Seal Bag Maker

A work horse machine from MAMATA..Machine is a specially designed for manufacturing of PP/BOPP Garment Bags, Detergent Bags & Salt Bags. It is a simple yet fast entry level machine for converters with medium scale manufacturing requirement.

Specifications :

Types of Webs / Films	HM-HDPE / LDPE / LLDPE / PP / CPP / BOPP	
Thickness of the Films (microns)	Maximum	Minimum
• HM-HDPE	80	10
• LDPE / LLDPE	100	25
• PP	75	25
• CPP	45	25
• BOPP	40	20
Processing Data	Maximum	Minimum
Web Width (mm)	750 #	100
Draw Length (mm)	750	50
Maximum Speed (Cycles/Minute)	250	
Motors		
Off-Wind	PMDC Motor	
Film Index / Film Draw	AC Servo Motor	
Main Drive (Sealing Head)	PMDC Motor	
Product Conveyor Drive	PMDC Motor	
General		
Power Supply **	AC, 3 Phase, 415 ± 6% Volt, 50 Hz	
Air consumption at NTP (Liters/Minute)	500 (For Air Cushion Delivery- Optional)	
Foot Print (L x W x H) (mm)	3800 x 1500 x 1500 (Basic machine without Unwinder)	
Machine Weight ***	~ 1.3 MT (Basic machine without Unwinder)	

* Depending on Type of Bag, Material, Thickness, Width, Draw-length & Type of job being processed


** Special Power Supply Condition on request

*** The Machine weight given is indicative only

Maximum Usable/Processing Width of Machines may be varying with attachments used

Attachments :

- | | | |
|---|---|---|
| <input type="checkbox"/> Unwinders | <input type="checkbox"/> Longitudinal Perforation Wheel | <input type="checkbox"/> Tape Inserter and Applicator |
| <input type="checkbox"/> Folders (A-Frame) | <input type="checkbox"/> Lip / Flap Formation | <input type="checkbox"/> Auto Stacker |
| <input type="checkbox"/> Air shafts and Safety Chucks | <input type="checkbox"/> Bottom Gusseters | <input type="checkbox"/> Punches |
| <input type="checkbox"/> Electric Edge Position Control (EPC) | <input type="checkbox"/> Seal Heads for Different Films | <input type="checkbox"/> Customer's Special Requirement |
| <input type="checkbox"/> Film Reel Exhaust Sensor | <input type="checkbox"/> Dotted Seal Head | |

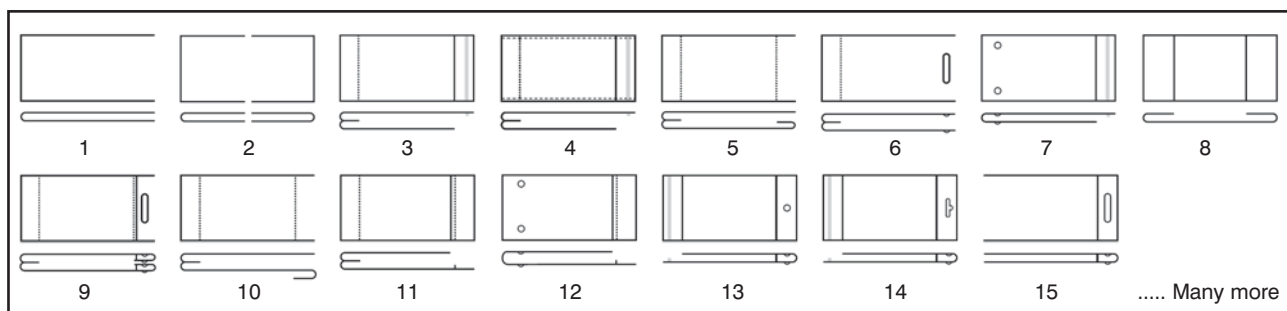

Photographs may show attachments or accessories, which may not be part of the standard scope of supply. The company reserves the right to modify, alter, change or substitute any feature & specifications which are subject to change without notice.

India Office & Works :



Survey No. 423/P, Sarkhej - Bavla Highway, Moraiya,
Tal.: Sanand, Dist.:Ahmedabad - 382 213, INDIA.
Phone:+91 2717 300700 • E-mail : sales@mamata.com
Website: www.mamata.com



USA Office :



2275, Cornell Ave., Montgomery, IL-60538, USA.
Phone : +1 630 801 2320 • Fax : +1 630 801 2322
E-mail : info@mamatausa.com
Website : www.mamatausa.com